

**MIDWAY**

October 1993  
16-40029-101

# **MORTAL KOMBAT II**



## **OPERATIONS MANUAL**

**Operation & Adjustments • Testing & Problem Diagnosis  
Parts Information • Wiring Diagrams & Schematics**

# MORTAL KOMBAT II

## Instructions



*Insert Coin(s)*

*In a two player game, the loser pays and the winner stays.*

*Press the Punch and Kick buttons to attack an opponent.*

*Use the joystick to make the screen player jump or duck, and move left or right.*

*Use joystick and button combinations to discover secret moves.*

# **MORTAL KOMBAT II**

## **TABLE OF CONTENTS**

### **Section 1 Operation and Troubleshooting**

<b>Safety.....</b>	1-2
<b>Set-up Procedure</b>	
Installation & Inspection.....	1-3
Location Requirements.....	1-3
Cabinet Assembly Diagram.....	1-4
<b>Servicing.....</b>	1-6
<b>Game Features</b>	
Starting-up.....	1-8
Player Controls.....	1-8
Control Panel Diagram.....	1-8
<b>Game Operation</b>	
Control Switches.....	1-9
Control Switch Location Diagram.....	1-9
<b>Menu System Operation</b>	
Operation.....	1-10
Main Menu.....	1-10
Diagnostic Tests.....	1-11
Switch Test.....	1-11
DIP Switch Test & Table.....	1-12
CPU & Sound Tests.....	1-13
Monitor Patterns & Burn-in Test.....	1-14
Coin Bookkeeping.....	1-15
Game Audits.....	1-16
Game Adjustments.....	1-17
Standard Pricing Table.....	1-19
Custom Pricing Table.....	1-20
Utilities.....	1-21
Volume Adjust.....	1-22
<b>Troubleshooting.....</b>	1-23

### **Section 2 Parts Information**

Cabinet Hardware, PC Boards.....	2-2
Control Panel Assembly, Fluorescent Lamp Assembly, Speakers, Transformer Assembly.....	2-3
Cables, Monitor, Manuals.....	2-4
Power Supply Switcher Assembly.....	2-5
CPU Board Assembly.....	2-6
CPU Board Parts.....	2-7
Memory Expansion Board Assembly.....	2-8
Memory Expansion Board Parts.....	2-9
Sound Board Assembly .....	2-10
Sound Board Parts.....	2-11

### **Section 3 Diagrams and Schematics**

JAMMA Chart & Interboard Wiring.....	3-2
Cabinet Wiring Diagram.....	3-3
Power Wiring Diagram & Transformer Chart.....	3-4
CPU Board Schematic.....	3-5
Memory Expansion Board Schematic.....	3-27
Sound Board Schematic.....	3-33
Electronic Rack Interboard Wiring Diagram.....	3-38

# **MORTAL KOMBAT II**

**S E C T I O N  
one**

---

---

**Operation**

## Safety Notices

The following safety instructions apply to all game operators and service personnel. Specific warnings and cautions will be found throughout this manual where they apply. We recommend that you read this page before preparing your game for play.



### CAUTION

**AC POWER CONNECTION.** Before connecting the game to the AC power source, verify that the "line voltage selection chart" jumper wires are installed correctly for the line voltage in your area. For details, refer to Section 3.

**PROPERLY GROUND THE GAME.** To avoid electrical shocks, do not plug in the game until it has been inspected and properly grounded. MIDWAY games should only be plugged into a grounded 3-wire outlet. Shocks will also result, if the control panel is not properly grounded! After servicing any parts on the panel, assure that the ground wires are secure. Only then should you lock up the game.

**DISCONNECT POWER DURING REPAIRS.** To avoid electrical shock, disconnect the game from the AC power source before removing or repairing any part of the game.

**USE THE PROPER FUSE.** To avoid electrical shock, use the replacement fuse which is specified in the parts list for this game. The replacement fuse must match the original fuse in fuse type, voltage rating, and current rating.

**MONITOR PRECAUTIONS.** When removing or repairing the monitor, extra precautions must be taken to avoid electrical shock because high voltages may exist within the monitor circuitry and cathode ray tube (CRT) even after power has been disconnected. Do not touch internal parts of the monitor with your hands or metal objects! Always discharge the CRT by the following method: Attach one end of a large, well-insulated, 20-kV jumper to ground. Momentarily touch the free end of the grounded jumper to the anode by sliding it under the anode cap. Wait two minutes and discharge the anode again.

**HANDLE FLUORESCENT TUBE AND CRT WITH CARE.** If you drop a fluorescent tube or CRT and it breaks, it will implode! Shattered glass can fly eight feet or more from the implosion.

### ATTENTION !

**PROPERLY ATTACH ALL CONNECTORS.** Make sure that the connectors on each printed circuit board (PCB) are properly connected. If they do not slip on easily, do not force them. A reversed connector may damage your game and void the warranty. All connectors are keyed to fit specific pins on each board.

## Setup Procedure

### INSTALLATION & INSPECTION

1. Remove all items from shipping container and set them aside. Inspect the exterior of the cabinet for any damage.
2. The keys are either taped to the coin return slot, or attached to joystick. Unlock and open the coin and cash box doors. Remove the leg levelers and spare parts which are stored in the cash box.
3. Remove the rear door of the cabinet. Inspect the interior for any signs of damage. Check all major assemblies to assure that they are mounted securely.
4. Tilt or lay the cabinet down. Locate the four threaded holes on the bottom of the cabinet (one in each corner), and install one leg leveler (with its hex nut) in each hole.
5. Stand the cabinet upright and make certain that it is in a stable position. Level the cabinet.
6. Refer to the game's Cabinet Wiring Diagram (section 3), and check to see that all cable connectors are correctly secured. DO NOT FORCE CONNECTORS. Watch for damaged connectors and avoid making reversed connections.
7. Determine the value of your line voltage with a meter. Then, check the power input wires to the main power supply transformer. Be sure they are connected to taps which correspond to your local line voltage value. If necessary, reconnect the power input wires to the transformer in accordance with the Transformer Chart in section 3.
8. Lay the line cord (connected to the Power Chassis) in the slot along the bottom edge of the rear cabinet door. Replace the rear cabinet door. Close and lock the front coin and cash box doors.
9. Connect the line cord to a grounded (3-terminal) AC wall outlet.
10. Switch On the game, using the On/Off switch located on the upper left rear of the cabinet, to verify proper operation.

### Game Location Requirements

#### Power

Domestic 115V @ 60 Hz  
Foreign 230V @ 50 Hz

#### Temp.

32° F to 100° F  
(0° C to 38° C)

#### Humidity

Not to exceed 95% relative.

### Cabinet Statistics


#### Dimensions

Width 27"  
Depth 41"  
Height 73"

#### Weight


Approx 402lbs

## Cabinet Assembly

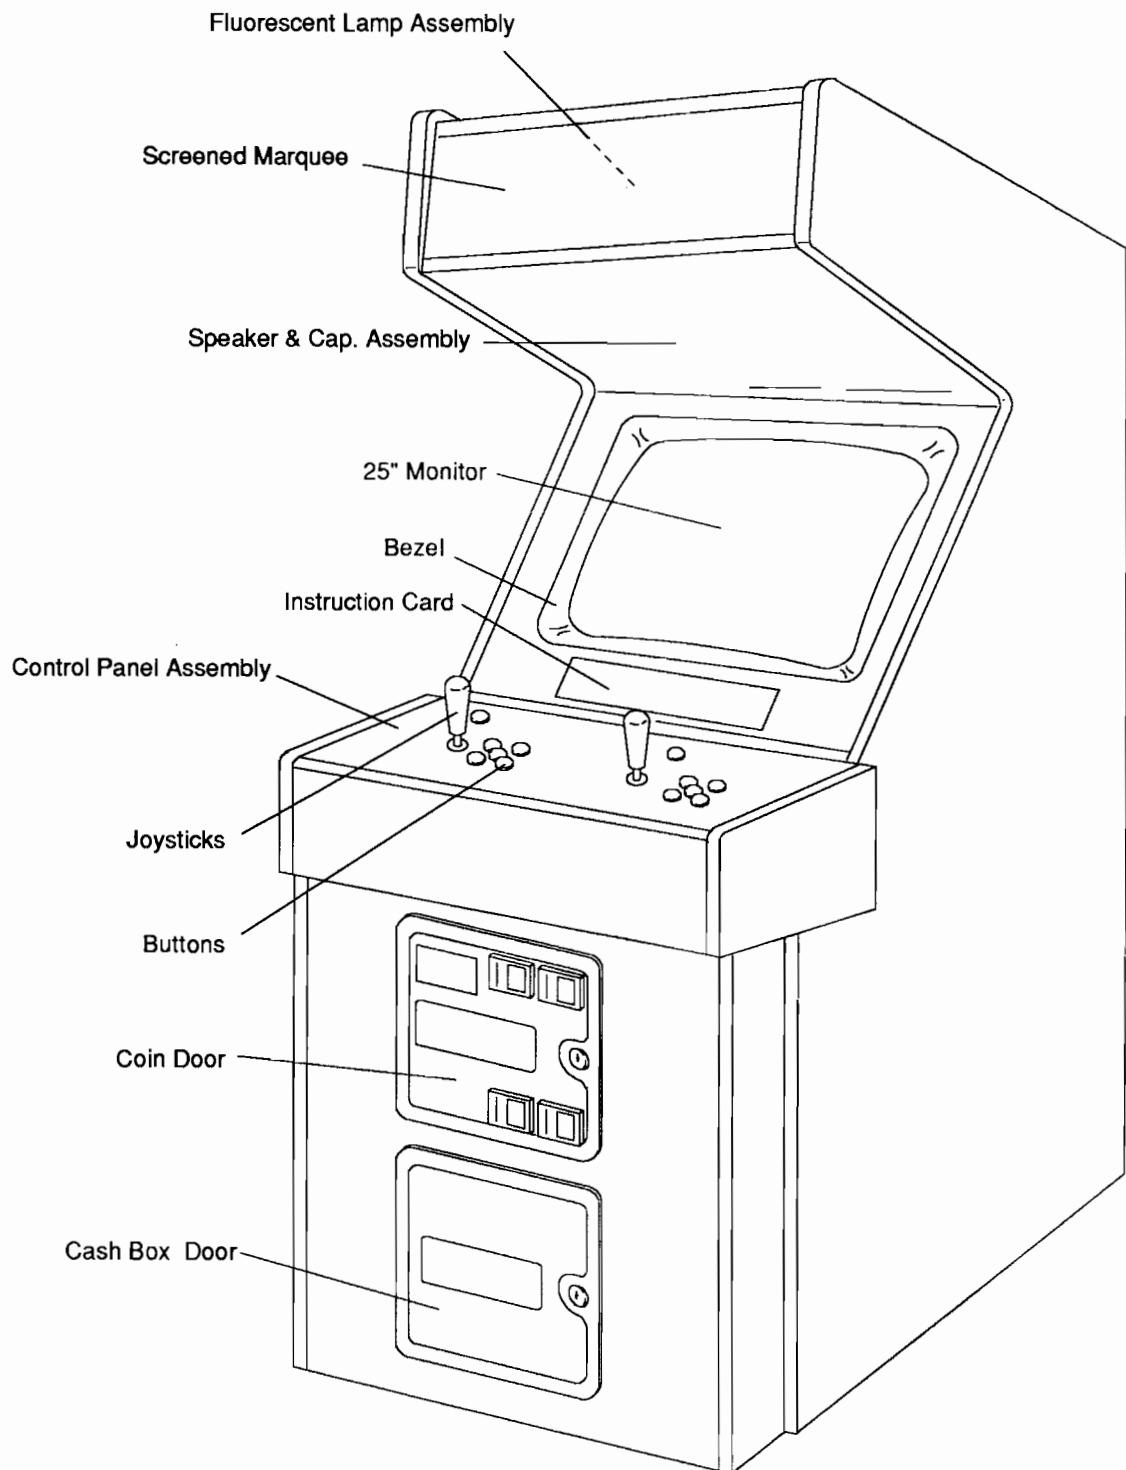

Front View

## Cabinet Assembly

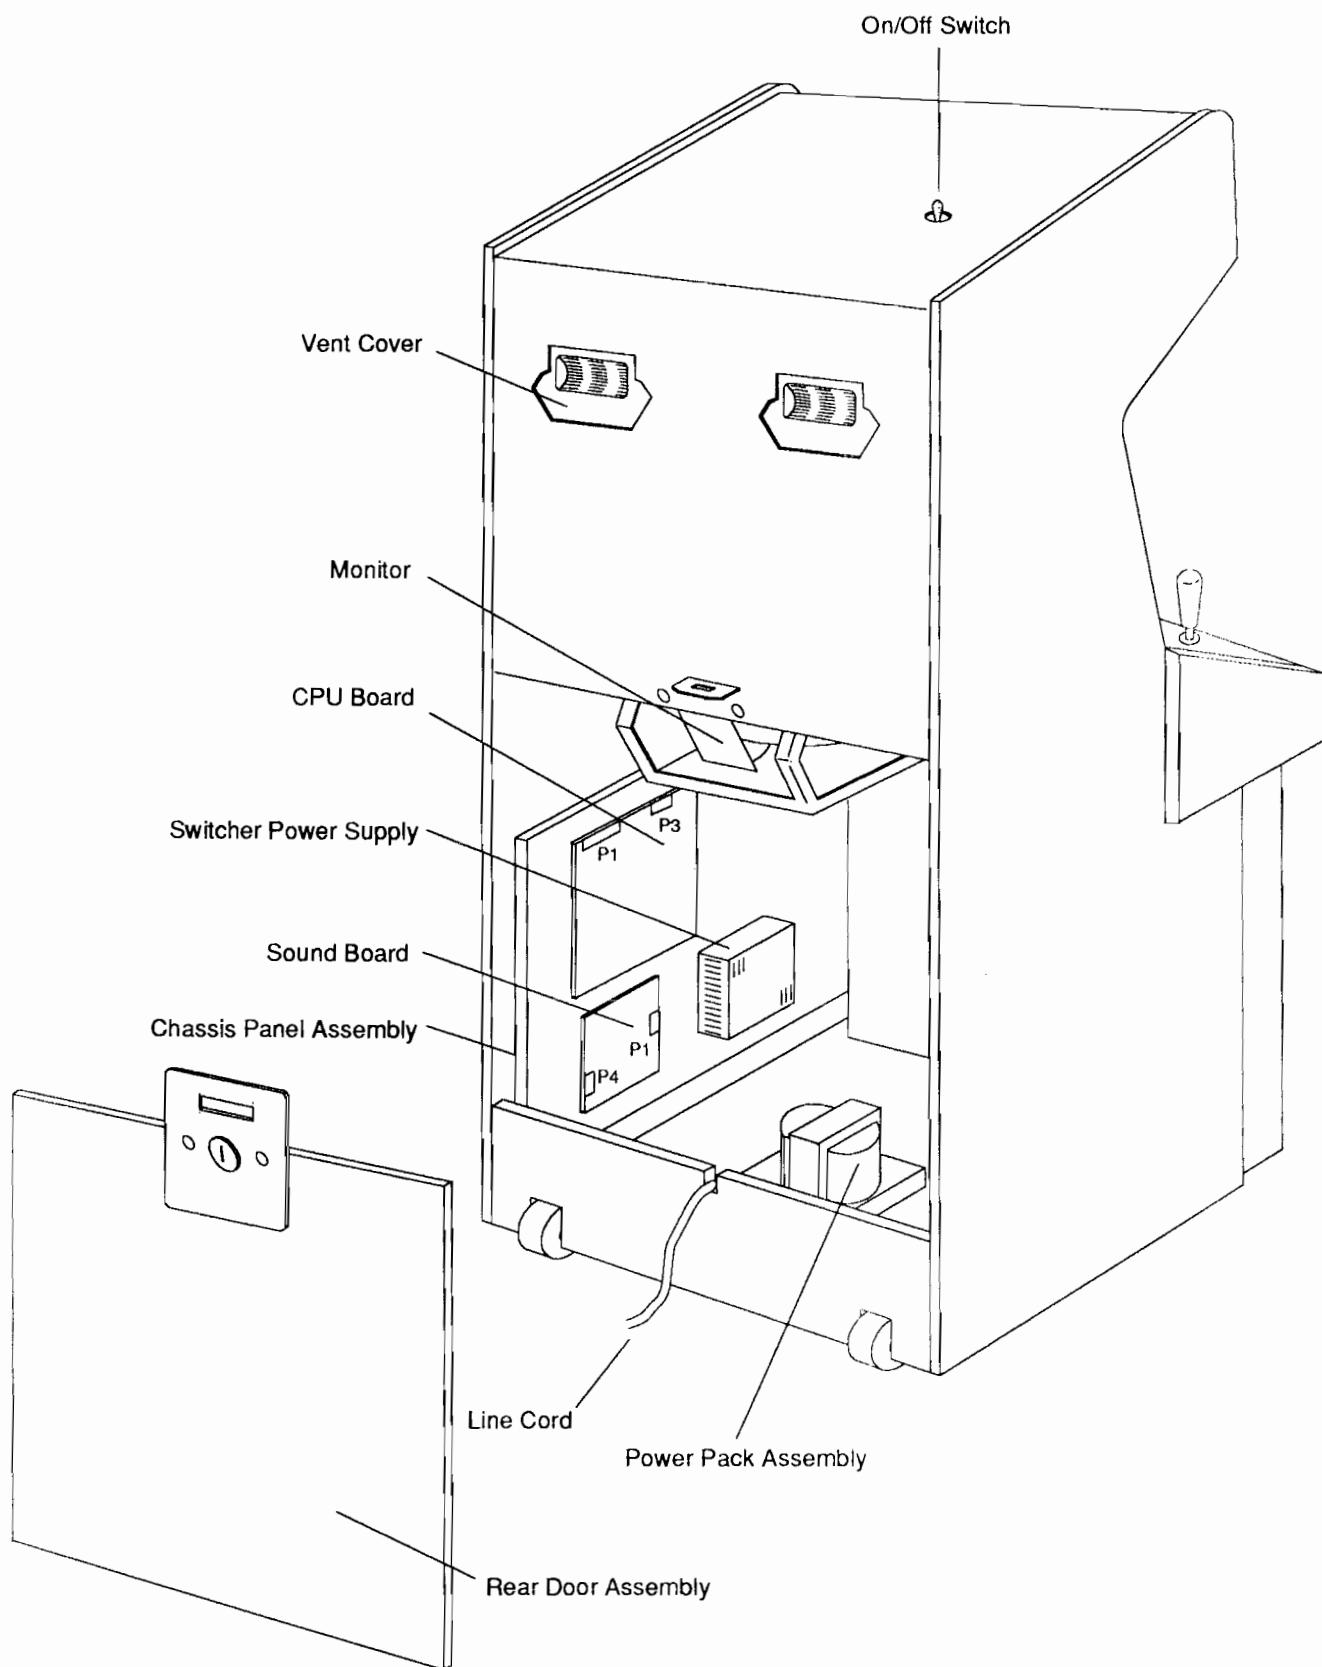

**Rear View**

## Servicing

### ■ Servicing the Control Panel

Switch off power to the game and open the coin door. The control panel is held in place by two latches (located inside the cabinet) which provide constant pressure on the strikes. To release the latches, reach through the coin door opening toward the left and right sides of the cabinet. *Do not reach straight back through the coin door opening or you could damage the monitor control board.* Lift the latch handle and unhook the wire fasteners. Grip the joysticks and carefully tilt the control panel back on its hinge.

To return the control panel to its normal position, carefully lean it forward until it rests on the cabinet. Be careful not to let it slam down onto the cabinet, or to pinch any wires. Always reclasp the latches.



#### Caution

*The monitor DOES NOT contain an isolation transformer in its chassis (it is mounted instead in the Power Chassis Assembly located on the floor of the cabinet). When servicing the monitor on a test bench, YOU MUST ISOLATE THE MONITOR FROM THE LINE VOLTAGE WITH AN ISOLATION TRANSFORMER.*

### ■ Removal of Viewing Glass

Switch off power to the game, and open the control panel. Remove the five hex head screws and the black metal strip at the bottom of the viewing glass. Carefully, slide the glass from its side grooves and lift it clear of the cabinet.

### ■ Removal of Monitor Bezel

Switch off power to the game. Open the control panel and remove the viewing glass. Lift the bezel off of the monitor.

### ■ Monitor Replacement

*We recommend that you read the WARNINGS section thoroughly before beginning this procedure.*

Switch off power to the game. Remove the viewing glass and the monitor bezel. Completely disconnect the monitor from all of its cabling. Remove the four bolts securing the monitor's mounting flanges to its mounting panel. Pull the monitor carefully from the cabinet front.



#### Caution

*While removing the four bolts, firmly support the monitor from the front of the CRT so that it will not slip.*

## ■ Removal of the Marquee

Switch off power to the game. Remove the five hex head screws from the black strip on top of the cabinet. Remove the strip and carefully lift the marquee. Store the marquee carefully to prevent damage.

The fluorescent tube is now accessible for replacement. Remove the plastic lamp locks. Grasp the tube, give it a quarter turn, and remove it from its socket. Carefully place a new tube into the socket, and turn to reinstall.

## WARNING

Use care in handling. If you drop a fluorescent tube and it breaks, it will implode!

## ■ Removal of the Fluorescent Light Assembly

Switch off power to the game. Remove the marquee glass. Disconnect the fluorescent light assembly from its power cable. Remove the screws that hold the assembly to the cabinet then lift out the assembly.

## ■ Removal of the Speakers

Switch off power to the game. Remove the marquee glass. The speakers come out from the front of the cabinet. Be sure to disconnect the cabling and remove the nuts and machine screws before attempting to remove the speakers from their enclosure. Carefully reinstall the seals upon completing any task in the speaker enclosure.

## ■ Volume Control, Begin Test Switch, and Service Credit Switch

Open the coin door. The game's volume control and diagnostic pushbutton switches are located on a small bracket on the door. The volume is controlled by the two center buttons. Depress the Volume Up or the Volume Down button until the desired sound level is reached. The Begin Test switch, on the right, activates the game's menu system. The Service Credit switch, on the left, allows credits to be allotted for service testing without affecting the game's bookkeeping total.

## Game Features

### Note

When an error is detected during Start-up Tests, game start-up does not progress, and an error message appears on the screen.

### STARTING UP

Switch on power to the game. A "rug" pattern appears on the CRT screen. When the "rug" pattern ends, the screen shows CHECKING SCRATCH RAMS, and then CHECKING ROMS. The next screen shows MORTAL KOMBAT II REVISION LEVEL, CMOS TEST OK and the COIN SETTING. The game then begins the Attract Mode.

Insert the desired amount of coins, bills or tokens. Press the appropriate Start button. Use the joysticks to select an on-screen player. Use a control panel button to lock in the selection. The game starts automatically.

### Player Controls

#### Start Buttons

Each player has a Start button which allows him/her to begin or continue play.

#### High Kick/High Punch Buttons

Allows the on-screen player to kick or punch an opponent in the upper body.

#### Low Kick/Low Punch Buttons


Allows the on-screen player to kick or punch an opponent in the lower body.

#### Block Buttons

Allows the on-screen player to block an opponent's punch, kick or special move.

#### Joystick

Allows the on-screen player to move, flip, jump and duck.

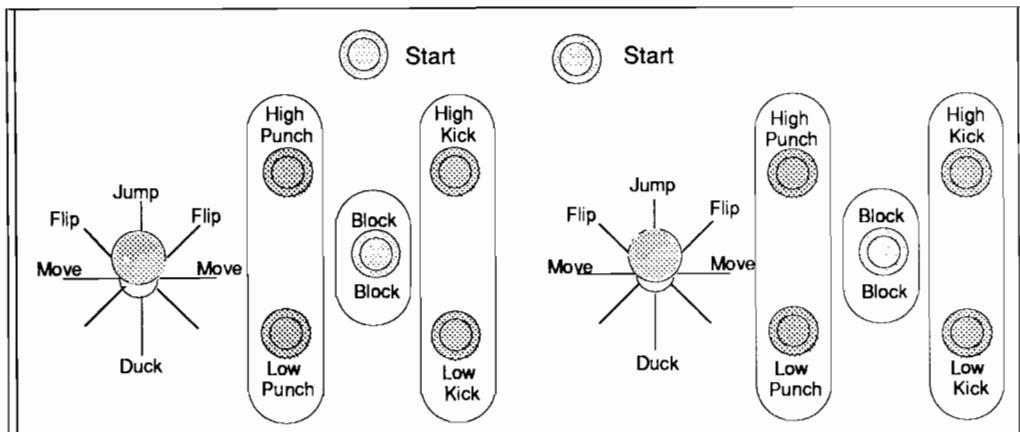


Control Panel

## Game Operation

The **MORTAL KOMBAT II** Control Switches are located inside the coin door.

### Control Switches

- The **Slam Tilt switch** detects any forceful vibrations against the coin door. This eliminates pounding for free games.
- The **Volume Down and Volume Up switches** increase or decrease the volume level of the music and speech. For greater profits, set your game's volume level at a nice loud setting.
- The **Begin Test switch** allows you to activate the game's menu system. Press the Begin Test switch to access the Main Menu. To exit the menu system, select EXIT TO GAME OVER from the Main Menu, then press any control panel button.
- The **Service Credit switch** is a special feature switch that allots credit without affecting the game's bookkeeping total.

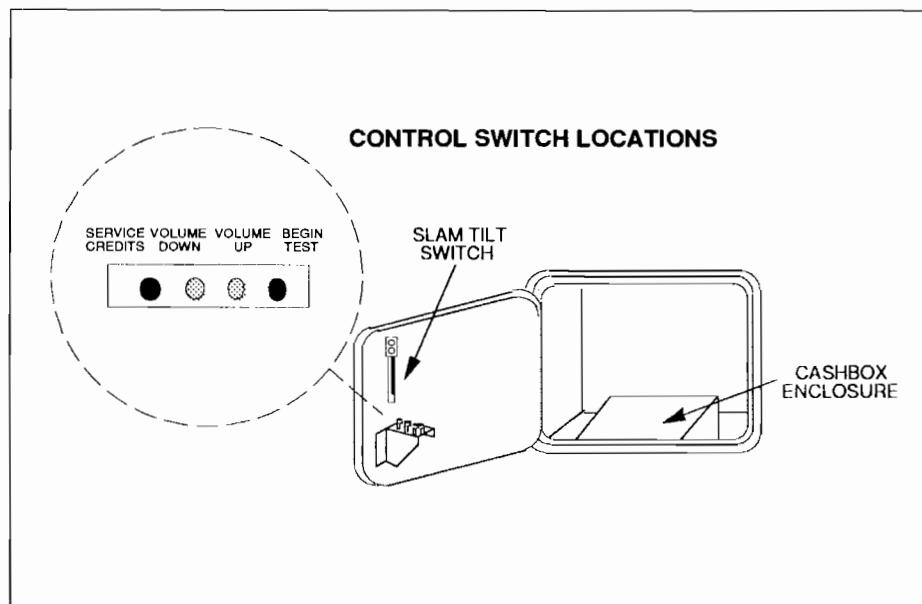

---

## Menu System Operation


### OPERATION

All **MORTAL KOMBAT II** Game Audits, Adjustments, and Diagnostics are options of the Main Menu. Each option in turn, has its own menu, listing several choices that you may act upon as desired.

Press the Begin Test switch on the coin door or close Switch #8 of DIP Switch Bank #2, to activate the Main Menu (shown below). Game adjustments, bookkeeping, and diagnostics are all accessible from this menu.


Move any joystick up or down to cycle through the menu options. Notice that the options are highlighted in sequence. Press any button to activate a highlighted option.

**Note:** Only highlighted options can be activated.

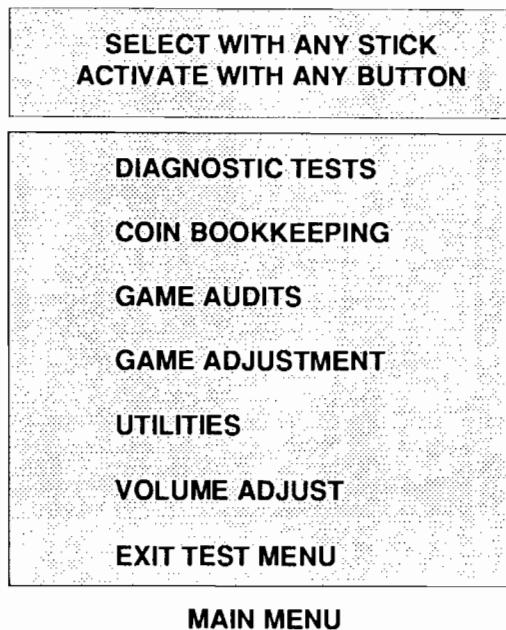

## **DIAGNOSTIC TESTS**

To enter the Diagnostic Tests from the Main Menu, move any joystick to select (highlight) the Diagnostic Test option and press any control panel button to activate the option.

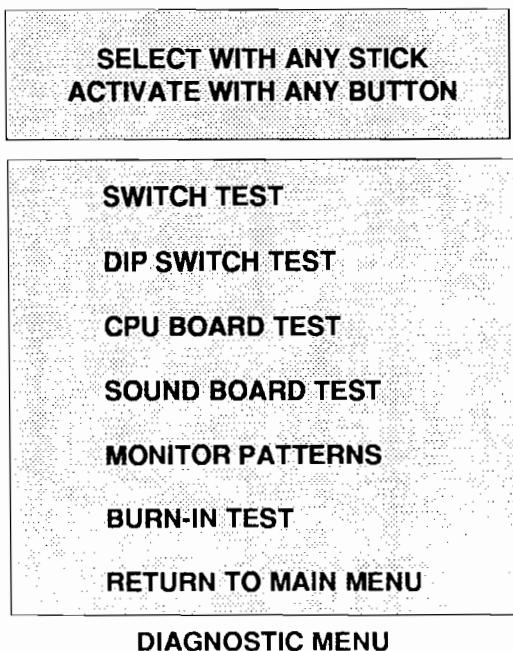

### **Switch Test**

The Switch Test allows the operator to test the switches on the control panel and the coin door.

Select the Switch Test by using any joystick to highlight the Switch Test option, then press any control panel button to activate the option.

During the Switch Test, the top of the screen shows the locations of the control panel switches. The bottom of the screen shows the locations of the coin door switches. Press a control panel switch and the switch location, on the top of the screen, lights. Press a coin door switch and the switch location, on the bottom of the screen, lights. Release the switch and the screen returns to normal.

Press the Start buttons together to return to the Diagnostic Menu.

## DIP Switch Test

The DIP Switch Test allows the operator to check the position of the two DIP Switches on the CPU Board. The operator can also change the setting of each position of each DIP Switch during this mode.

Use any joystick to select the DIP Switch Test and any control panel button to activate it. The screen displays their current settings.

To change a DIP Switch setting, press the switch to the desired setting, then check the screen to verify that the switch now shows the new setting.

Press any control panel button to return to the Diagnostic Menu.

**DIP Switch 1 Settings Table**

	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8
<b>Violence On</b>	Off *							
<b>Blood in game</b>	Off *							
<b>Low Blow in game</b>	Off *							
<b>Attract Sounds On</b>	Off *							
<b>Comic Offer On</b>	Off *							
<b>Dollar Bill Validator</b> Not Installed Installed	Off *							
<b>Not Used</b>	Off *							

**DIP Switch 2 Settings Table**

	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
<b>Coinage</b> DIP Switch CMOS	Off *							
<b>Coin Settings</b>								
USA 1    Ger 1    Fr 1	Off *	Off *	Off *					
USA 2    Ger 2    Fr 2	On	Off	Off					
USA 3    Ger 3    Fr 3	Off	On	Off					
USA 4    Ger 4    Fr 4	On	On	Off					
USA ECA    Ger ECA    Fr ECA	Off	Off	On					
N/U    N/U    N/U	On	Off	On					
N/U    N/U    N/U	Off	On	On					
Free Play    Free Play    Free Play	On	On	On					
<b>Country</b> USA German French Not Used	Off *	Off *	Off	On	On			
<b>One Counter</b> <b>Two Counters</b>	Off *							
<b>Test Switch</b> Game Mode Test Mode	Off *							

\* Indicates Factory Setting

## CPU Board Test

The CPU Board Test (much like the Start-up Test) allows the operator to check the RAMs and ROMs.

Select the CPU Board Test with any joystick, then press any control panel button to activate the automatic test of the CPU Board's RAMs and ROMs.

When this test is activated a "rug" pattern appears on the screen. The screen then changes to show the layout of the RAMs and ROMs. A ROM or RAM location that is shown as black with a white outline is used and should turn either red or green. A ROM or RAM location that is shown as gray with a white outline is not used in this game. During the test ROMs or RAMs are good if they turn green and they are faulty if they turn red.

The CPU Test pauses when a bad ROM or RAM is detected. Press any button to continue the test.

## Sound Board Test


This test allows listening to some of the sounds that this game is capable of producing.

Select the Sound Board Test with any joystick, then press any control panel button to activate it. The screen displays two test options.

**GENERAL TEST** analyzes the sound circuitry. The screen shows a list of error codes. A successful test causes a single "tone" to sound. Detection of a fault causes a series of tones or no tone at all to sound.

**PLAY SOUNDS** tests synthesized & digitized sounds from the Sound Board. Advance to the next sound by pressing any action button. Press either Start button to repeat a sound.

Select RETURN TO MAIN MENU or BACK TO DIAGNOSTIC MENU. Press any control panel button to activate your selection.

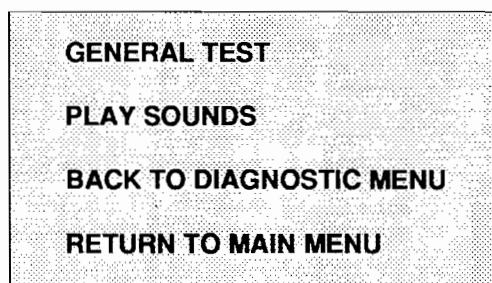

SOUND TEST MENU

## **Monitor Patterns**

The Monitor Patterns Test provides a menu for testing the monitor.

Select the test with any joystick and activate with any control panel button. Once in the Monitor Patterns Test, move any joystick to select a test option and press any control panel button to activate it. Press any control panel button again to return to the Monitor Patterns Test menu.



The **RED**, **GREEN** and **BLUE SCREEN** tests fill the screen with either red, green or blue.

The **COLOR BARS** test fills the screen with several shades of colors to help with red, green and blue level adjustments. Each color should appear sharp and clear.

The **CROSSHATCH PATTERNS** test fills the screen with a grid and a series of dots. The grid and the dots should be clear. The dots should appear round.

If any of the Monitor Pattern Tests shows a need for adjustment use the proper white knobs on the Monitor Board.

Use any joystick to select RETURN TO MAIN MENU or BACK TO DIAGNOSTIC MENU and activate with any control panel button.

## **Burn-in Test**

The Burn-in Test continually repeats the CPU Board Test. Move any joystick to select the Burn-in Test, then press any control panel button to activate the test. When the Burn-in Test detects an error, the test stops and displays an error message on the screen. The second page of the Audit Table specifies the number of Burn-in cycles successfully completed. Use this test to find intermittent CPU problems.

To exit this test switch the game Off then On again.

## **COIN BOOKKEEPING**

To enter the Coin Bookkeeping from the Main Menu, move any joystick to select the Coin Bookkeeping option, then press any control panel button to activate it.

The Coin Bookkeeping Table records the coinbox totals and game play counters. The left side of the table names the bookkeeping item and the right side shows the number of coins, credits, or plays for each item.

To exit Coin Bookkeeping, move any joystick to select RETURN TO MAIN MENU, then press any control panel button to activate it.

LEFT SLOT COINS	0
RIGHT SLOT COINS	0
THIRD SLOT COINS	0
FOURTH SLOT COINS	0
SERVICE CREDITS	0
PAID CREDITS	0
TOTAL PLAYS	0
<b>MORE DETAILED DATA</b>	
<b>RETURN TO MAIN MENU</b>	

**COIN BOOKKEEPING TABLE**

LEFT SLOT COINS	0
RIGHT SLOT COINS	0
THIRD SLOT COINS	0
FOURTH SLOT COINS	0
TOTAL COLLECTIONS	0
<b>CLEAR COIN METERS</b>	
<b>RETURN TO MAIN MENU</b>	

**TOTAL COLLECTION TABLE**

## GAME AUDITS

To enter Game Audits from the Main Menu, move any joystick to select the Game Audits option, then press any control panel button to activate it. To advance to the next (or return to the previous) page of the Game Audit Table, move any joystick to select either "Next Audit Page" or "Previous Audit Page", then press any control panel button to change the page.

The Game Audits Table records the game play statistics. The left side of the table names the Audit item the right side shows the amount of play.

HOURS GAME WAS ON	0
HOURS PLAYED WITH 1 PLAYER	0
HOURS PLAYED WITH 2 PLAYERS	0
TOTAL PLAYS	0
1 PLAYER CONTINUES TAKEN	0
2 PLAYER CONTINUES TAKEN	0
BURN-IN LOOPS SUCCESSFULLY COMPLETED	0
<b>NEXT AUDIT PAGE</b>	
<b>RETURN TO MAIN MENU</b>	

PAGE 1 OF AUDIT TABLE

KUNG LAO CHOSEN	0
LIU KANG CHOSEN	0
CAGE CHOSEN	0
BARAKA CHOSEN	0
KITATA CHOSEN	0
MILEENA CHOSEN	0
SHANG TSUNG CHOSEN	0
RAIDEN CHOSEN	0
SUB-ZERO CHOSEN	0
REPTILE CHOSEN	0
SCORPION CHOSEN	0
JAX CHOSEN	0
<b>PREVIOUS AUDIT PAGE</b>	
<b>RETURN TO MAIN MENU</b>	

PAGE 2 OF AUDIT TABLE

To exit the Game Audit Table, move any joystick to select RETURN TO MAIN MENU, then press any control panel button to activate your selection.


## GAME ADJUSTMENTS

Move any joystick to select the Game Adjustment option on the Main Menu, then press any control panel button to activate it.

The Game Adjustments Menu allows the owner/operator to change the Game Pricing and Game Difficulty.

The Game Adjustments Menu offers several options. Each option has several choices. Move any joystick to select an option, then press any control panel button to activate that option. The next menu screen provides a setting choice. Move any joystick to modify the setting value, then press any control panel button to lock in the new value and return to the Adjustment Menu. Move the joystick up to increase the setting value, move the joystick down decrease the setting value.

To exit the Adjustments Menu, use any joystick to select RETURN TO MAIN MENU, then use any control panel button to activate your selection.

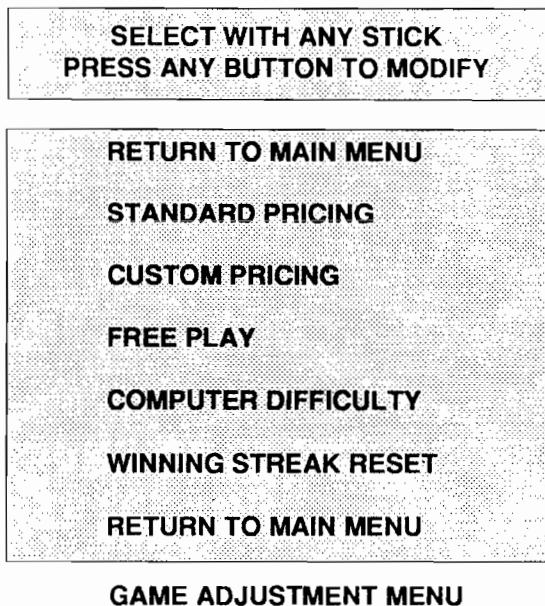

### Note

Game Adjustments are explained in more detail on the following page.

Adjustment values set by DIP Switch, override adjustment values set by the menu system.

## **Game Adjustments**

### **Standard Pricing**

Standard Pricing allows the operator to choose any of the "Standard" selections for the Standard Pricing Table. See page 1-19.

Modify the setting value with any joystick. Press any control panel button to lock in the new value and return to the Adjustment Menu.

### **Custom Pricing**

Custom Pricing allows the operator to install pricing other than that of the Standard Pricing Table. Custom Pricing also allows the operator to select the maximum amount of credits per game, the amount of credits required to start a game, and the amount of credits required to continue a game. This option is being adjusted from the Dip Switch Settings. In order to use custom pricing, switch #1 of DIP Switch Bank #2 must be set to on. See page 1-20.

Modify the setting value with any joystick. Press any control panel button to lock in a new value and return to the Adjustment Menu.

### **Free Play**

This option selects free play. The setting choices for this adjustment are:

- No (factory)
- Yes

### **Computer Difficulty**

This option determines the difficulty level of game play. The setting choices for this adjustment are:

- 1 (Extra Easy)
- 2 (Easy)
- 3 (Medium; factory)
- 4 (Hard)
- 5 (Extra Hard)

### **Winning Streak Reset**

This option resets the highest scores after a selected amount of games are played. The setting choices for this adjustment are:


- Reset every 5,000 games.
- Reset every 10,000 games (factory).
- Reset every 15,000 games.
- Do Not Reset.

## Standard Pricing Table

Name	Settings Credit/Coin	Left Chute	Center Chute	Right Chute	Fourth Chute
USA 1	1/25¢ (2 to Start; 2 to Continue)	25¢	\$1.00	25¢	
USA 2	1/25¢ (2 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 3	1/25¢ (1 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 4	1/50¢, 3/\$1.00 (1 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 5	1/50¢, 4/\$1.00 (2 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 6	1/50¢ (1 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 7	1/50¢, 3/\$1.00 (1 to Start; 1 to Continue)	25¢	\$1.00	25¢	
USA 8	1/50¢, 4/\$1.00 (2 to Start; 2 to Continue)	25¢	\$1.00	25¢	
USA ECA	1/25¢, 4/\$1.00 (2 to Start; 2 to Continue)	\$1.00	10¢	25\$	5¢
German 1	1/1DM, 6/5DM	1DM		5DM	
German 2	1/1DM, 7/5DM	1DM		5DM	
German 3	1/1DM, 8/5DM	1DM		5DM	
German 4	1/1DM, 5/5DM	1DM		5DM	
German 5	1/1DM, 6/5DM	1DM		5DM	
German ECA	1/1DM, 2/2DM, 6/5DM	5DM	1DM	2DM	
France 1	2/5F, 5/10F	5F		10F	
France 2	2/5F, 4/10F	5F		10F	
France 3	1/5F, 3/10F	5F		10F	
France 4	1/5F, 2/10F	5F		10F	
France 5	2/5F, 5/10F, 11/2 x 10F	5F		10F	
France 6	2/5F, 4/10F, 9/2 x 10F	5F		10F	
France 7	1/5F, 3/10F, 7/2 x 10F	5F		10F	
France 8	1/5F, 2/10F, 5/2 x 10F	5F		10F	
France 9	1/3 x 1F, 2/5F	1F		5F	
France 10	1/2 x 1F, 3/5F	1F		5F	
France 11	1/3 x 1F, 2/5F, 5/2 x 5F	1F		5F	
France 12	1/2 x 1F, 3/5F, 7/2 x 5F	1F		5F	
France ECA	1/3 X 1F, 2/5F, 5/2 X 5F	1F	10F	5F	
Canada	1/2 x 25¢, 3/\$1.00	25¢		\$1.00	
Swiss 1	1/1F, 6/5F	1F		5F	
Swiss 2	1/1F, 7/5F	1F		5F	
Swiss 3	1/1F, 8/5F	1F		5F	
Italy	1/500 lire	500 lire		500 lire	
UK 1	1/20P, 3/50P	20P		50P	
UK 2	2/20P, 5/50P	20P		50P	
UK ECA	1/20P, 3/50 P, 7/£1.00	£1.00		50P	
UK Elec w/CCU	1/30P, 2/50P, 4/£1.00	£1.00	20P	CCU	10P
Spain 1	1/100 peseta, 6/500 peseta	100 peseta		500 peseta	
Spain 2	1/100 peseta, 5/500 peseta	100 peseta		500 peseta	
Australia 1	1/3 x 20¢, 2/\$1.00	20¢		\$1.00	
Australia 2	1/5 x 20¢, 1/\$1.00	20¢		\$1.00	
Japan 1	1/100 yen	100 yen		100 yen	
Japan 2	2/100 yen	100 yen		100 yen	
Austria 1	1/5 schilling, 2/10 schilling	5 schilling		10 schilling	
Austria 2	1/2 x 5 schilling, 3/2 x 10 schilling	5 schilling		10 schilling	
Belgium 1	1/20F	20F		20F	
Belgium 2	3/20F	20F		20F	
Belgium 3	2/20F	20F		20F	
Belgium ECA	1/20F	50F	5F	20F	
Sweden	1/3 x 1 krona, 2/5 krona	1 krona		5 krona	
New Zealand 1	1/3 x 20¢	20¢		20¢	
New Zealand 2	1/2 x 20¢	20¢		20¢	
Netherlands	1/1HFI, 3/2.5HFI	1HFI		2.5HFI	
Finland	1/1 markka	1 markka		1 markka	
Norway	1/2 x 1 krone, 3/5 x 1 krone	1 krone		1 krone	
Denmark	1/2 x 1 krone, 3/5 krone, 7/2 x 5 krone	1 krone		5 krone	
Antilles	1/25¢, 4/1 guilder	25¢		1 guilder	
Hungary	1/2 x 10 forint, 3/2 x 20 forint	10 forint		20 forint	

If option desired is not shown above, use Custom pricing.

## Custom Pricing

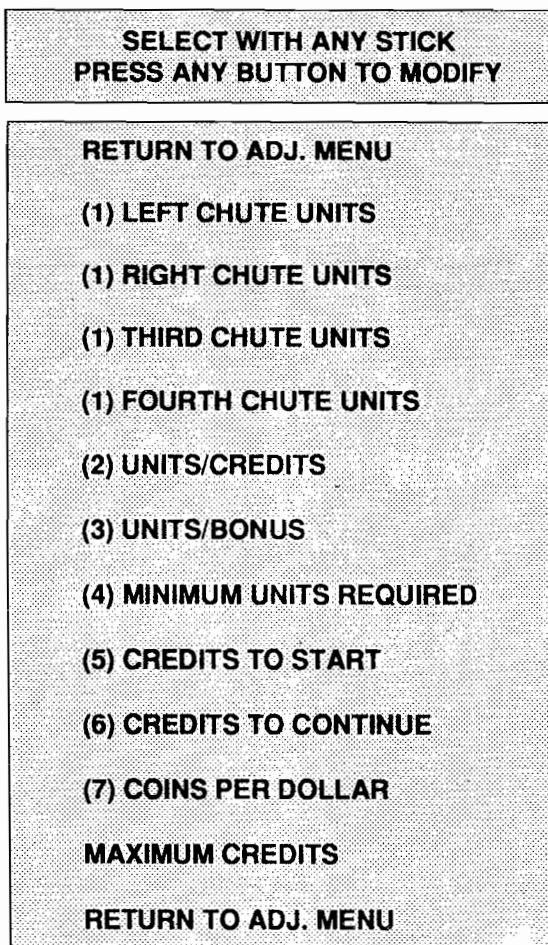


- (1) Coins inserted accumulate units. This adjustment specifies the number of units given for each coin in the fourth chute (see "units/credit").
- (2) This is the number of coin units required to buy one credit.
- (3) One bonus credit is awarded after this many coin units have accumulated.
- (4) No credits will be awarded until this many coin units have accumulated.
- (5) Each player needs this many credits to begin a game.
- (6) Each player needs this many credits to continue a game.
- (7) The detailed bookkeeping screen shows total collections based on this many coins per dollar. (Set to zero to disable the display of money totals.)
- (8) This is the limit for the credits counter. Additional coins inserted will be lost (factory setting: 30).

## **UTILITIES**

Move any joystick to select the Utilities option on the Main Menu, then press any control panel button to activate it.

The Utilities Menu allows the owner/operator to clear the game's bookkeeping memory and to install a custom message.

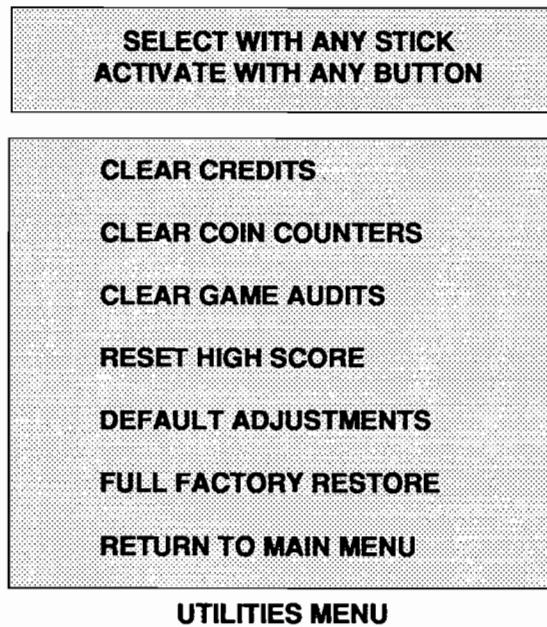

Move any joystick to select an item from the Utilities Menu, then press any control panel button to activate that item. After an item has been activated, you are given the option of resetting it or not.

For example:



Move any joystick to choose YES or NO, then press any control panel button to lock in your choice and to return to the Utilities Menu.


To exit the Utilities Menu, move any joystick to select RETURN TO MAIN MENU, then press any control panel button to activate your selection.

## **VOLUME ADJUST**

Move any joystick to select the Volume Adjust option on the Main Menu, then press any control panel button to activate it.

The Volume Adjust allows the operator to control the audio level of the game.

Use any joystick, or the volume buttons, to adjust the volume to the desired level. The scale on the screen shows the volume level.

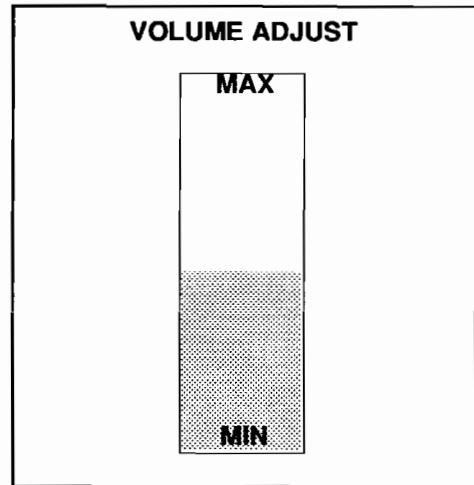

Press any button to return to the Main Menu.

---

## Troubleshooting

### Problem

No Picture or Distorted Picture.

Turn game On and nothing happens.

No sound.

No General Illumination.

Move joystick and the screen player does not move.

Press Start Button and nothing happens.

Press any control panel button and screen player does not move.

No credit given when coins are inserted.

Too many credits for number of coins inserted.

Game stays in test mode.

### Possible Solution

Check for faulty video board or monitor. Check for disconnected video signal cable.

Check line fuse. Check for +5Vdc at pins C, D, 3, and 4 of the JAMMA Connector.

Check the speaker and speaker connection to pins L and 10 on the JAMMA Connector. Check volume control setting. Check for +12V dc at pins F and 6 on the JAMMA Connector. Check interboard wiring from CPU Board to the Sound Board. Also, check for -5V.

Check the 1A., S.B. fuse.

Check for open wires between the joystick and CPU Board. Check for contamination on joystick switch contacts and CPU Board pins. Check for proper ground.

Check for open wires between the button and CPU Board. Check for contamination on CPU Board pins or the button switch blade contacts. Check for proper ground.

Check for open wires between the button and CPU Board. Check for contamination on CPU Board pins or the button switch blade contacts. Check for proper ground.

Check DIP switch coin setting. Check for contamination on coin switch contacts. Check for an open wire between Coin Switch 1 and pin 16 on the JAMMA Connector or Coin Switch 2 and pin T of the JAMMA Connector.

Check Game Pricing setting. Check for a short between pins T & 16 on the JAMMA Connector.

Check that the test switch on the DIP Switch is set to Off.

**NOTES**

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

# MORTAL KOMBAT II

S E C T I O N  
two

---



Parts

---

## Cabinet Hardware

Rear Door Assembly	A-16472-1
Lock Retainer Plate	01-7264
Upper Door Lock Cam	01-8989
Lock Plate	01-11285
Door Bracket	01-11291
20" Vent Hole Cover	03-7602
Door Cam Lock	20-6542-TB
 Cabinet Assembly	A-16971-40029
Leg Leveler Plate	01-9155
Shaft Caster	02-4404
Leg Adjuster, 3.0"	08-7377
Caster Wheel	20-9627
Power Switch Plate Assembly	A-15924
Power Switch	5640-13250-00
 Bezel & Instruction Card Set	A-17454-1
25" CRT Bezel	03-8497
Instruction Card	31-1834
 Coin Door Assembly	09-50000-33
Bill Validator Cable	H-17438-2
Coin Meter with Diode	5580-13476-00
 Glass Retainer Bracket	01-9607
20" Vent Hole Cover	03-7602
Lamp Lock	03-8327
Glass Edge Channel	03-8358
Clear Glass	08-7456-4
Clear Glass	08-7456-10
TAG Special Wrench	16-9074
Toggle Latch	20-9347
Long Arm Key T-20	20-9620
#555 Bulb, 6.3V	24-8768
Marquee	31-1830
Marquee Retainer	03-8252-2

---

## PC Boards

Always Replace PC Boards Exactly As Shown On Page 3-38.

Electronic Rack	A-17296-2
Power Supply	A-15202-1
T-Unit 2 CPU w/ Memory Expansion	A-17266-40029
DCS Sound Board	A-17319-40029

---

## **Control Panel**

Housing & Control Panel Assembly	A-17293-2
Control Panel Assembly	A-17294-40029
Plate	A-17430
Control Panel Cable	H-17295-2
Security Latch Bracket	01-11955
Con. Panel Latch Brkt.	01-11996
Clear Overlay	03-9011
Red Pushbutton	20-9687-1
White Pushbutton	20-9687-2
Blue Pushbutton	20-9687-3
8-way Joystick	20-9694-1
Screened Overlay	31-1828
Housing w/hinge	A-17429-40029
Toggle Latch	20-9347

---

## **Fluorescent Lamp Assembly**

Fluorescent Housing & Bracket	A-15890
Fluorescent Lamp Cable	H-16303
Starter	20-8748-1
Ballast	20-8749-8
Lamp Holders	20-9788
Starter Socket	20-9789
18" Fluorescent Bulb, 15W	24-8809

---

## **Speakers**

Speaker & Cap Assembly	A-14968
Speaker Cable	H-17352
Piezo Speaker Cable	H-17433
Speaker Grille	01-11859
Cap. 10 $\mu$ f, non-pol, 50V,20%	5045-12914-00
Tweeter Speaker, 4 $\Omega$ , 15W	5555-12924-00
6" Speaker, 4 $\Omega$ , 25W	5555-12929-00

---

## **Transformer Assembly**

Power Pack Assembly	A-15916
Power Pack Chassis Assy	A-15915
Line Cord Assembly	A-15921
Power Pack Jumper Cable	H-13265
Transformer Jumper Cable	H-13378
Line Filter Jumper Cable	H-15922
G.I. Jumper Cable	H-15945
Varistor, 130V, 10J	5017-09044-00
Line Filter, 5 Amp	5102-10310-00
Power Transformer	5610-13326-00
Fuse, SB, 1A, 250V	5731-06569-00
Fuse, SB, 3A, 250V	5731-10356-00
Fuse Holder, Panel	5733-12869-00

---

## **Cables**

Power Pack Jumper	H-13265
Transformer Jumper	H-13378
AC "Y" Cable	H-14004
Switch Power Cable	H-15203
Line Filter Jumper Cable	H-15922
G.I. Jumper Cable	H-15945
Fluorescent Lamp Cable	H-16303
Dixie Narco Cable	H-17019
Control Panel Cable	H-17295-2
Main Harness Cable	H-17297-2
Speaker Cable	H-17352
Piezo Cable	H-17433
Bill Validator Cable	H-17438-2
Sound Power Speaker Cable	H-17442-2
Line Voltage Cable	H-17507-2
20-pin Ribbon Cable	5795-10937-18

---

## **Monitor**

Monitor Support Bracket	01-10819
25" Monitor	5675-12787-04



---

## **Manuals**


Instruction Manual	16-40029-101
DBV Installation Instructions	16-9637

**A-15202-1**  
**Power Supply Switcher Assembly**

Part Number	Description
H-15203	Switch Power Cable
01-10500	Mounting Bracket
01-10573	Shield
20-9920	P/S Switcher Supply

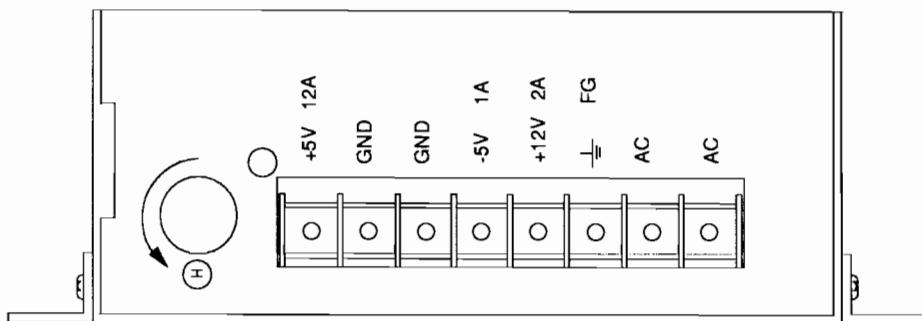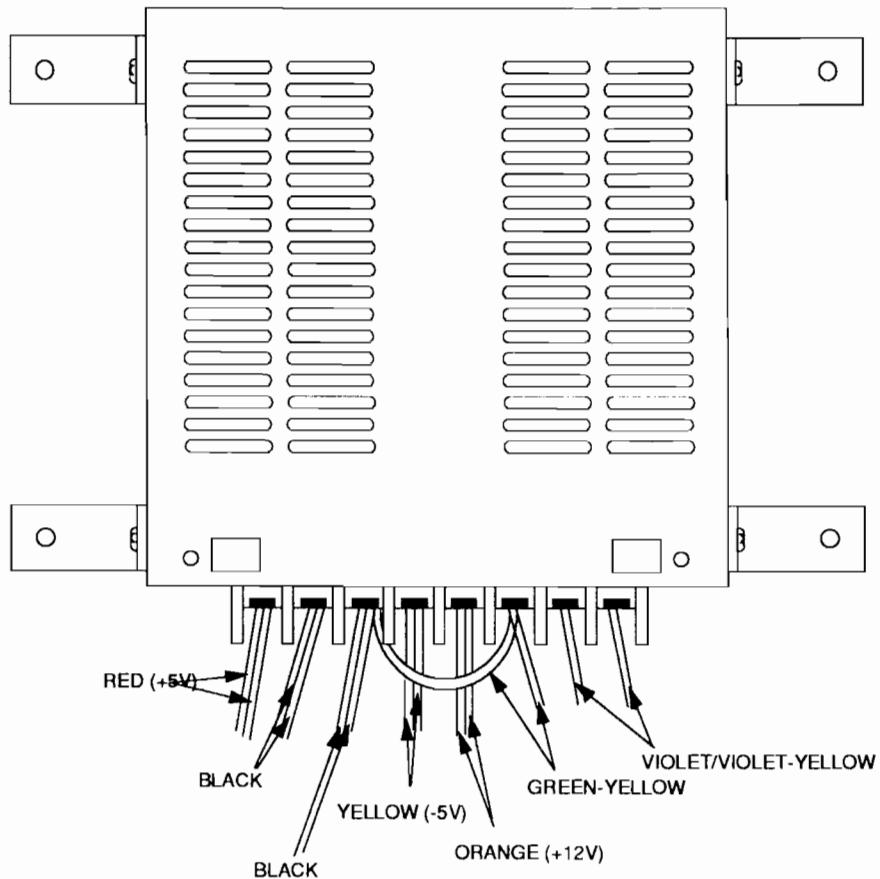

**A-17265-40029**  
**CPU Board Assembly**

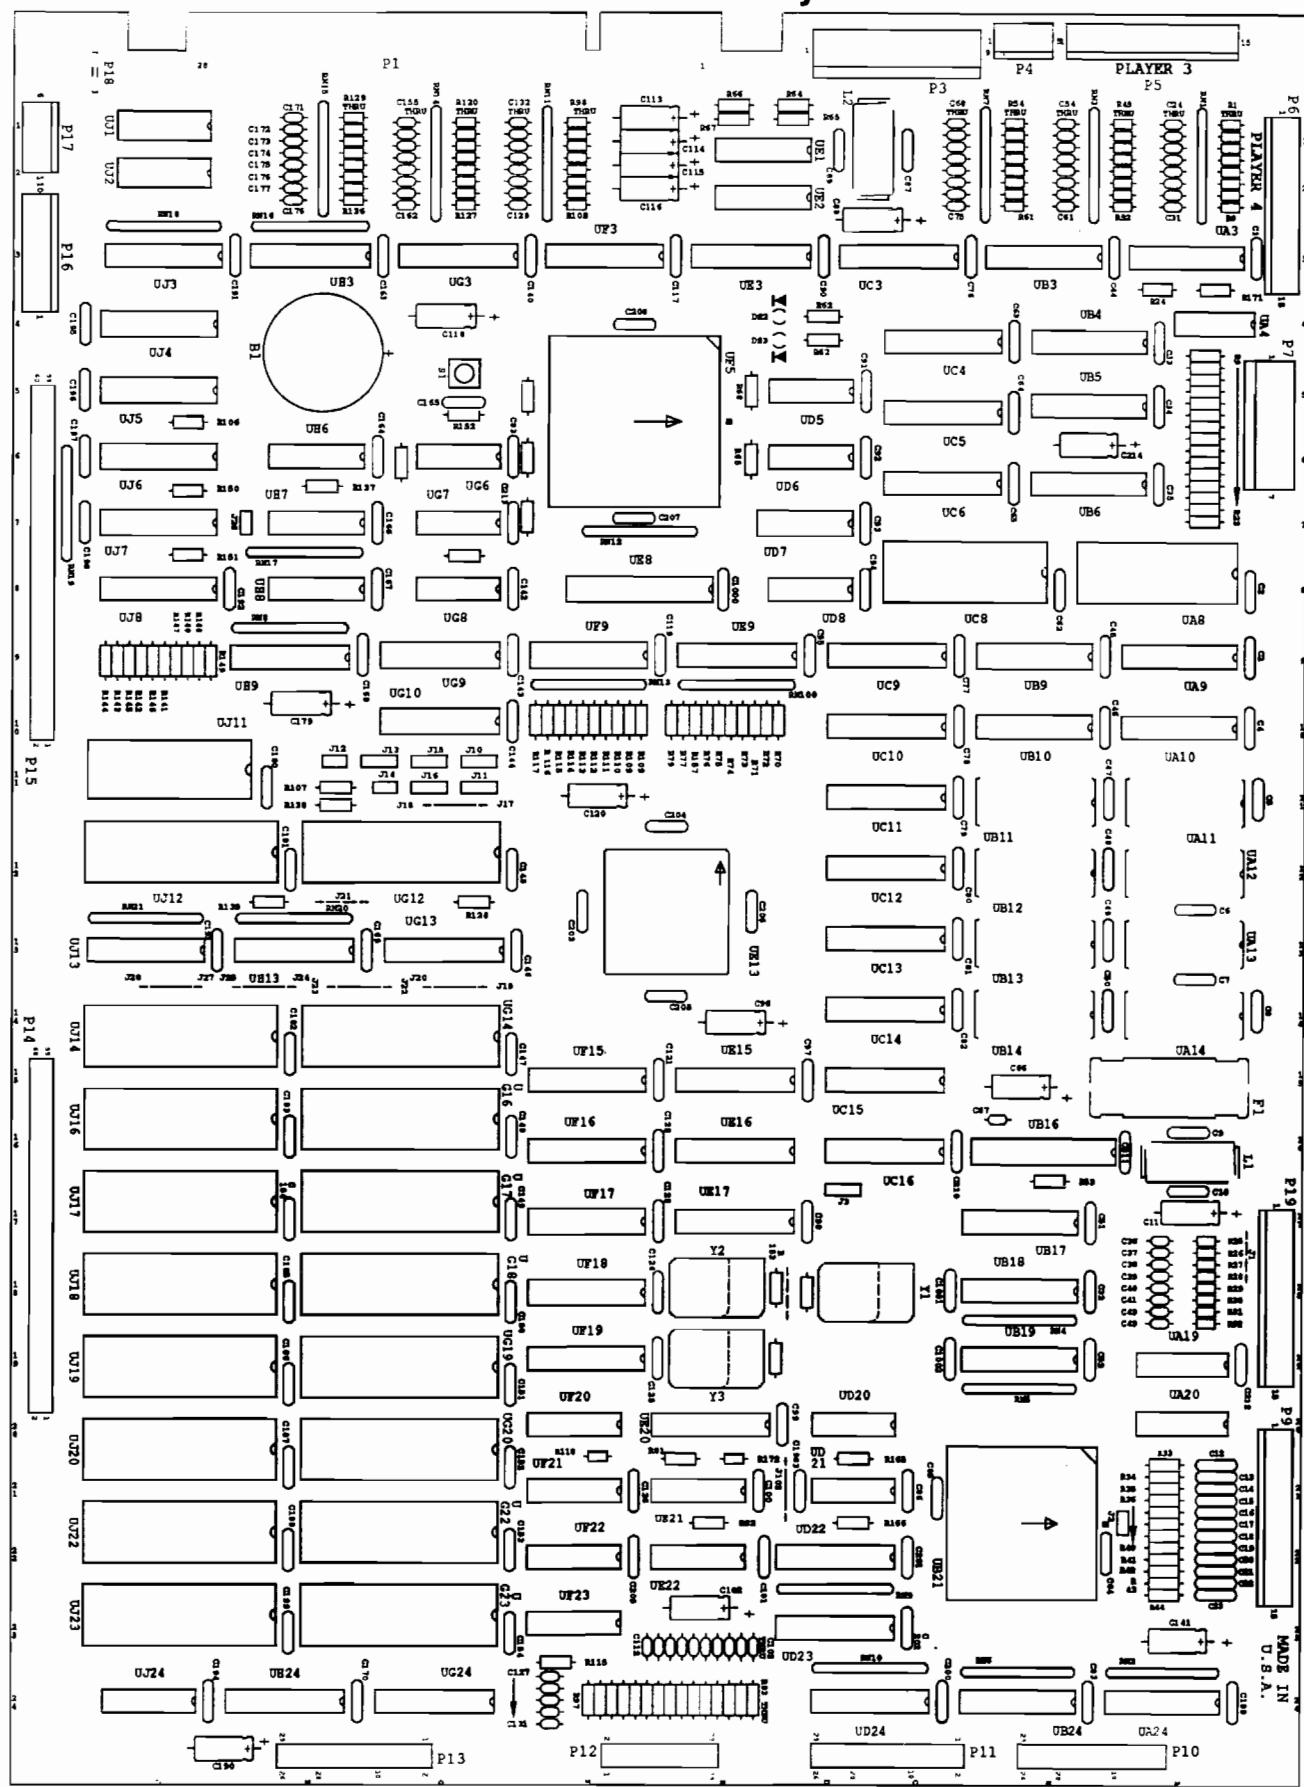


# A-17265-40029

## CPU Board Parts

Part Number	Part Designator	Description	Part Number	Part Designator	Description
5434-12255-00	UH6	IC, MAX691	5043-08980-00	C1-C4, C9, C10, C32-	.01uF Cap.,
5370-12602-00	UE1	IC, ULN2064		C35, C44-C46, C51-C53,	
5340-12958-00	UE22, UF22, UF23	IC, 26LS31		C62-C65, C76-C86, C90-	
5340-12959-00	UE21, UF20, UF21	IC, 26LS32A		C95, C97-C101, C117,	
5340-13020-00	UJ4, UJ5, UJ6, UJ7	IC, 44C256		C119, C121-C126, C140,	
5340-12558-00	UJ11	IC, 5565		C142-C154, C163, C164,	
5340-13322-00	UA8, UC8	IC, 5C2568		C166-C170, C180-C189,	
5283-10551-00	UG8	IC, 74F00		C191-C194, C199-C213,	
5283-10552-00	UD6	IC, 74F04		C200	
5281-09215-00	UD8	IC, 74LS04	5043-08996-00	C5-C8, C47-C50, C195-	.1uF Cap., 20%
5280-09309-00	UA4	IC, 7407		C198, C1001-C1003	
5283-12488-00	UG6	IC, 74F08	5040-09343-00	C11, C66, C88, C96,	10uF Cap., 20V
5281-09500-00	UD20	IC, 74LS32		C102, C115, C116,	
5321-13466-00	UD21	IC, 74AC74		C118, C120, C141,	
5281-09737-00	UD5	IC, 74LS86		C179, C190, C214	
5281-09745-00	UH8	IC, 74LS138	5671-13732-00	DS2, DS3	LED, Red
5281-13438-00	UH7	IC, 74LS155A	5551-09822-00	L2	4.7uH Coil, 3.0A
5281-09733-00	UE2	IC, 74LS174	5880-11056-00	B1	Battery, Lithium 3.0V
5320-13437-00	UD22	IC, 74ACTQ244	5881-12315-00	B1	Battery Holder
5283-12890-00	UB24, UD23	IC, 74F244	5700-09915-00	UF17	20-pin Socket
5281-09867-00	UG9	IC, 74LS244	5700-12047-00	UE8	24-pin Socket
5320-13436-00	UB18, UB19	IC, 74ACTQ245	5700-12088-00	UG12, UG14, UG16-UG20,	32-pin Socket
5317-12208-00	UB6, UC6, UC11, UC12, UC13, UC14, UE15, UE16, UF15, UF16, UH9, UH13, UJ8, UJ13	IC, 74ALS245		UG22, UG23, UJ12, UJ14, UJ16-UJ20, UJ22, UJ23	
5283-12889-00	UA24, UD24	IC, 74F245	5700-12253-00	UB21	68-pin Socket
5283-13319-00	UD7	IC, 74F253	5700-12424-00	UF5	84-pin Socket
5283-13320-00	UB9, UF9, UF18, UG10	IC, 74F373	5791-12461-05	P4	5-pin Header
5281-09486-00	UA9, UA10, UB5, UB10, UC5, UC9, UC10, UC15, UC16, UE17, UE20, UF19, UG13	IC, 74LS374	5791-12461-06	P17	6-pin Header
5317-12211-00	UB4, UC4	IC, 74ALS541	5791-12461-10	P16	10-pin Header
5315-13435-00	UA3, UB3, UC3, UE3, UF3, UG3	IC, 74HCT541	5791-12461-15	P5	15-pin Header
5281-12887-00	UE9, UH3, UJ3	74LS541	5791-10862-07	P7	7-pin Header
5521-13424-03	UE19	8MHz Oscillator	5791-10862-09	P3	9-pin Header
5521-13424-01	UD18	50MHz Oscillator	5791-09437-00	P12	20-pin Header
5645-09025-00	SW1, SW2	DIP, 8-switch	5019-09669-00	RN4, RN5, RN13	1K Ω Res. 5%, 1/8W
5010-13364-00	R70-R77, R79, R106, R108-R117, R140-R147, R149, R150	33 Ω Res. 5%, 1/8W	5010-13472-00	J100, J101	47 Ω Res. 5%, 1/8W
5010-13363-00	R24, R69, R82-R97, R119, R128, R137, R148, R151, R171	100 Ω Res. 5%, 1/8W	5010-13473-00	R155	39 Ω Res. 5%, 1/8W
5010-13372-00	R81	220 Ω Res. 5%, 1/8W	5010-13474-00	R158, R167-R170	68 Ω Res. 5%, 1/8W
5010-13371-00	R62, R63, R66, R67	330 Ω Res. 5%, 1/8W	5641-12551-00	S1	Sw-Push Button
5010-13366-00	R45-R51, R54, R57, R58, R98-R105, R118, R120-R127, R129-R136, R172	470 Ω Res. 5%, 1/8W	5283-12489-00	UG7	IC, 74F32
5010-13361-00	R13, R14, R19	1K Ω Res. 2%, 1/8W	5796-13836-00	P14, P15	60-pin Connector
5010-13362-00	R12, R15, R20	2K Ω Res. 2%, 1/8W	5010-09534-00	J18, J19, J22, J24, J28, R154	0 Ω Res. Jumper
5010-13368-00	R11, R16, R21	3.9K Ω Res. 5%, 1/8W	5400-12220-00	UB21	IC, TMS34010-50
5010-13365-00	R53, R107, R138, R139, R152, R157, R165, R166	4.7K Ω Res. 5%, 1/8W	A-16217	UE8	IC, 20L8
5010-13369-00	R10, R17, R22	8.2K Ω Res. 5%, 1/8W	5410-13816-00	UF5	IC, 1020A-1
5010-13370-00	R9, R18, R23	15K Ω Res. 5%, 1/8W	A-17480	UF17	IC, 16L8
5019-09362-00	RN1-RN3, RN6, RN7, RN9-RN12, RN14-RN18, RN100	4.7K Ω Res. SIP, 5%, 1/8W	A-5343-40029-18	UG12	EPROM
5048-11030-00	C165	470pF Cap., 10%	A-5343-40029-1	UG14	EPROM
5048-13375-00	C54-C60, C67, C68 C71, C72, C103-C112, C127-C139, C155-C162, C171-C178	100pF Cap., 10%	A-5343-40029-5	UG16	EPROM
5048-11031-00	C87, C89	.001uF Cap., 10%	A-5343-40029-9	UG17	EPROM
			A-5343-40029-13	UG18	EPROM
			A-5343-40029-3	UG19	EPROM
			A-5343-40029-7	UG20	EPROM
			A-5343-40029-11	UG22	EPROM
			A-5343-40029-15	UG23	EPROM
			A-5343-40029-17	UJ12	EPROM
			A-5343-40029-2	UJ14	EPROM
			A-5343-40029-6	UJ16	EPROM
			A-5343-40029-10	UJ17	EPROM
			A-5343-40029-14	UJ18	EPROM
			A-5343-40029-4	UJ19	EPROM
			A-5343-40029-8	UJ20	EPROM
			A-5343-40029-12	UJ22	EPROM
			A-5343-40029-16	UJ23	EPROM
			5410-12862-00	UE13	IC, DMA2
			5340-13321-00	UA11-UA14, UB11-UB14	IC, 48121, 80nsec

Notes: 1. See Section 3 For Schematic; .2 \* = Not for individual sale.

**A-17264-40029**  
**Memory Expansion Board Assembly**

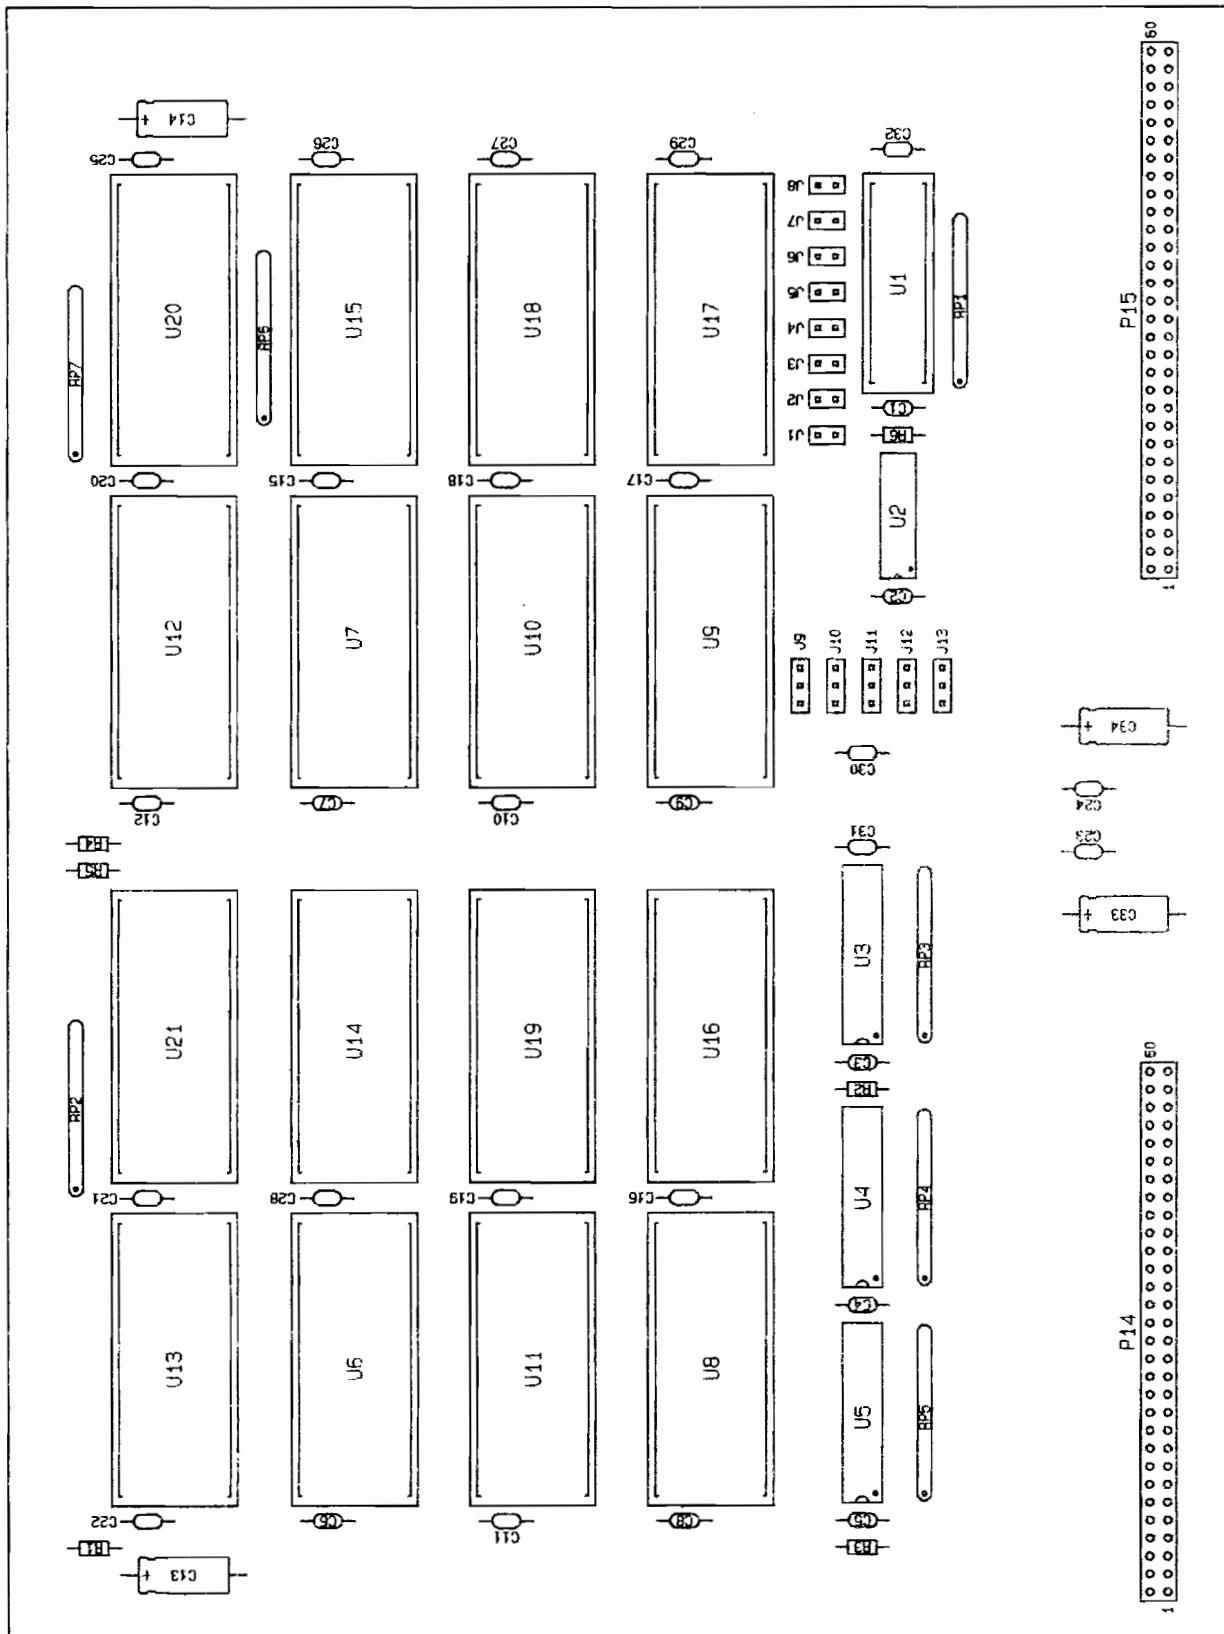


## **A-17264-40029**

### **Memory Expansion Board Parts**

<b>Part Number</b>	<b>Part Designator</b>	<b>Description</b>
5043-08980-00	C1-C12, C15-C32	01µf Cap. 50V
5040-09343-00	C13, C14, C33, C34	10µf Cap. 16V
5010-13365-00	R1, R6	4.7KΩ Res. 1/8W, 5%
5010-13363-00	R2-R5	100Ω Res. 1/8W, 5%
5019-09367-00	RP3-RP7	4.7Ω SIP Res. 9R, 10 pin
5320-13437-00	U3-U5	IC, 74ACTQ244
5700-12088-00	U6-U21	32-pin Socket, .600
5796-13837-00	P14, P15	60-pin Connector Header
A-5343-40029-19	U8	EPROM
A-5343-40029-20	U9	EPROM
A-5343-40029-21	U6	EPROM
A-5343-40029-22	U7	EPROM
A-5343-40029-23	U11	EPROM
A-5343-40029-24	U10	EPROM
A-5343-40029-25	U13	EPROM
A-5343-40029-26	U12	EPROM

**A-17319-40029**  
**Sound Board Assembly**

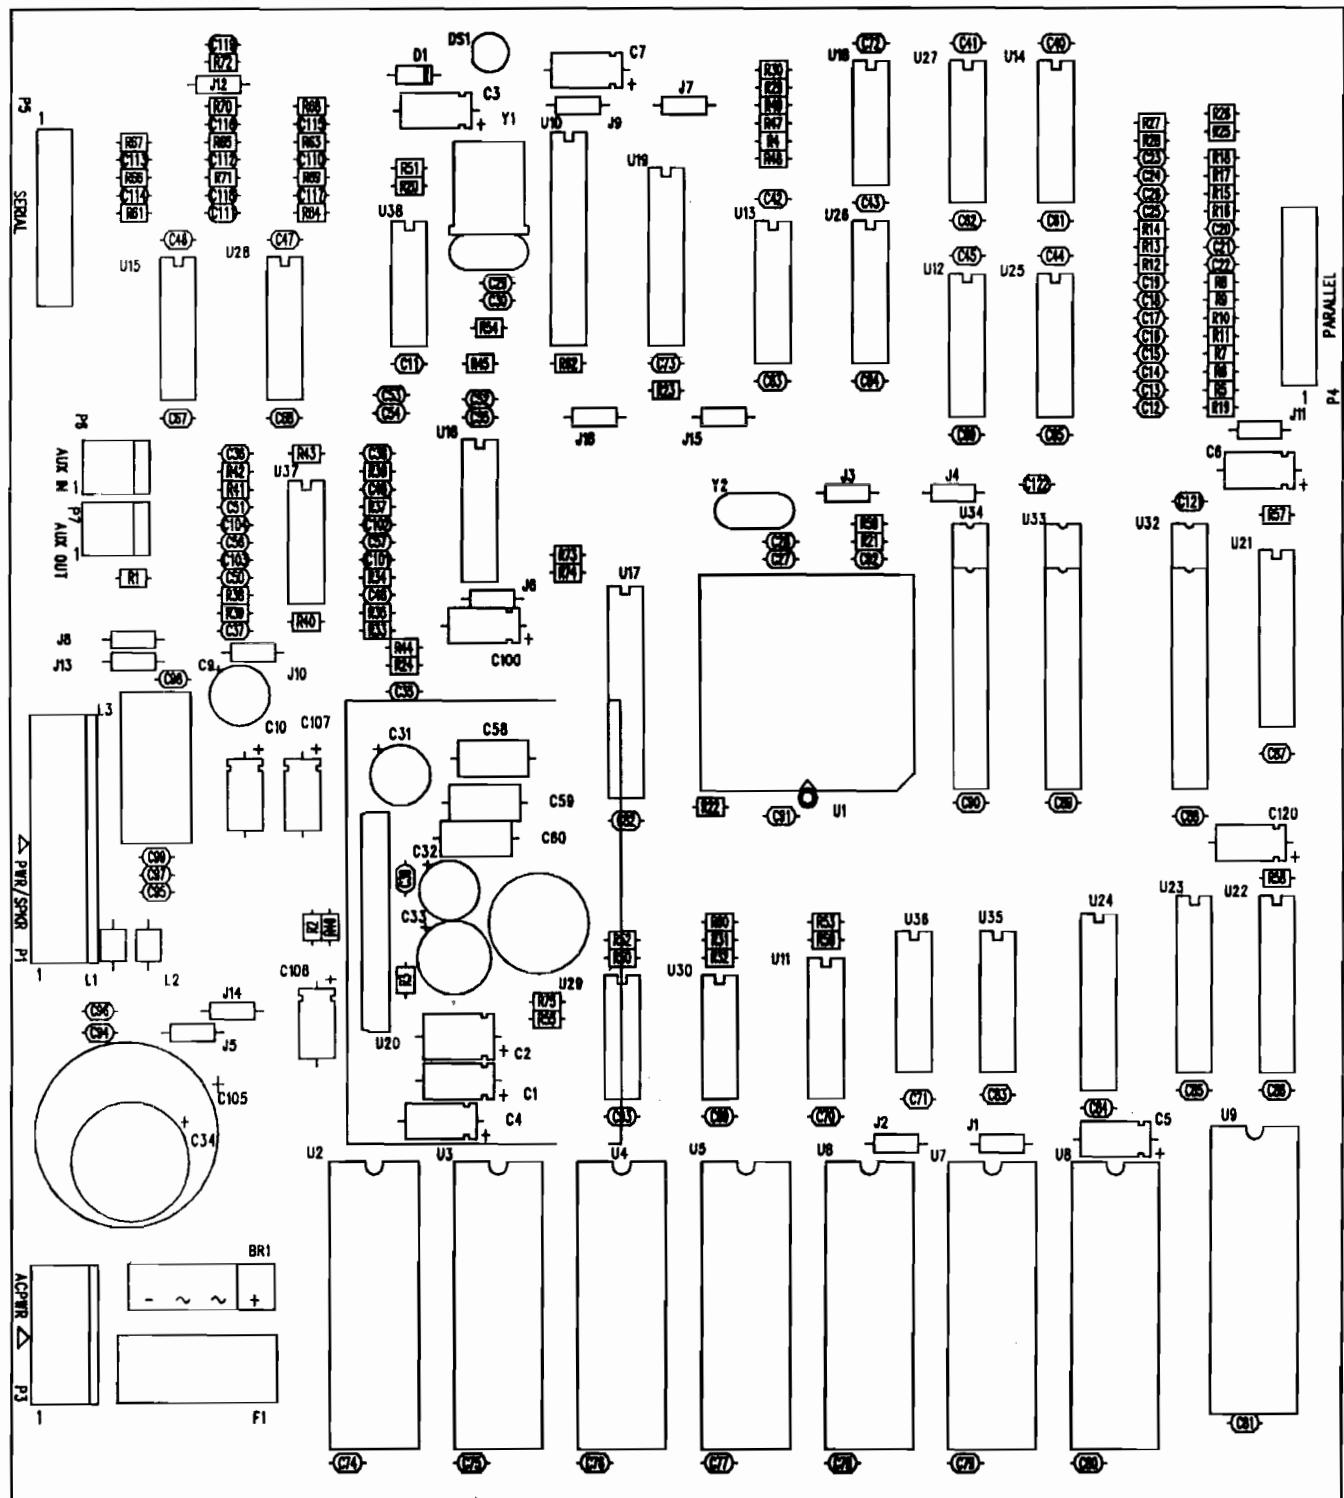

**A-17319-40029**  
**Sound Board Parts**

Part Number	Part Designator	Description	Part Number	Part Designator	Description
20-9915	J5, J8, J10, J13	Wire Insulated Jumper	5280-08974-00	U29	IC, 7406
5010-09534-00	J1, J4, J6, J7, J15	0Ω Res., 1/4W	5281-09486-00	U19	IC, 74LS374
5010-13363-00	R45, R48, R49, R51,	100Ω Res., 5%	5281-09487-00	U18	IC, 74LS74
	R57-R60		5283-10551-00	U30	IC, 74F00
5010-13365-00	R21-R23, R25-R29,	4.7KΩ Res., 5%	5311-10948-00	U11	IC, 74HC138
	R31, R32, R50, R53,		5311-12043-00	U35, U36	IC, 74HC174
	R55, R56, R73-R75		5311-12287-00	U21-U23	IC, 74HC541
5010-13366-00	R4	470Ω Res., 5%	5311-12538-00	U38	IC, 74HC14
5010-13371-00	R52	330Ω Res., 5%	5320-13436-00	U24	IC, 74ACTQ245
5010-13372-00	R47	220Ω Res., 5%	5340-12958-00	U25-U27	IC, 26LS31
5010-13472-00	R5-R19	47Ω Res., 5%	5340-12959-00	U12-U14	IC, 26LS32A
5010-13361-00	R1	1KΩ Res., 1/8W, 2%	5340-13304-00	U32-U34	IC, SRAM, 2Kx8
5013-13842-00	R33-R44	6.19KΩ Res., 1%	5370-12730-00	U37	IC, TL084
5010-13841-00	R24	47KΩ Res., 5%, 200V	5370-13308-00	U20	IC, MB3731 SIP
5010-13844-00	R3, R20	100KΩ Res., 5%, 200V	5371-13299-00	U16	IC, AD1851
5010-13858-00	R2	820Ω Res., 1/8W, 5%	5520-13301-00	Y2	10MHz Crystal
5010-13370-00	R46	15KΩ Res., 1/8W, 5%	5551-09822-00	L3	4.7μH Inductor
5040-09332-00	C2	47μf Cap., ±20%, Axial	5556-12513-00	L1, L2	Ferrite Bead
5040-09343-00	C1, C2, C4-C7, C10, C100, C106, C107, C120	10μf Cap., ±20%, Axial	5671-13732-00	DS1	Display LED, Red
5043-08980-00	C39-C45	.01μf Cap., +80%/-20%, Axial	5700-12088-00	U2-U9	32-pin Socket
5043-08996-00	C3, C52-C57, C61-C61, C69-C99, C121, C122	.1μf Cap., ±20%, Axial	5700-12253-00	U1	68-pin Socket
	C58-C60	.1μf Cap., ±10%, Axial Film	5700-12047-00	U17	24-pin Socket
5045-12926-00	C27, C28	22pf Cap., ±20%, Axial	5791-09437-00	P4	100 C 10 x 2
5048-11028-00	C11-C26	100pf Cap., ±20%, Axial	5791-10862-02	P6, P7	2H Str Sq Pin .156
5048-13375-00	C51	6800pf Cap., 5%, Axial	5791-10862-05	P3	5H Str Sq Pin .156
5048-13608-00	C48-C50	3900pf Cap., 5%, Axial	5791-10862-09	P1	9H Str Sq Pin .156
5048-13609-00	C35-C38	1000pf Cap., ±20%, Axial	5400-13298-00	U1	IC, ADSP2105 PLCC
5048-13610-00	C101-C104	680pf Cap., ±20%, Axial	A-17481	U17	IC, PLD GAL20V8, 25ns
5048-13611-00	D5	Diode, 1N4148	A-5343-40029-35	U2	EPROM
5070-08919-00		Heat Sink	A-5343-40029-36	U3	EPROM
01-10516			A-5343-40029-37	U4	EPROM
			A-5343-40029-38	U5	EPROM
			A-5343-40029-39	U6	EPROM
			A-5343-40029-40	U7	EPROM

## **NOTES**

# MORTAL KOMBAT II

S E C T I O N  
three

---


---

Schematics and Wiring Diagrams




# Cabinet Wiring Diagram

NOTE: Red line on ribbon cable must go to pin 1 on both boards. Ribbon cable may need to be twisted to accomplish this.

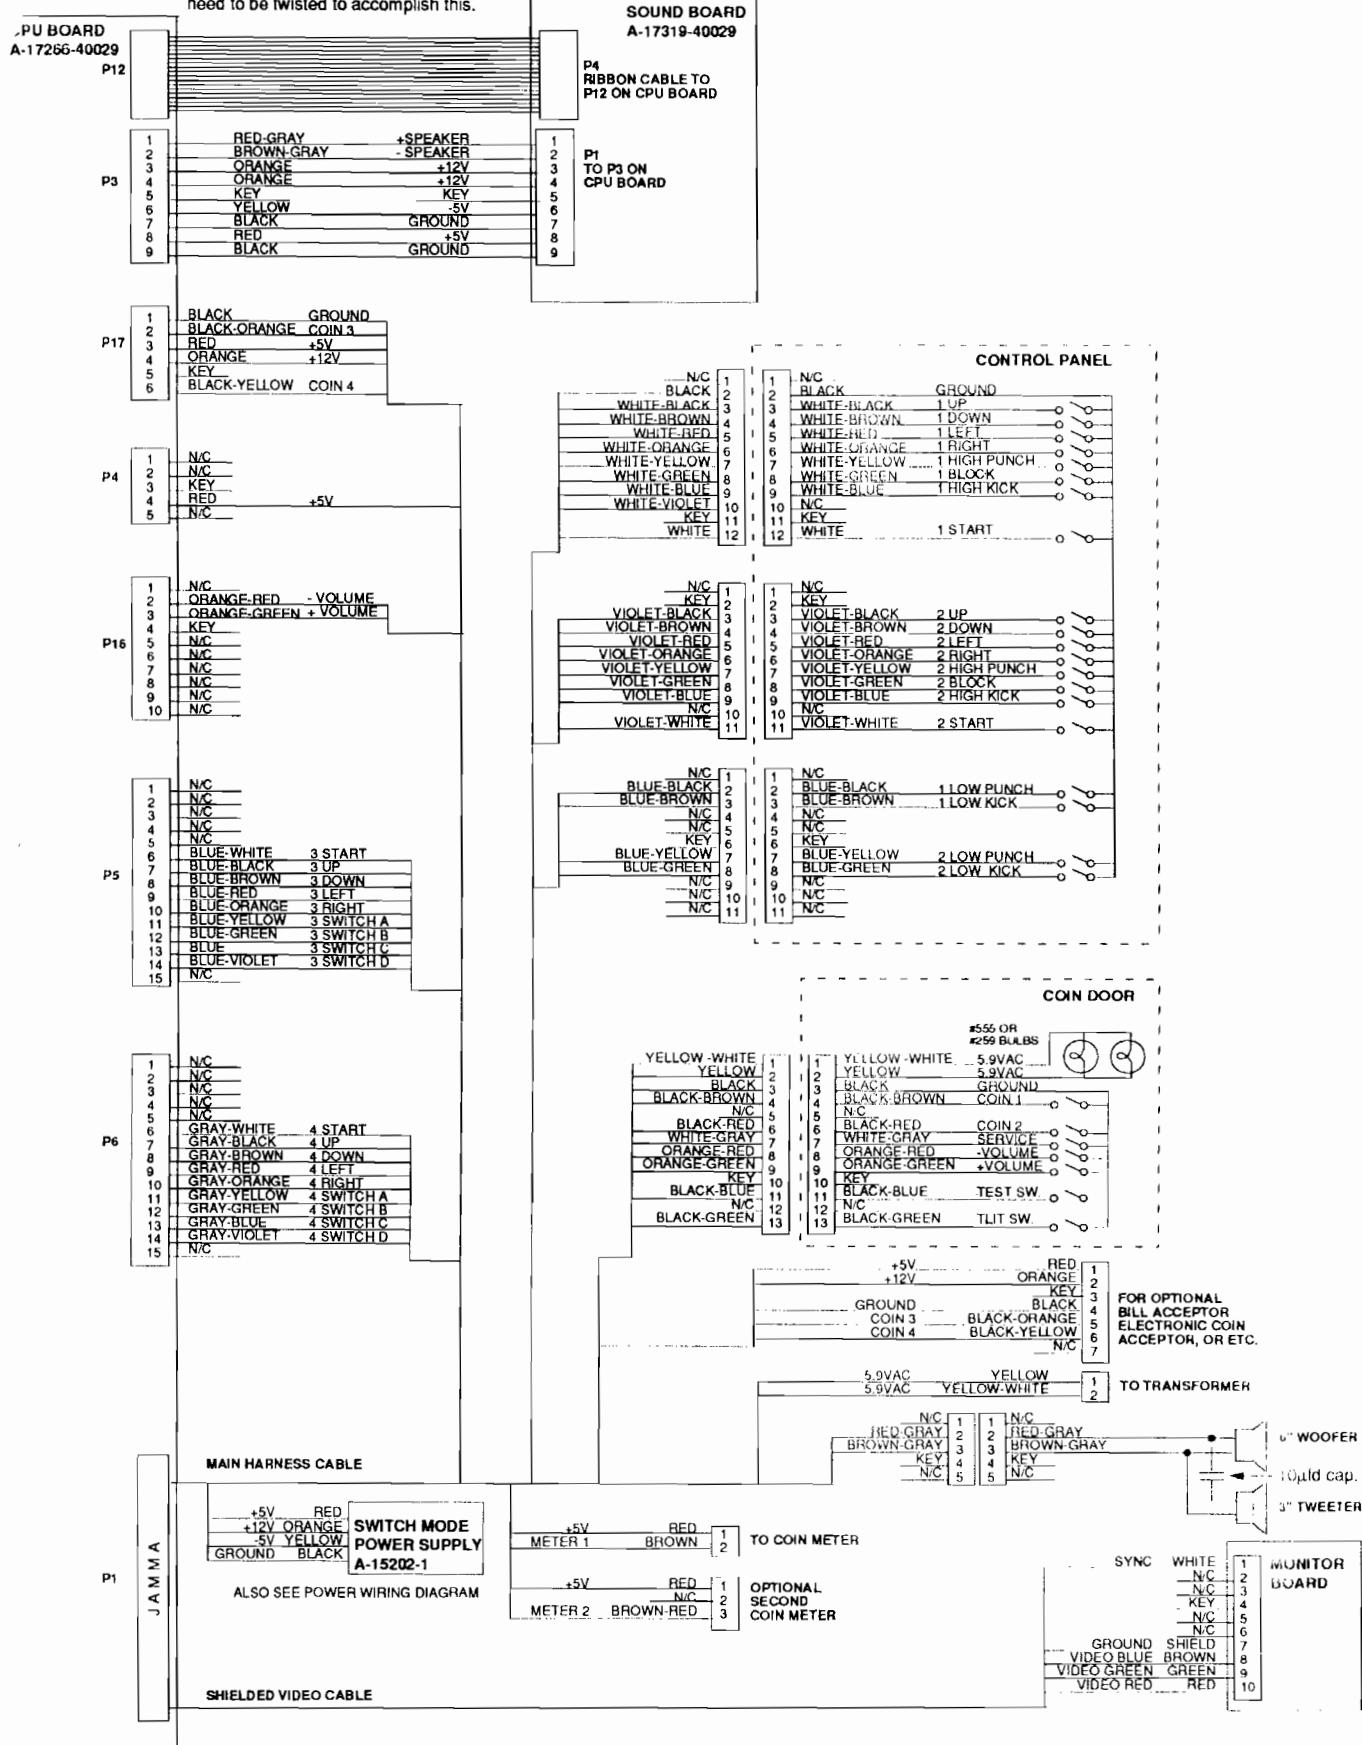


## Power Wiring Diagram

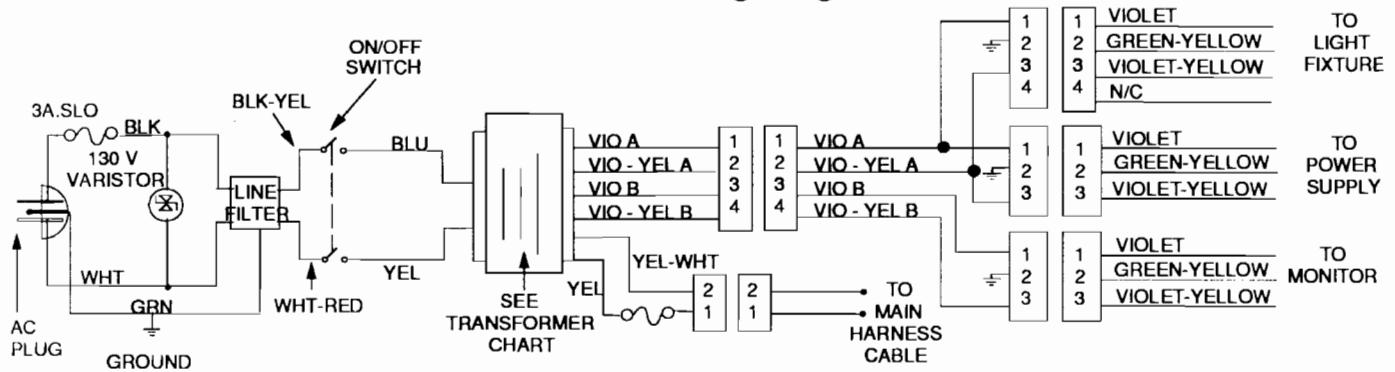

NOTE: FOR 230VAC OPERATION:

1. FUSE IS 2.0A SLOW BLOW.
2. VARISTOR IS 250V.

## Transformer Chart

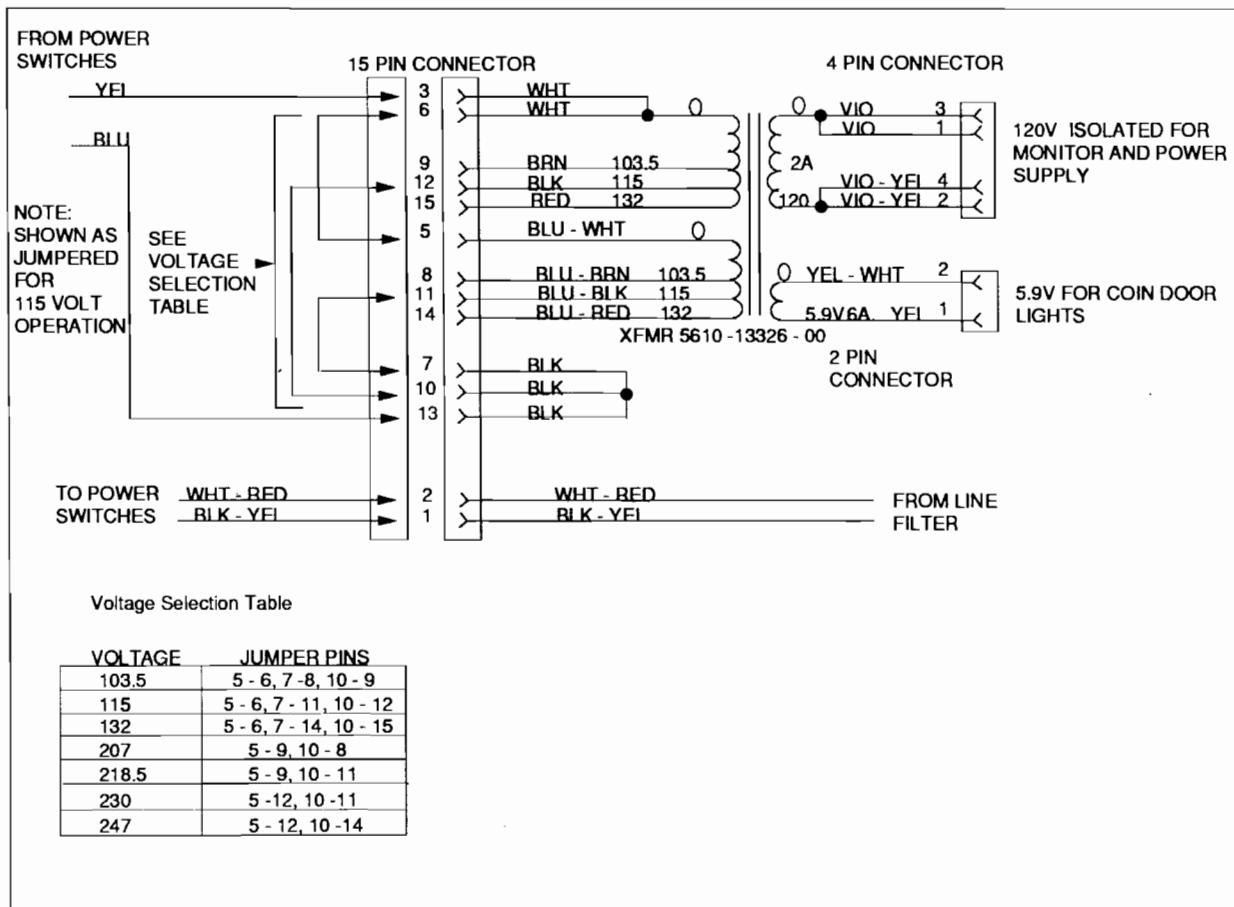

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

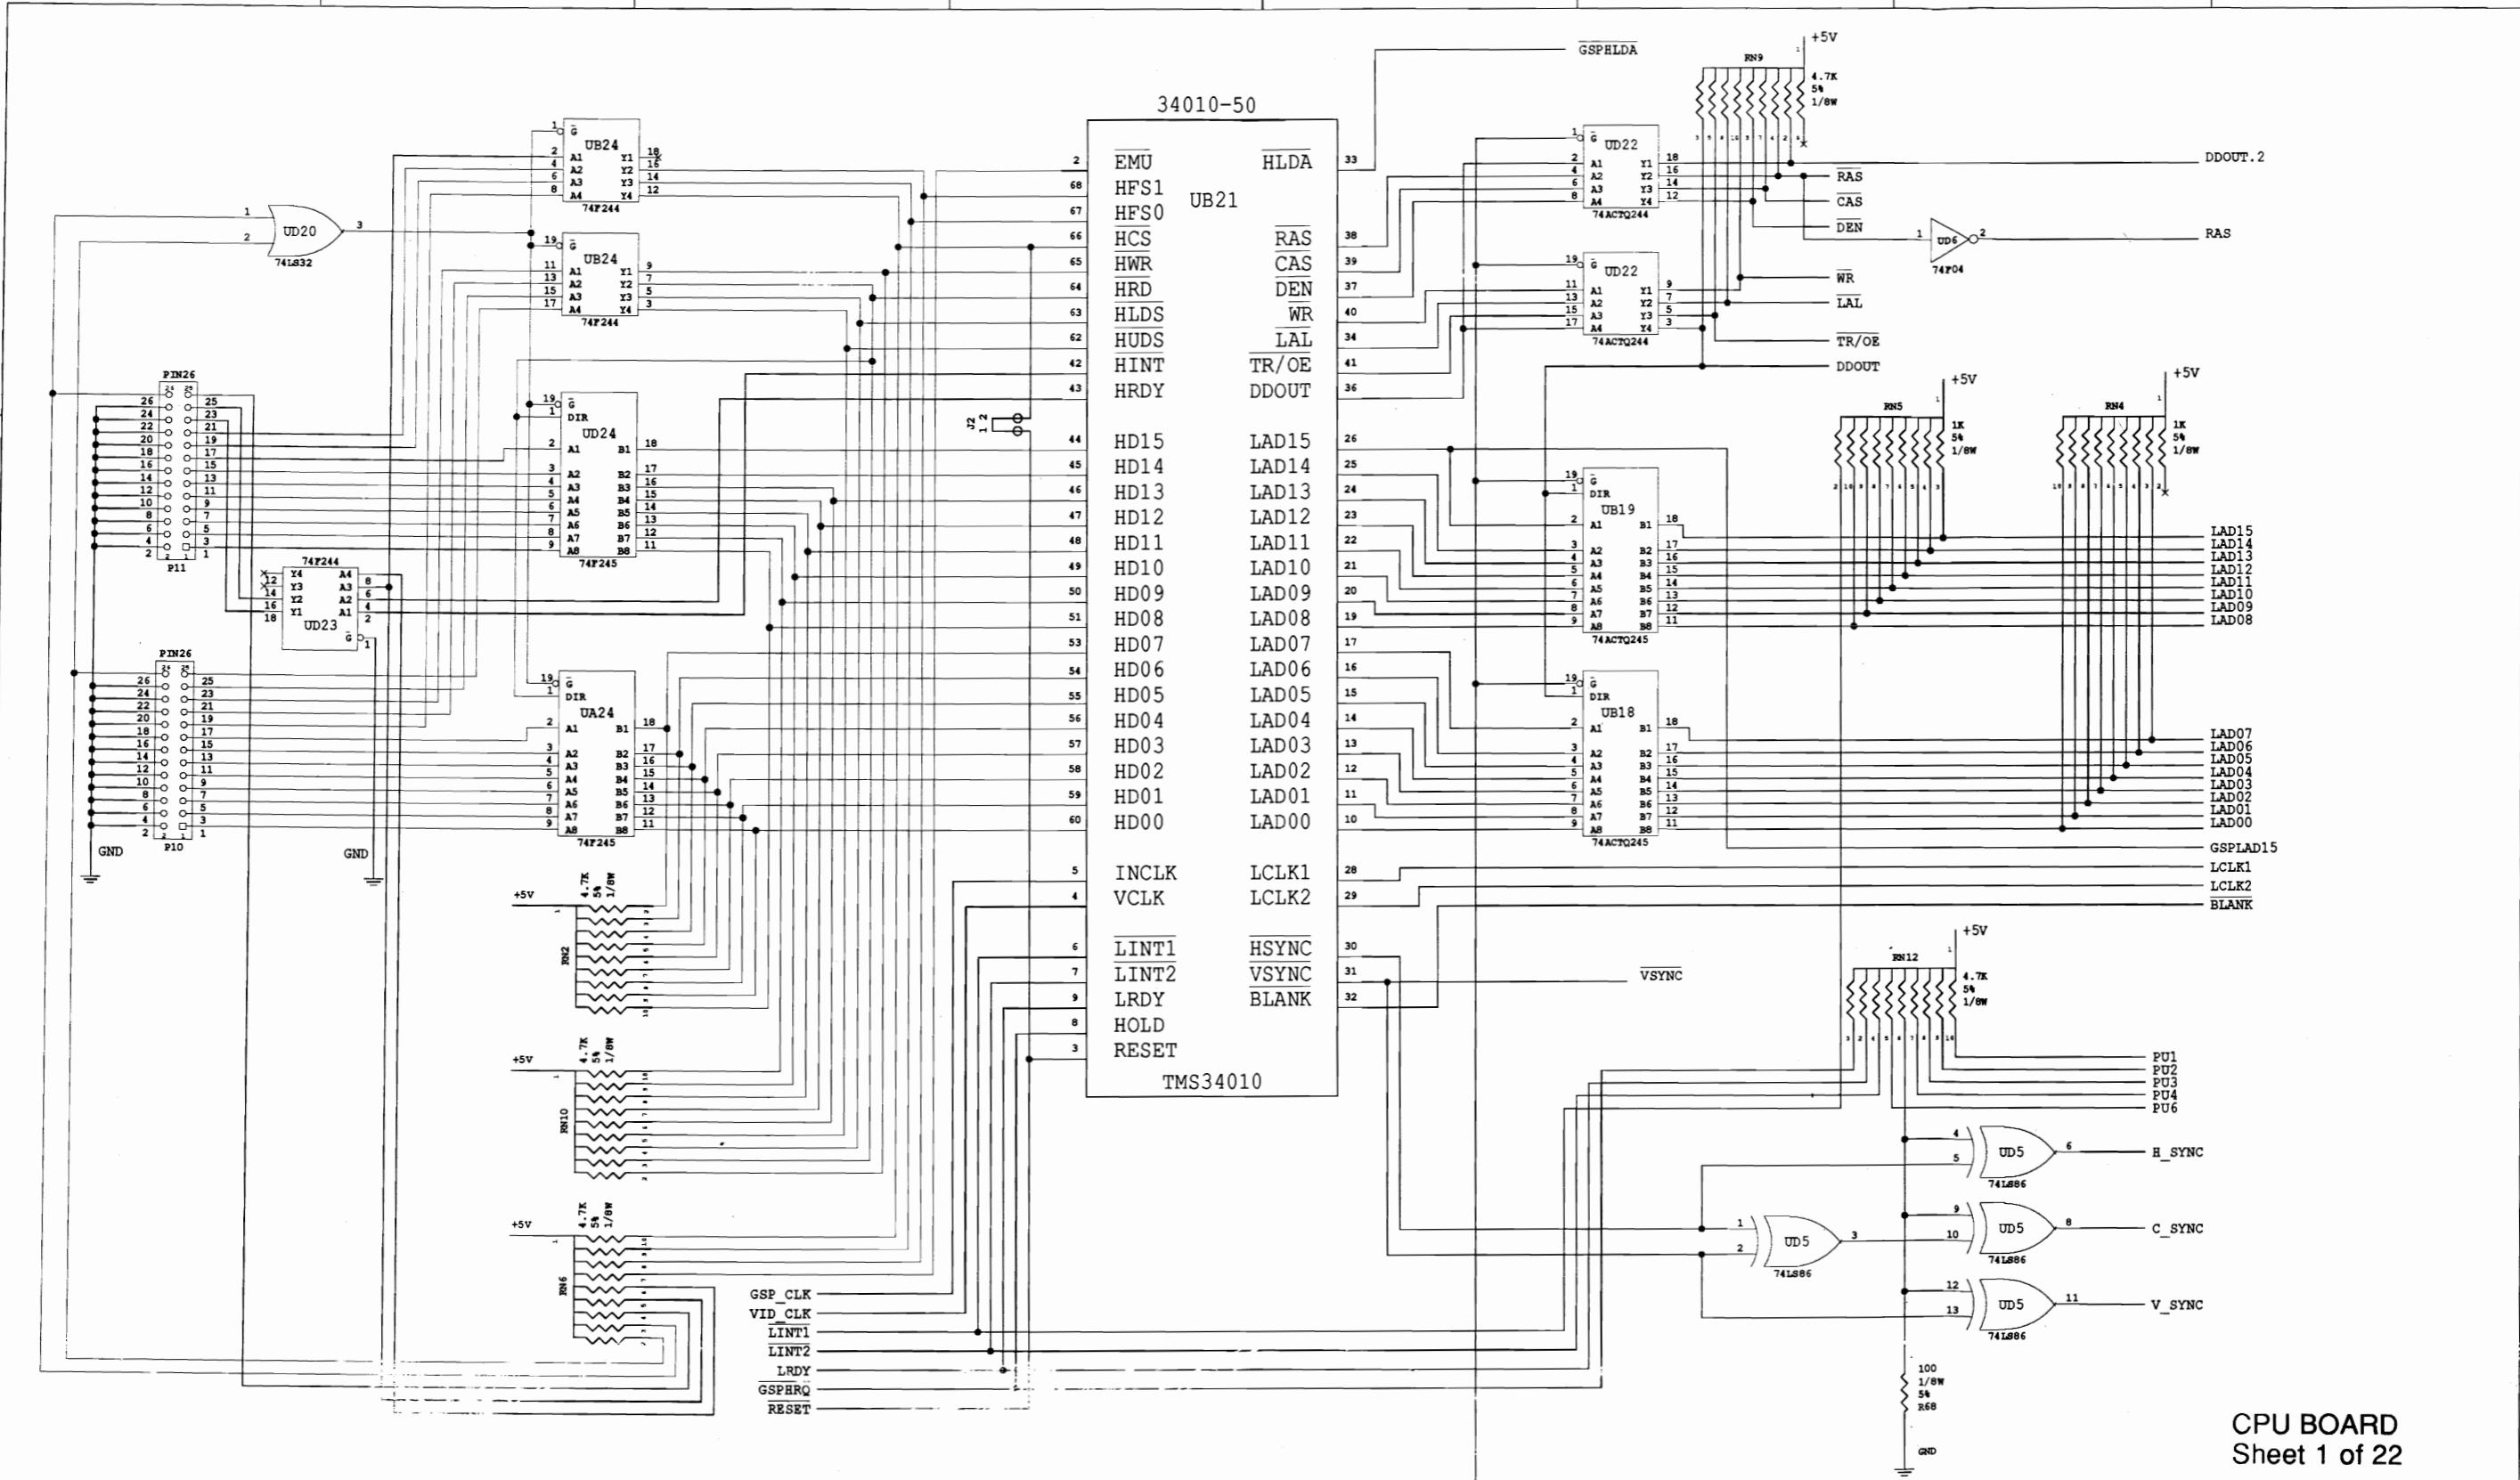

CPU BOARD  
Sheet 1 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIWAY MANUFACTURING COMPANY
DRW. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	
CHECKED	DATE	CURRENT PROJECT DATE	TITLE
REM	40023	19AUG93	34010 PROCESSOR
APPROVED	DATE	SHEET 01 OF 22	PART NO. 16-9470 REV. 5

1

2

3

4

5


6

7


8

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

D

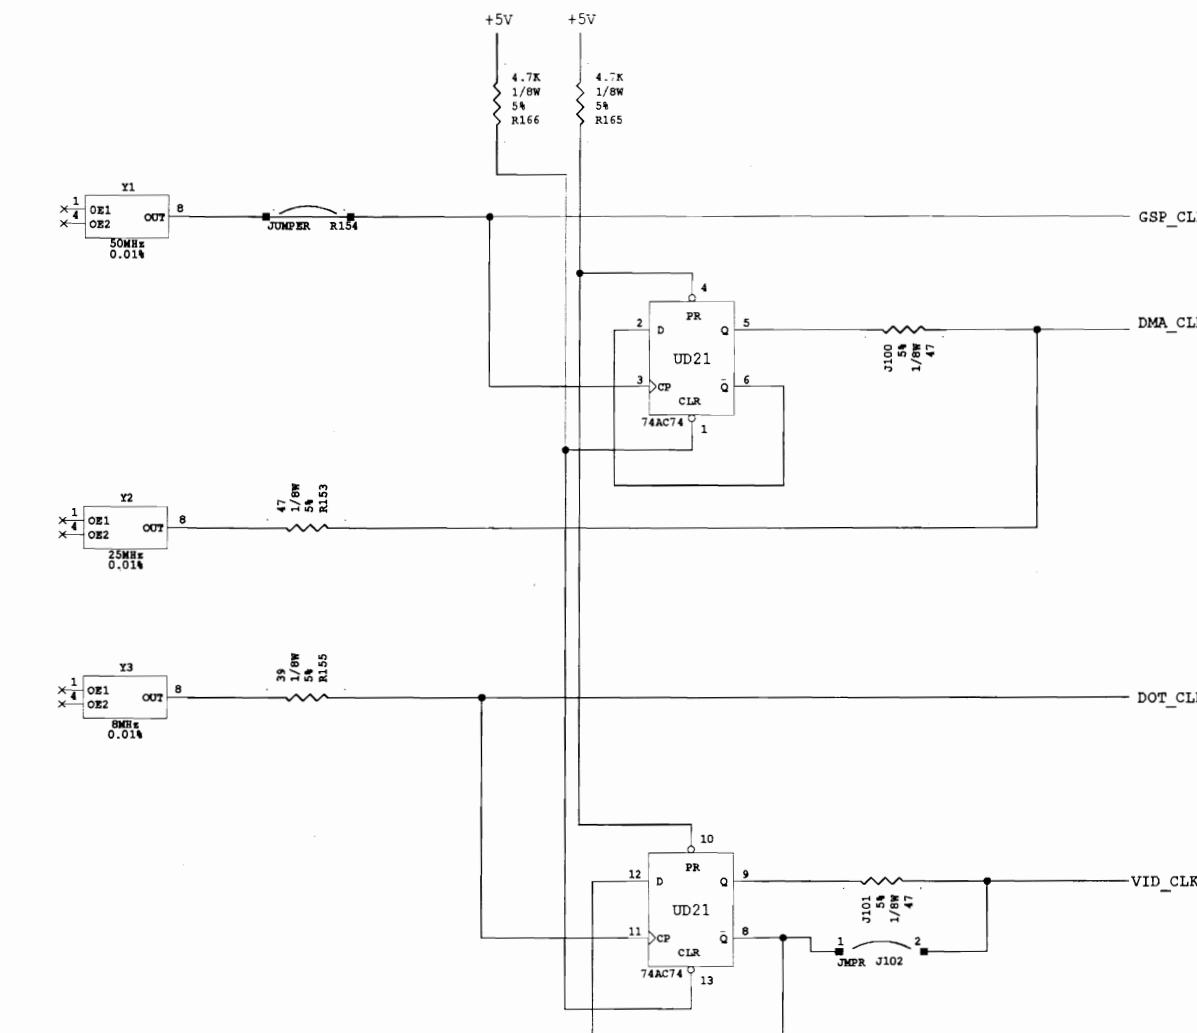

C

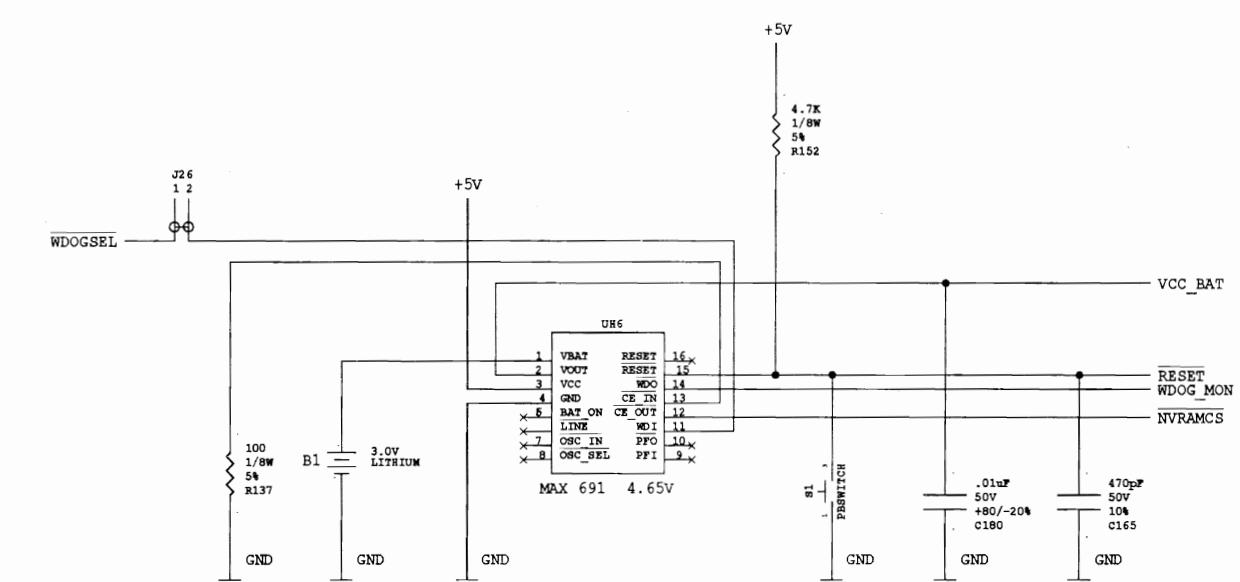


B

CPU BOARD  
Sheet 2 of 22


INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG. REM	FIRST PROJ. NO 40023	DATE 09DEC92	WILLIAMS ELECTRONICS AND GAMES INC. MIDWAY MANUFACTURING COMPANY
DWN. BY REM	DATE A-14816	FIRST USAGE 09DEC92	3401 N. CALIFORNIA AVE. CHICAGO IL.
CHECKED REM	DATE 40023	CURRENT PROJECT 19AUG93	TITLE CLOCK GENERATION/POWER MONITOR
APPROVED REM	DATE 02	SHEET OF 22	PART NO. 16-9470 REV. 5

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

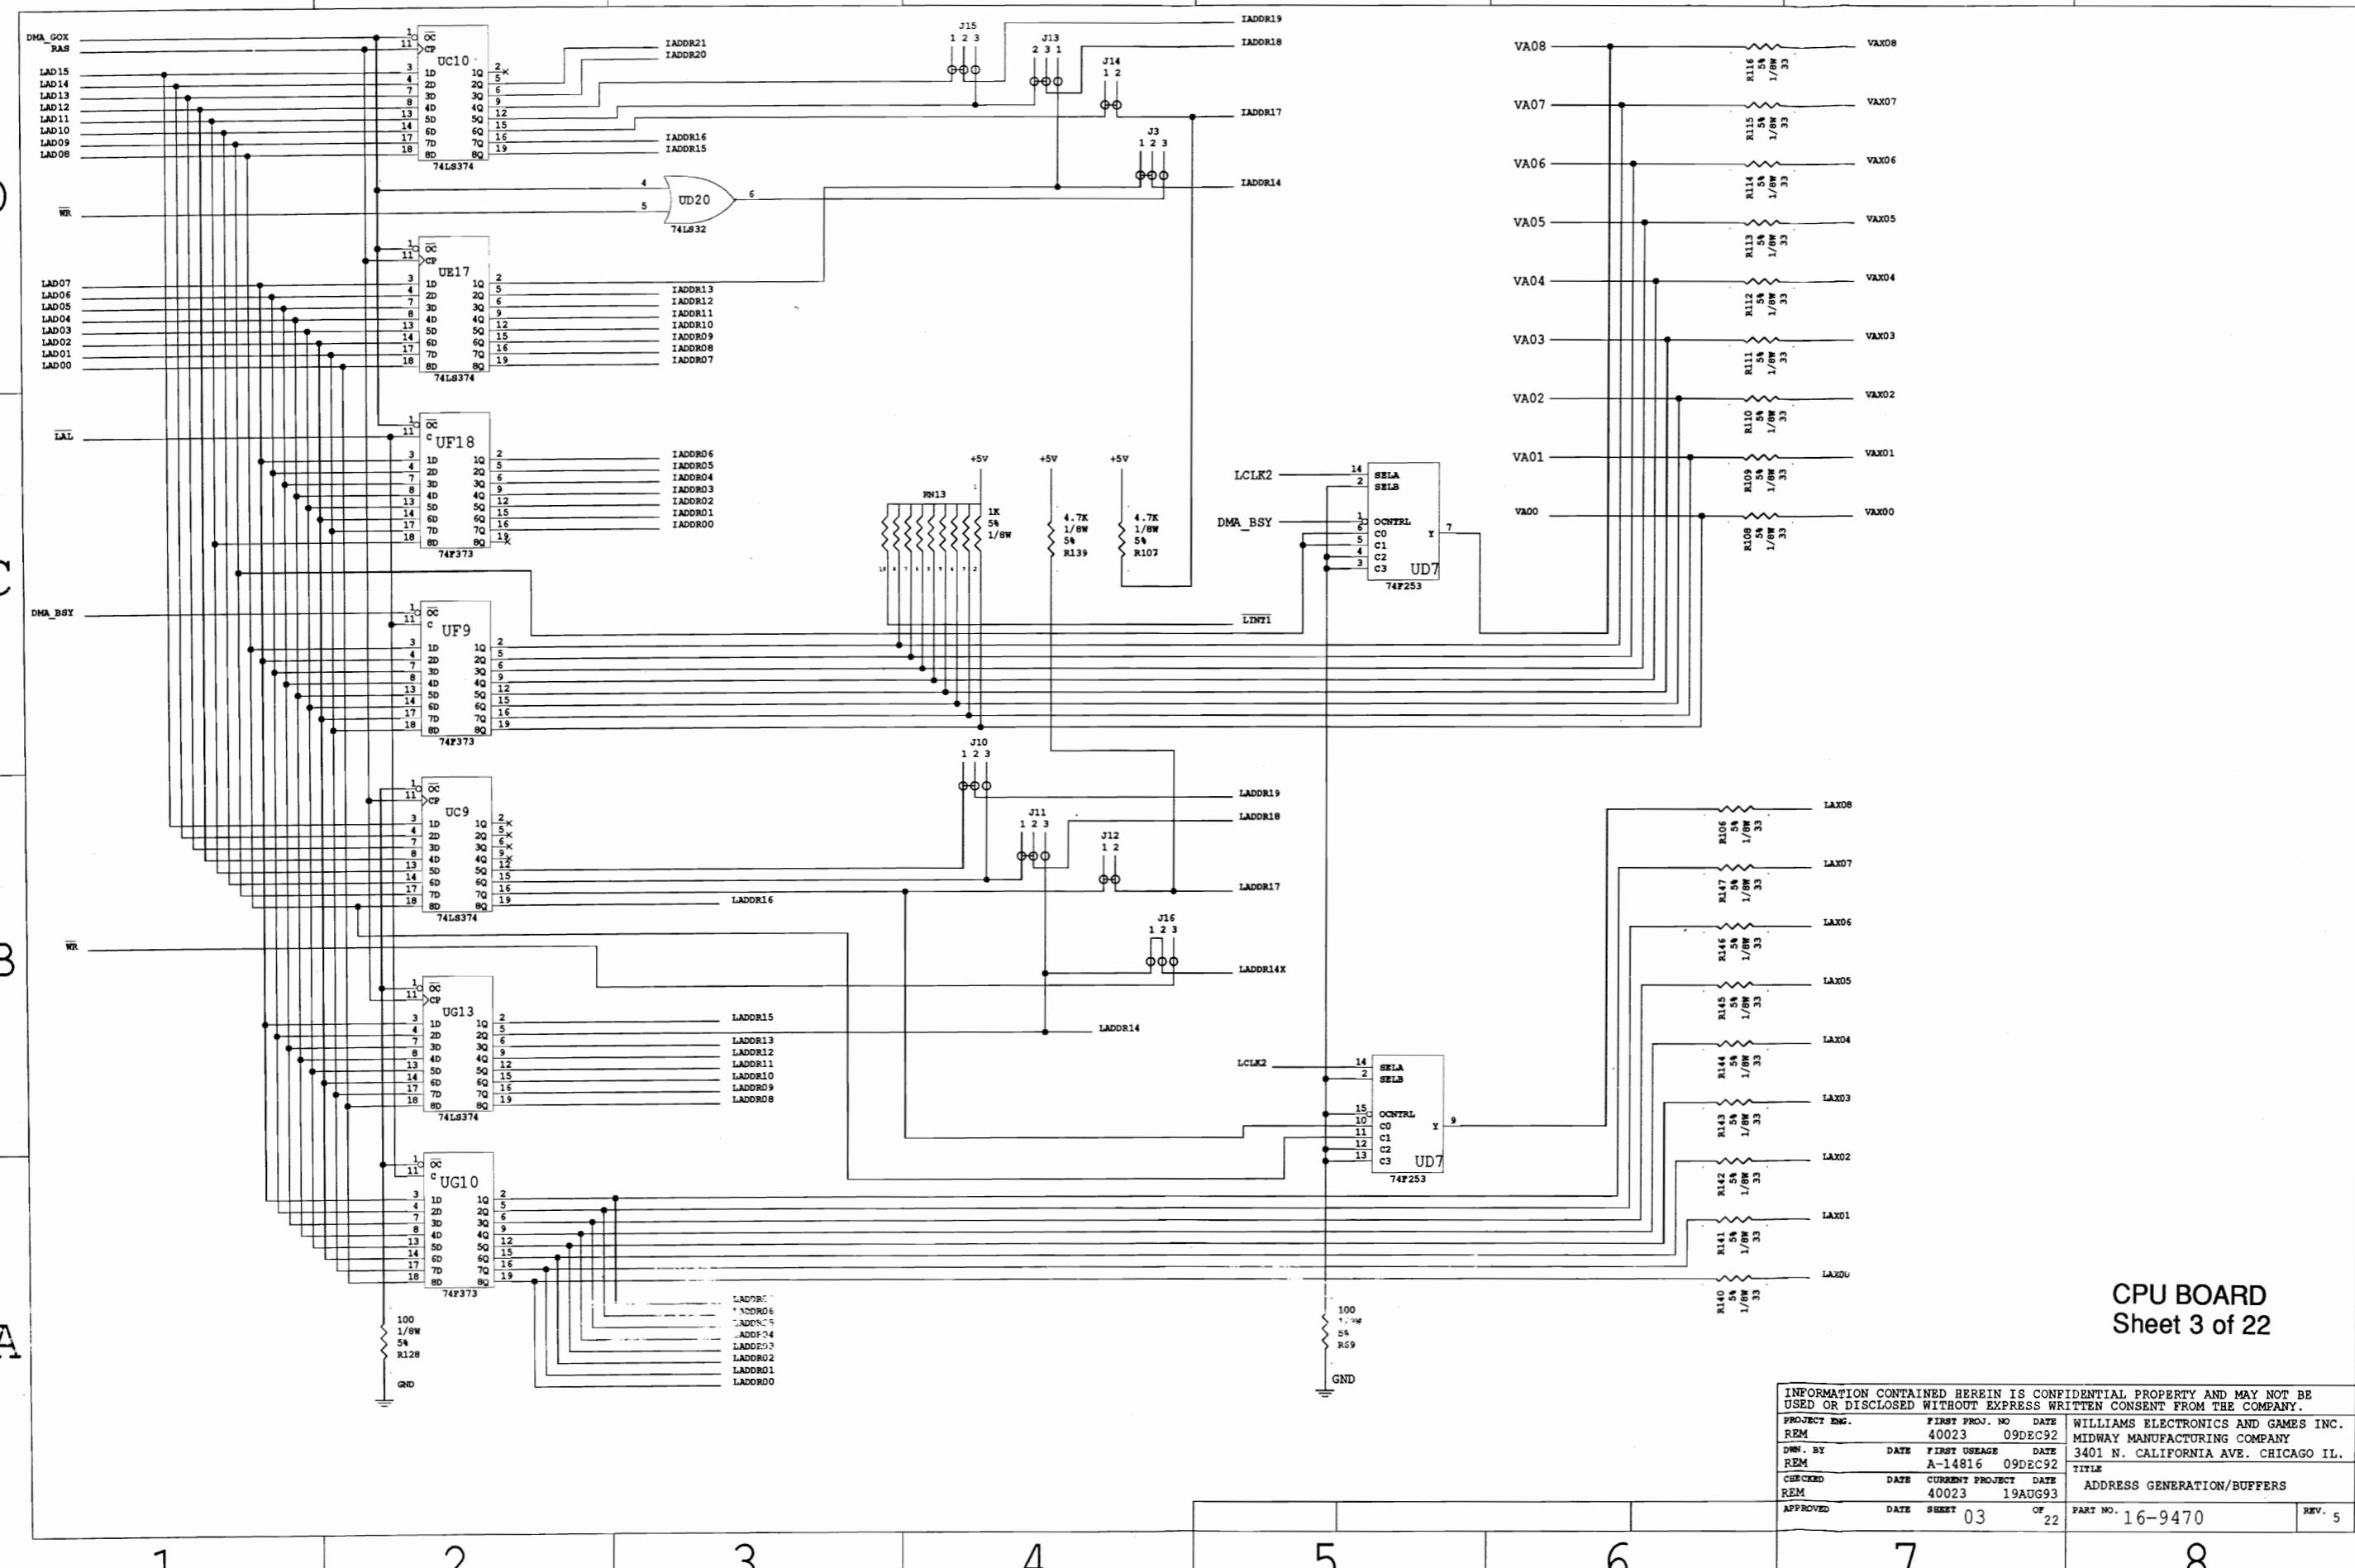

CPU BOARD  
Sheet 3 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM.	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DRAWN BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM.	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	ADDRESS GENERATION/BUFFERS
REM.	40023	19AUG93	
APPROVED	DATE	SHEET #	REV. 5
	03	OF 22	PART NO. 16-9470

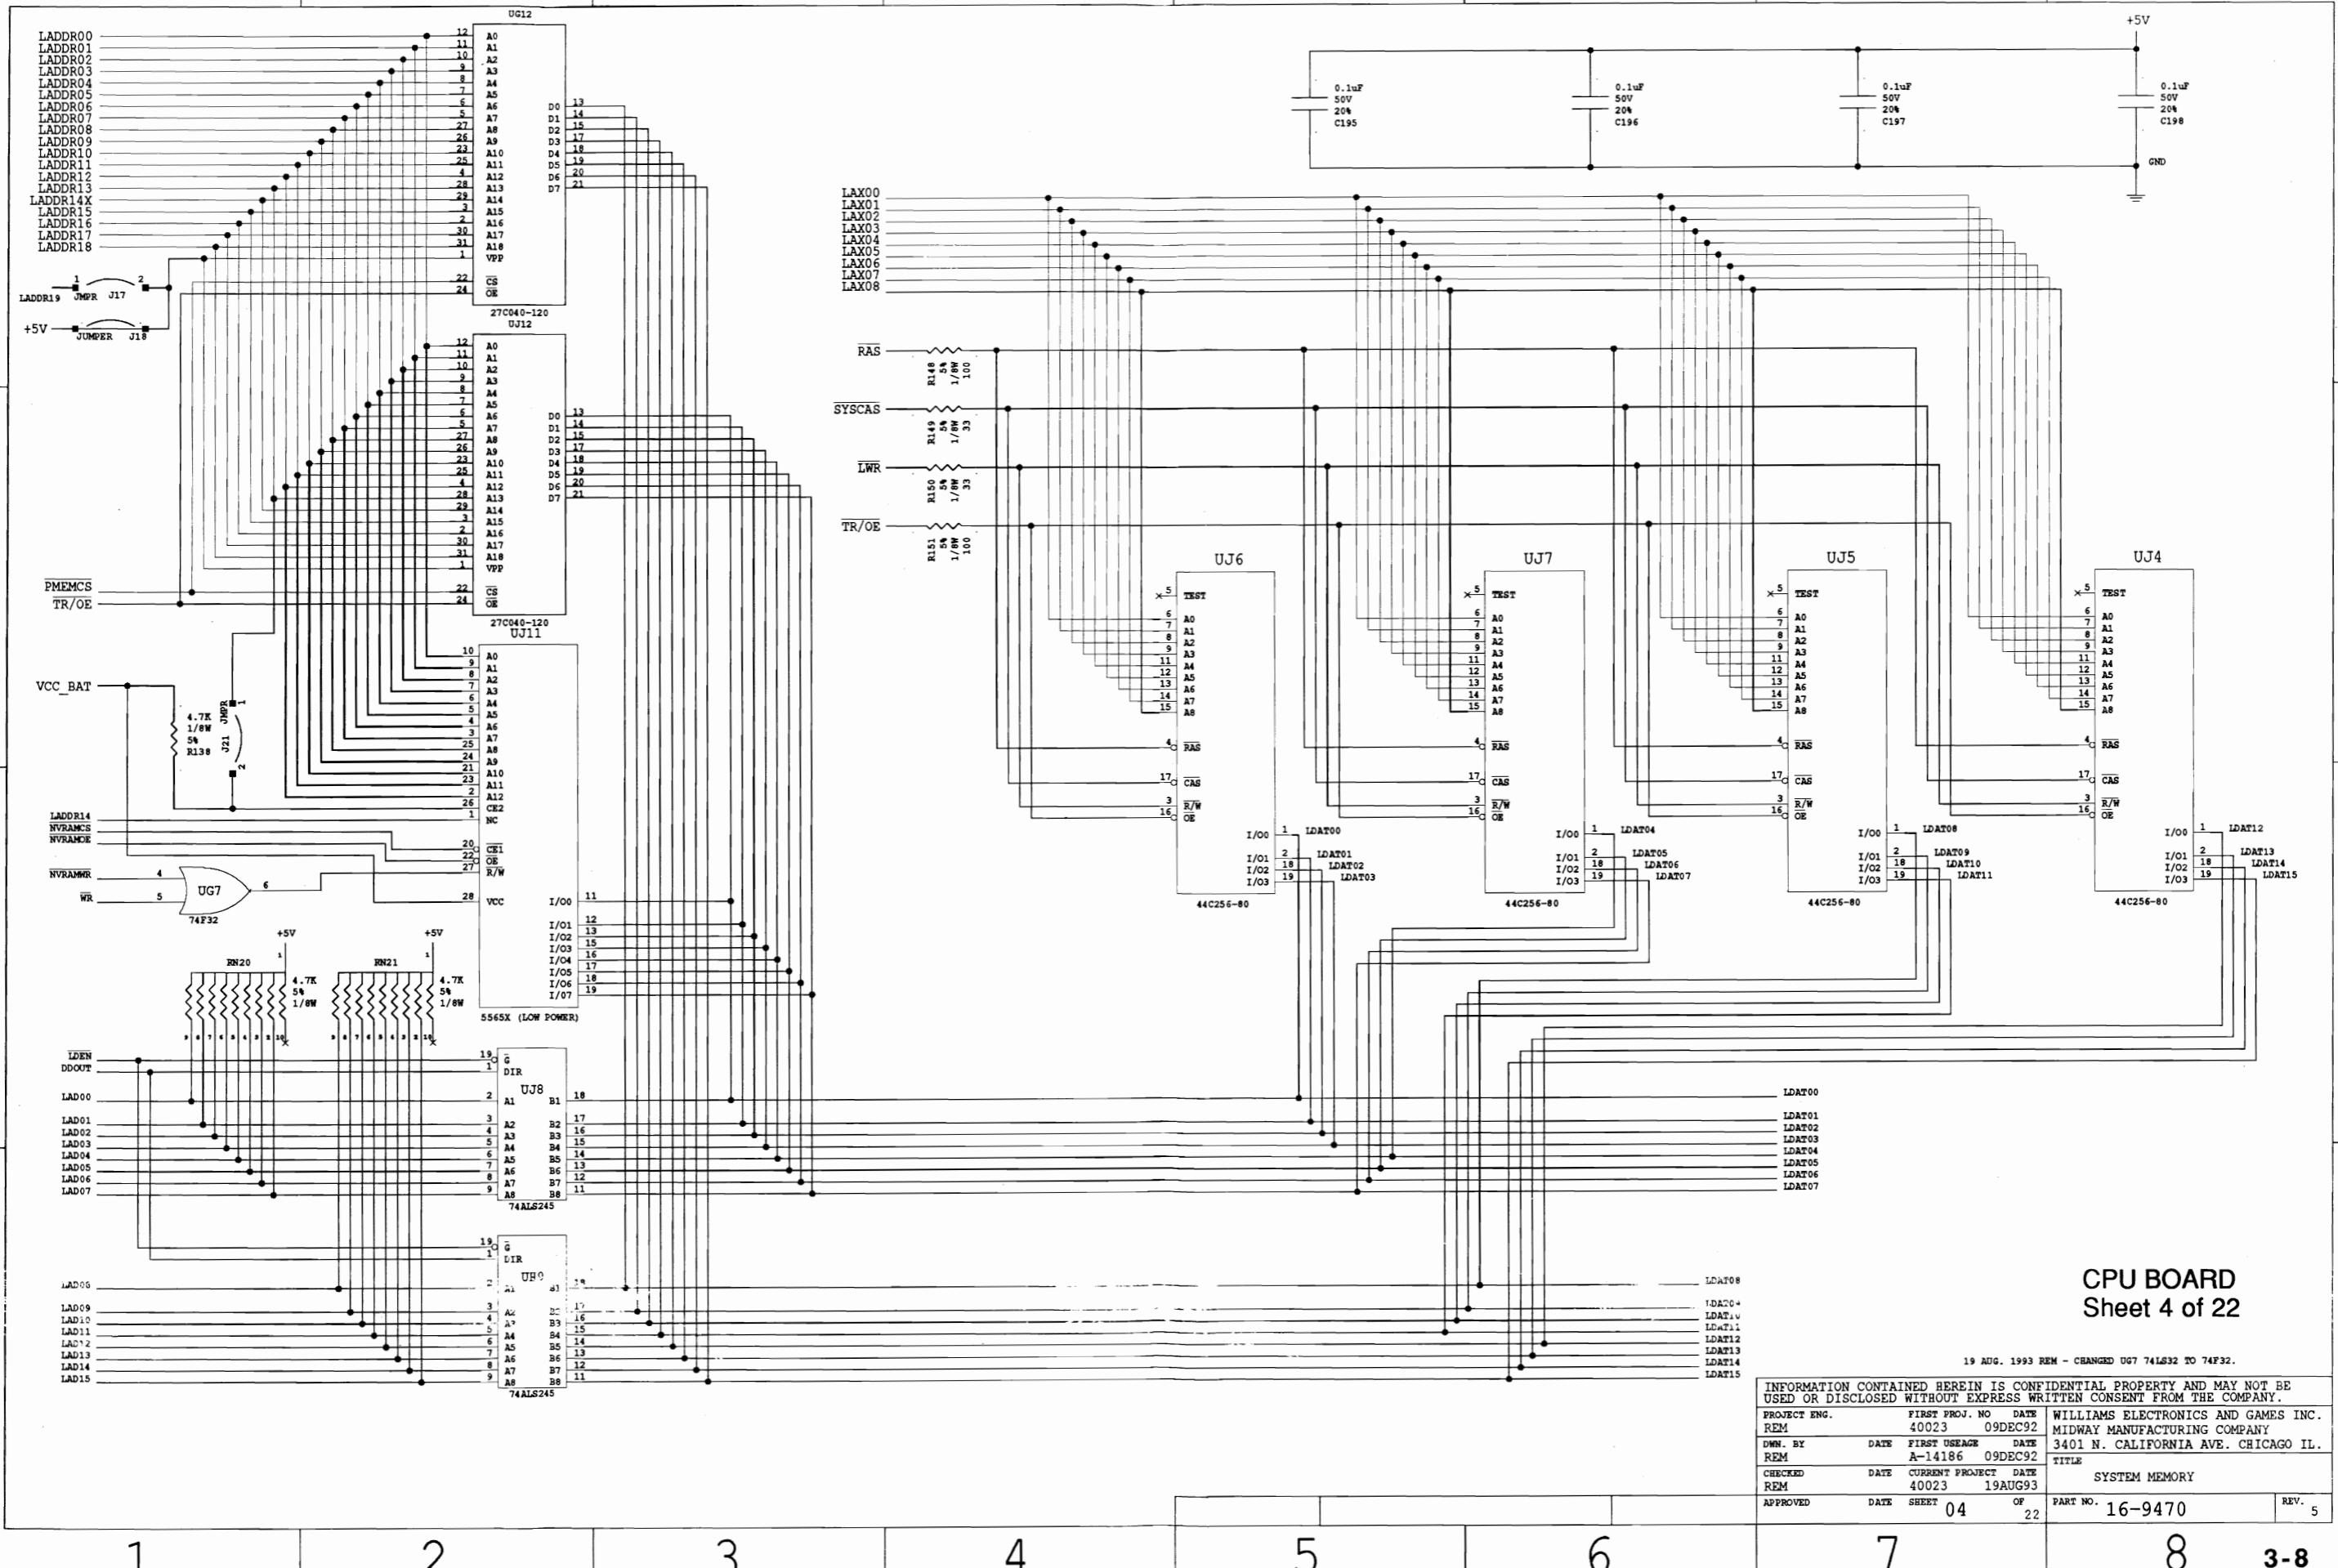

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

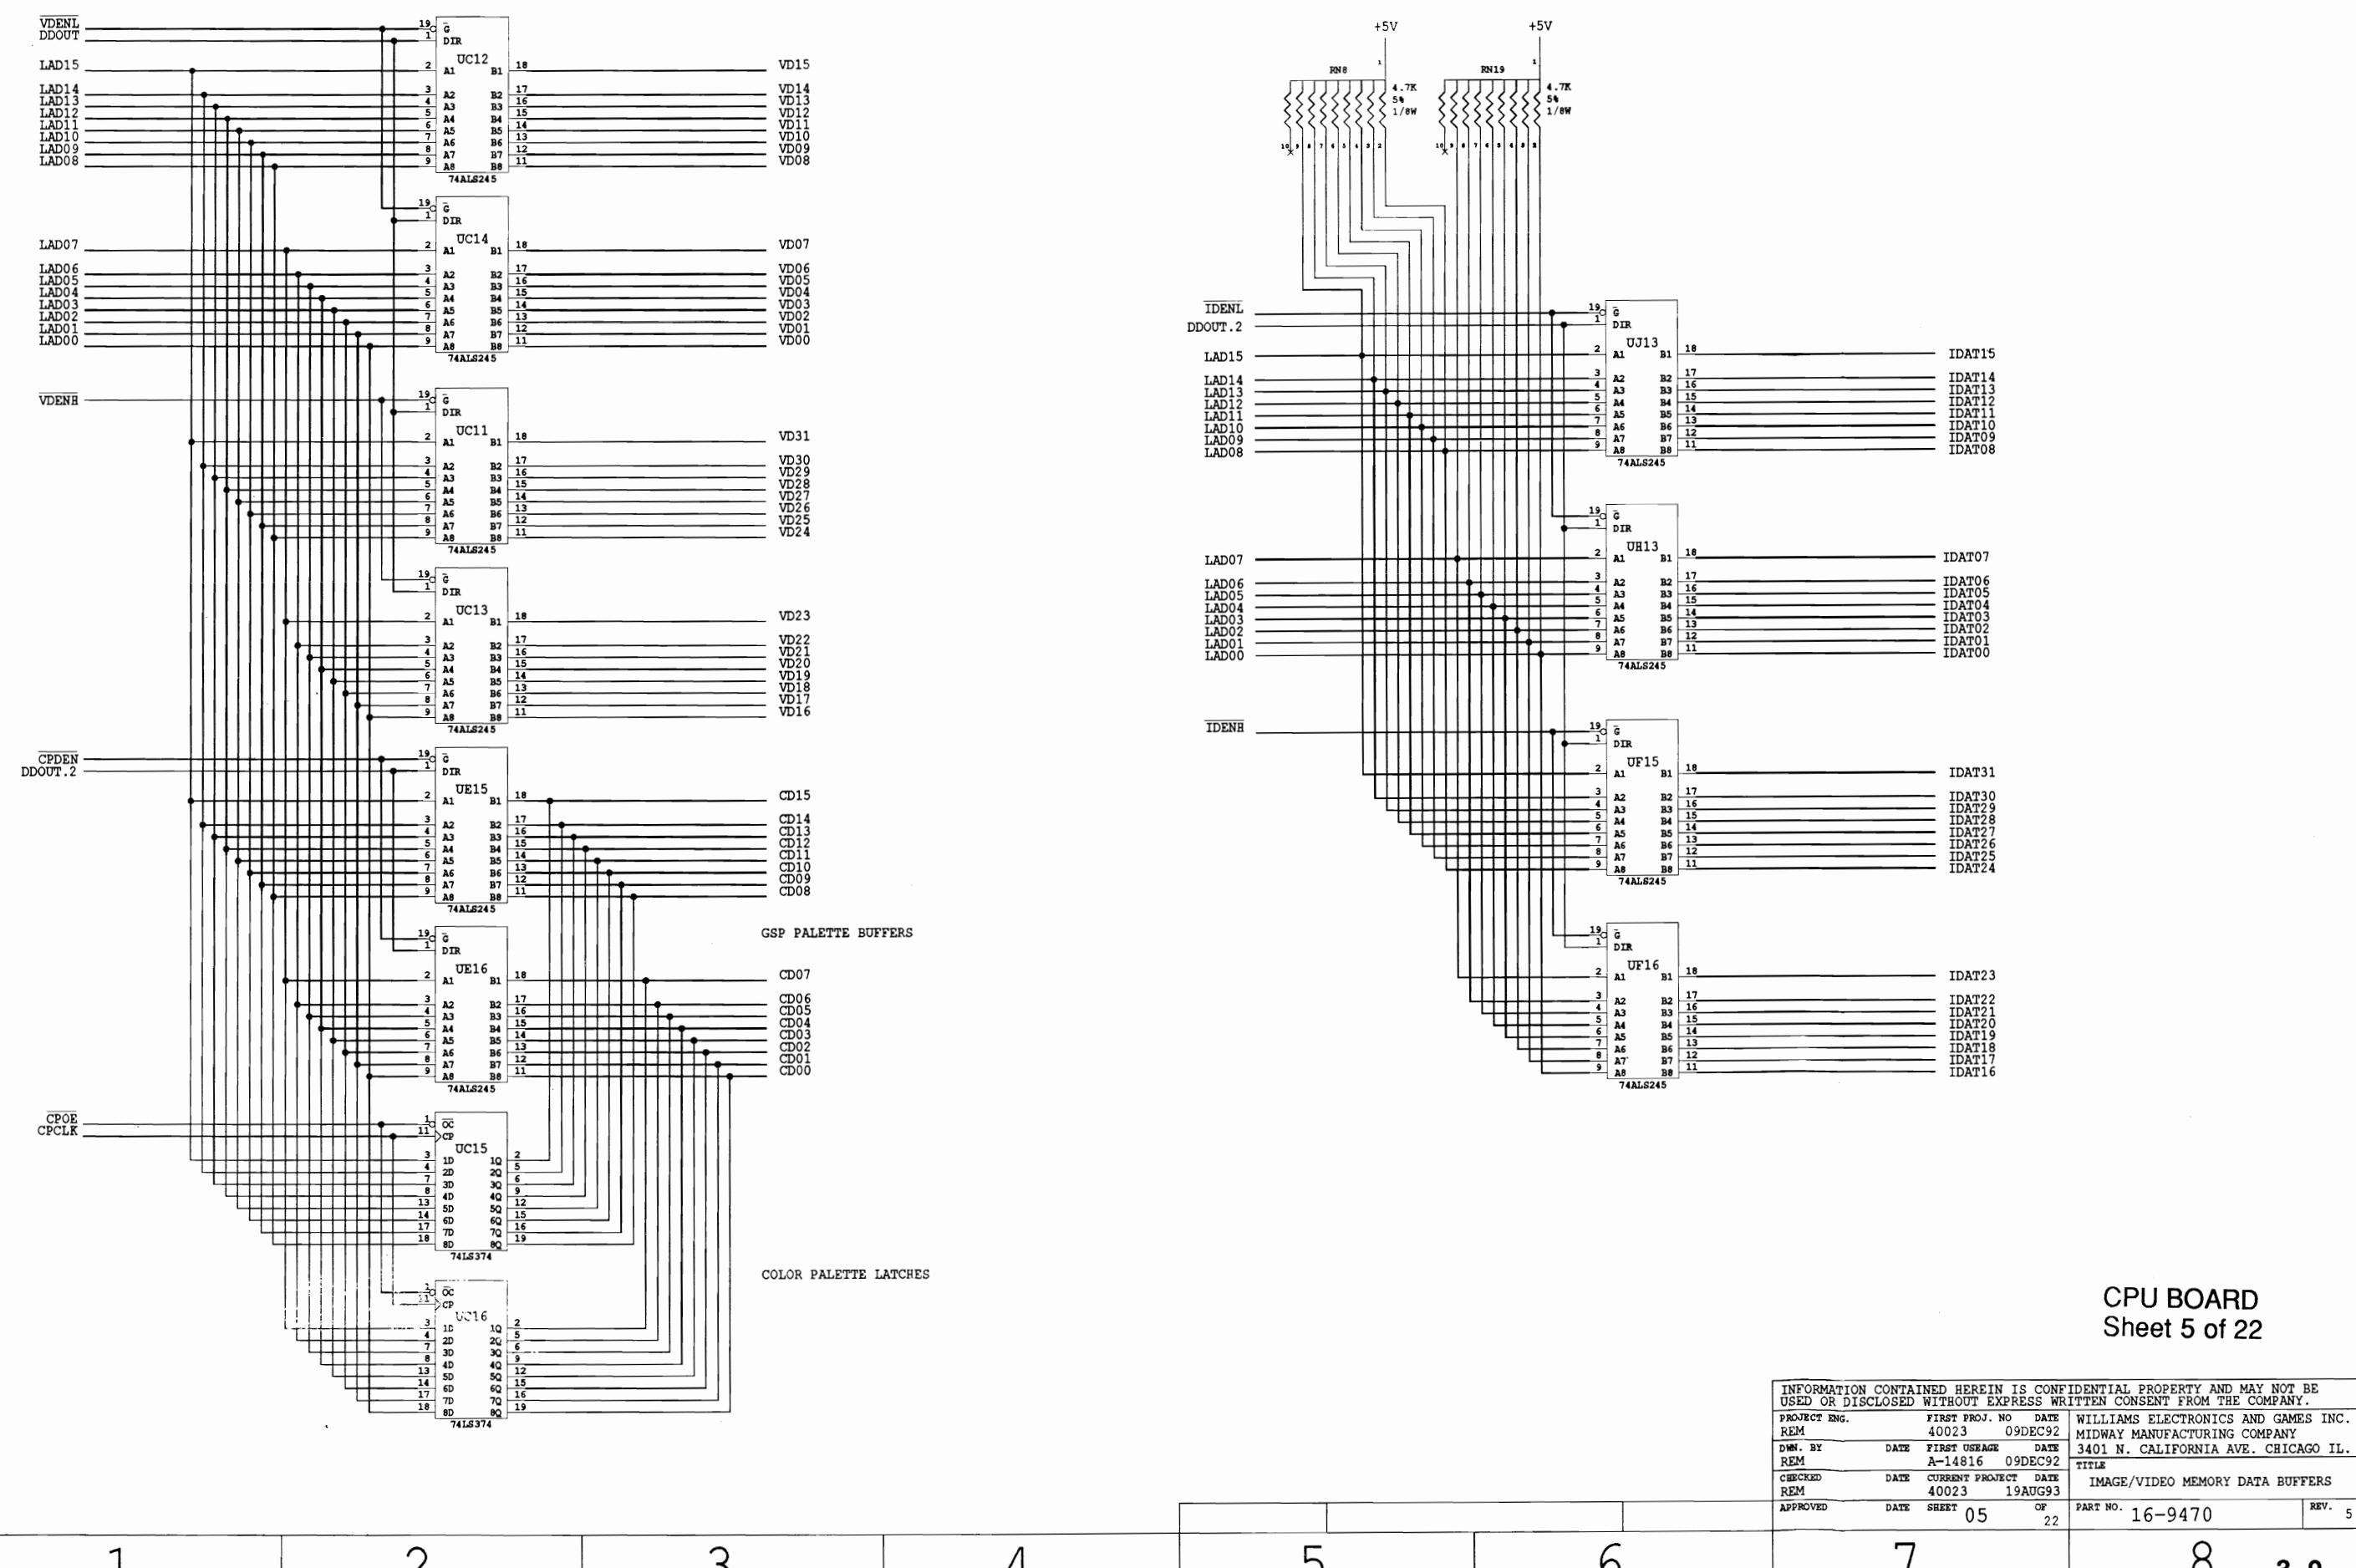

CPU BOARD  
Sheet 5 of 22

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A






A

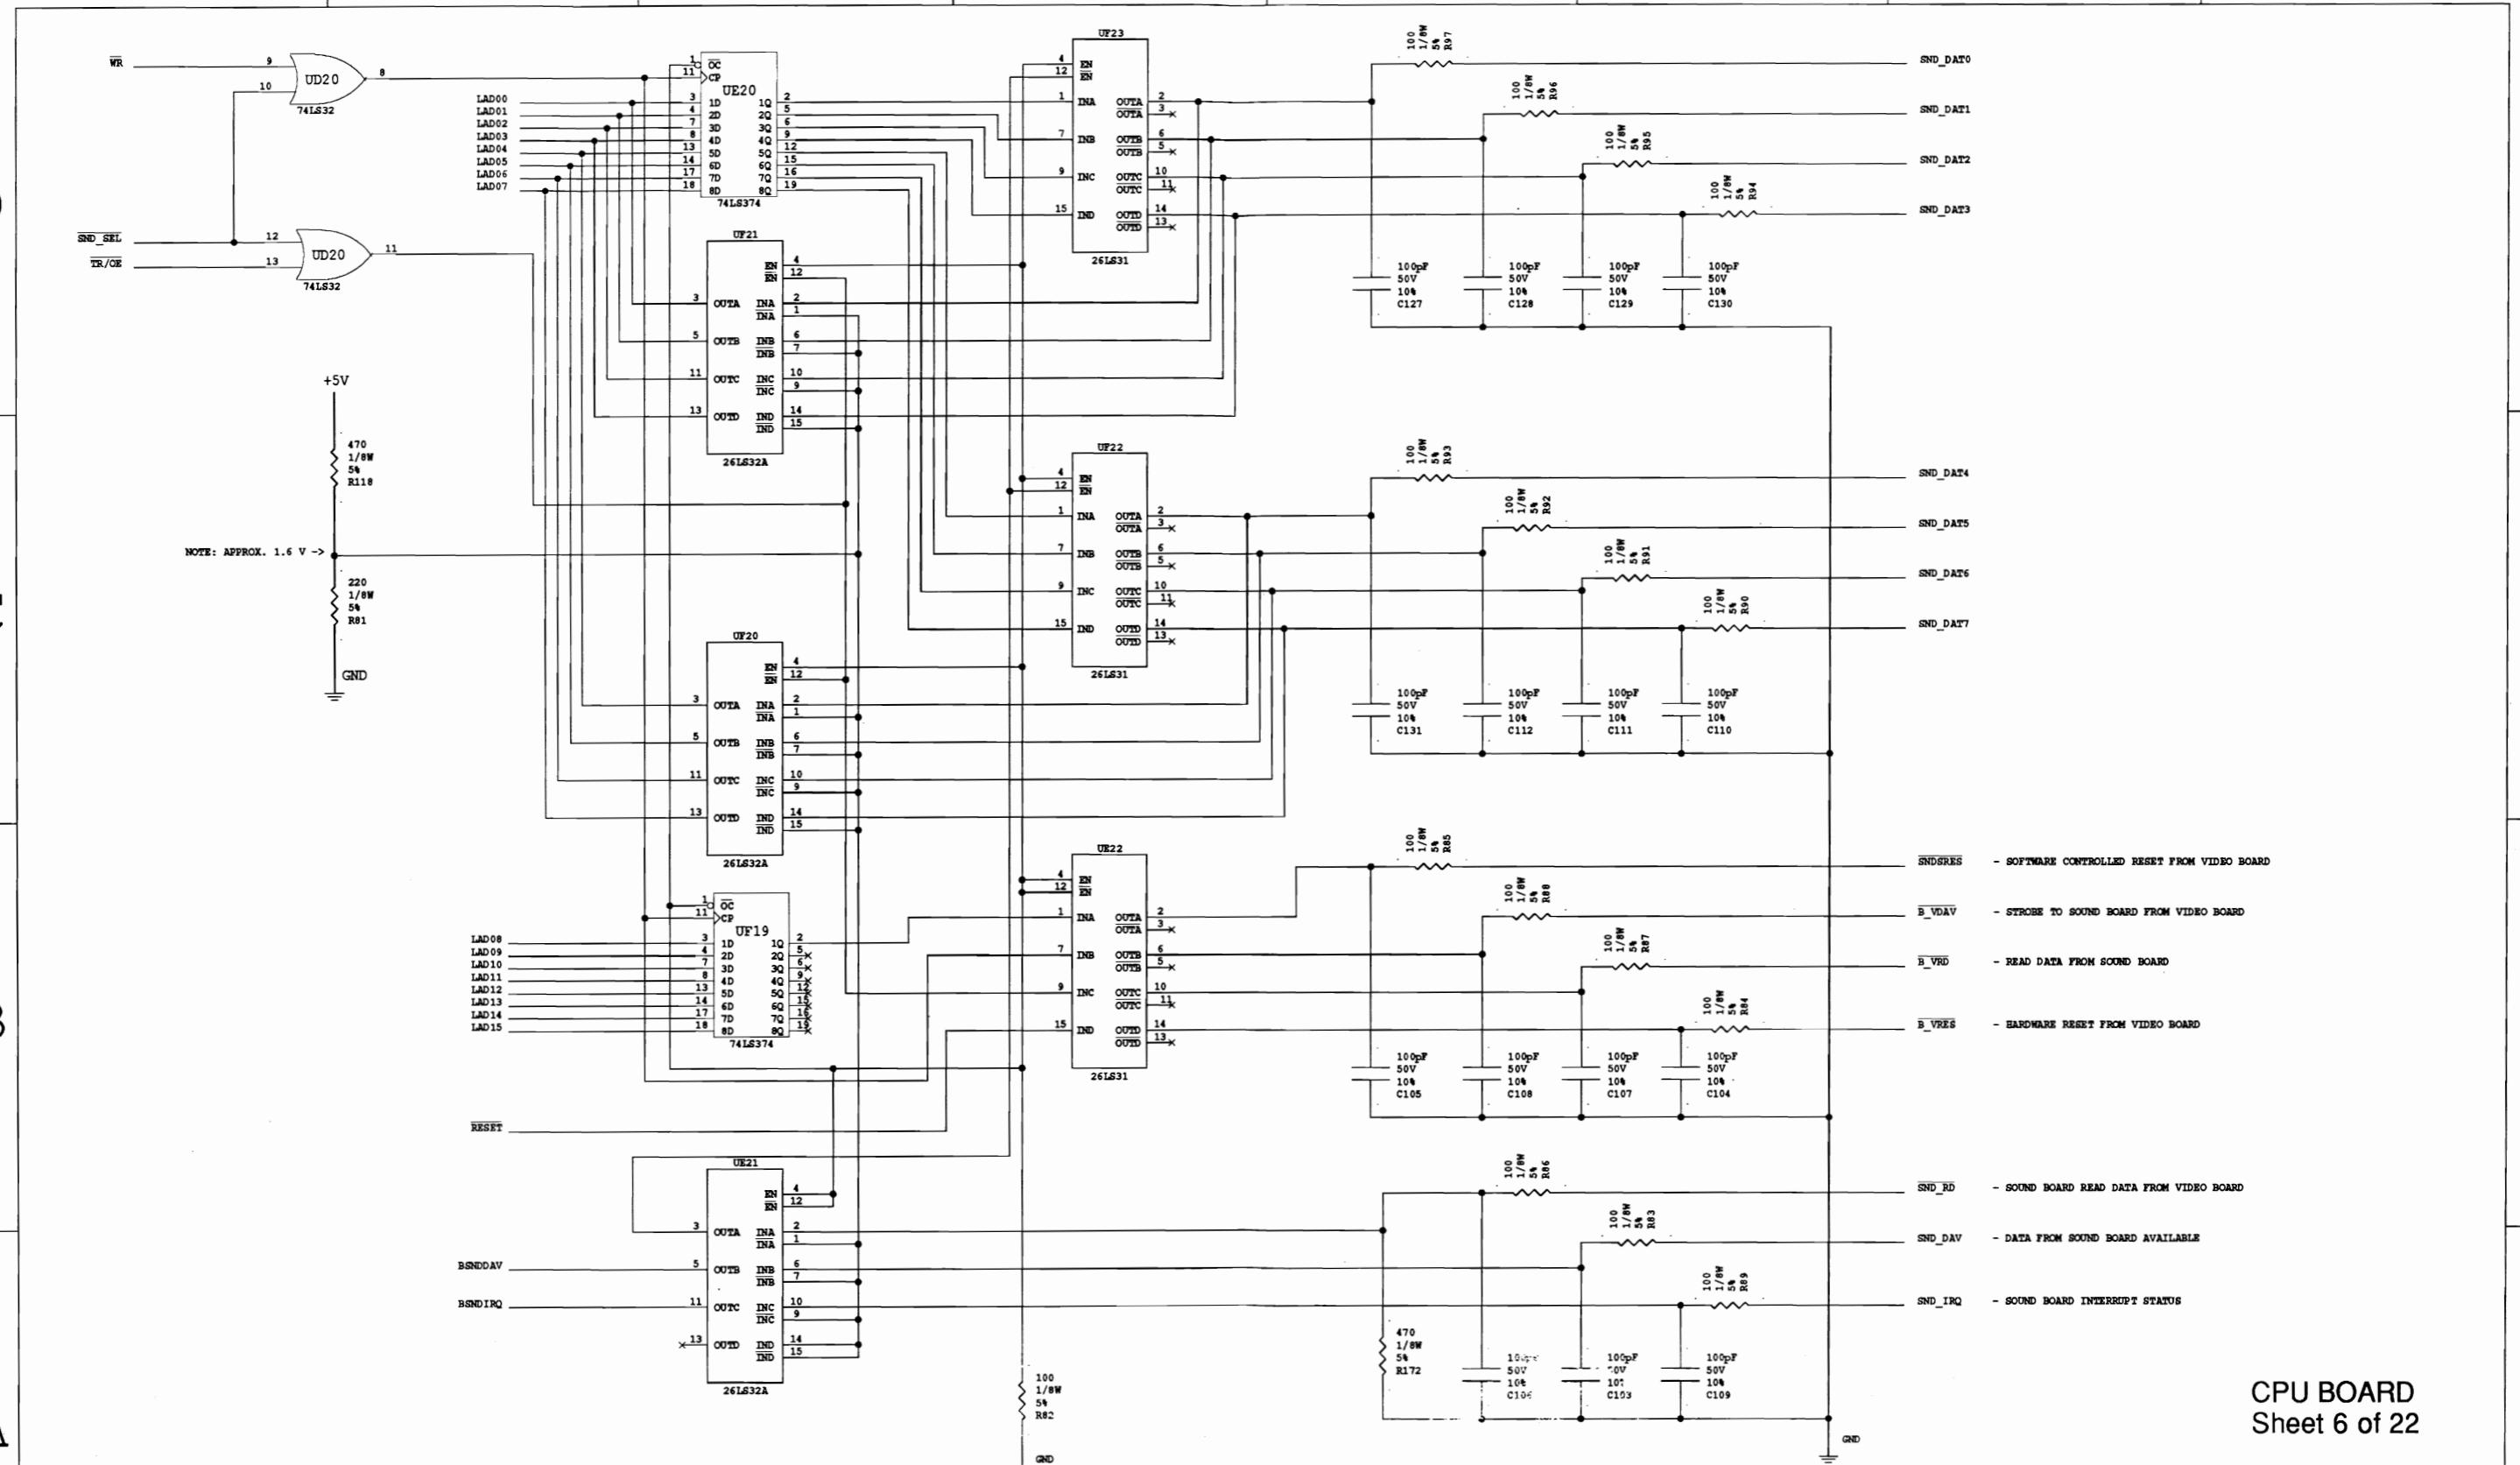

CPU BOARD  
Sheet 6 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DNN. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	SOUND INTERFACE
REM	40023	19AUG93	
APPROVED	DATE	SHEET 06 OF 22	PART NO. 16-9470 REV. 5

D

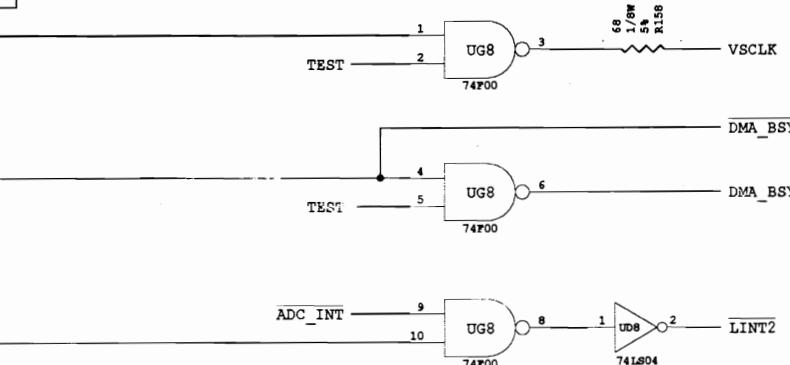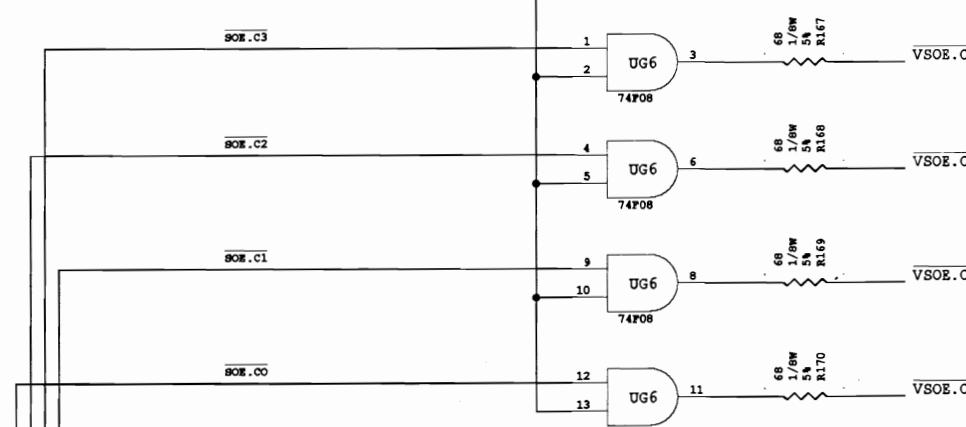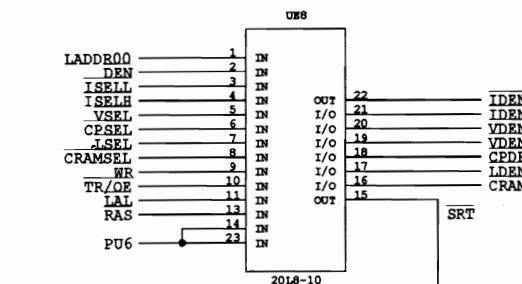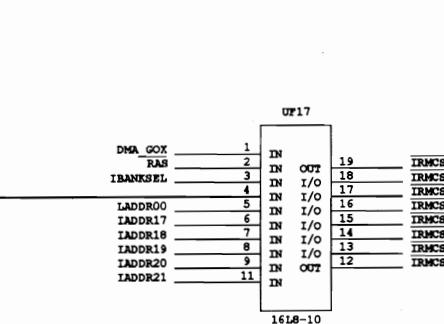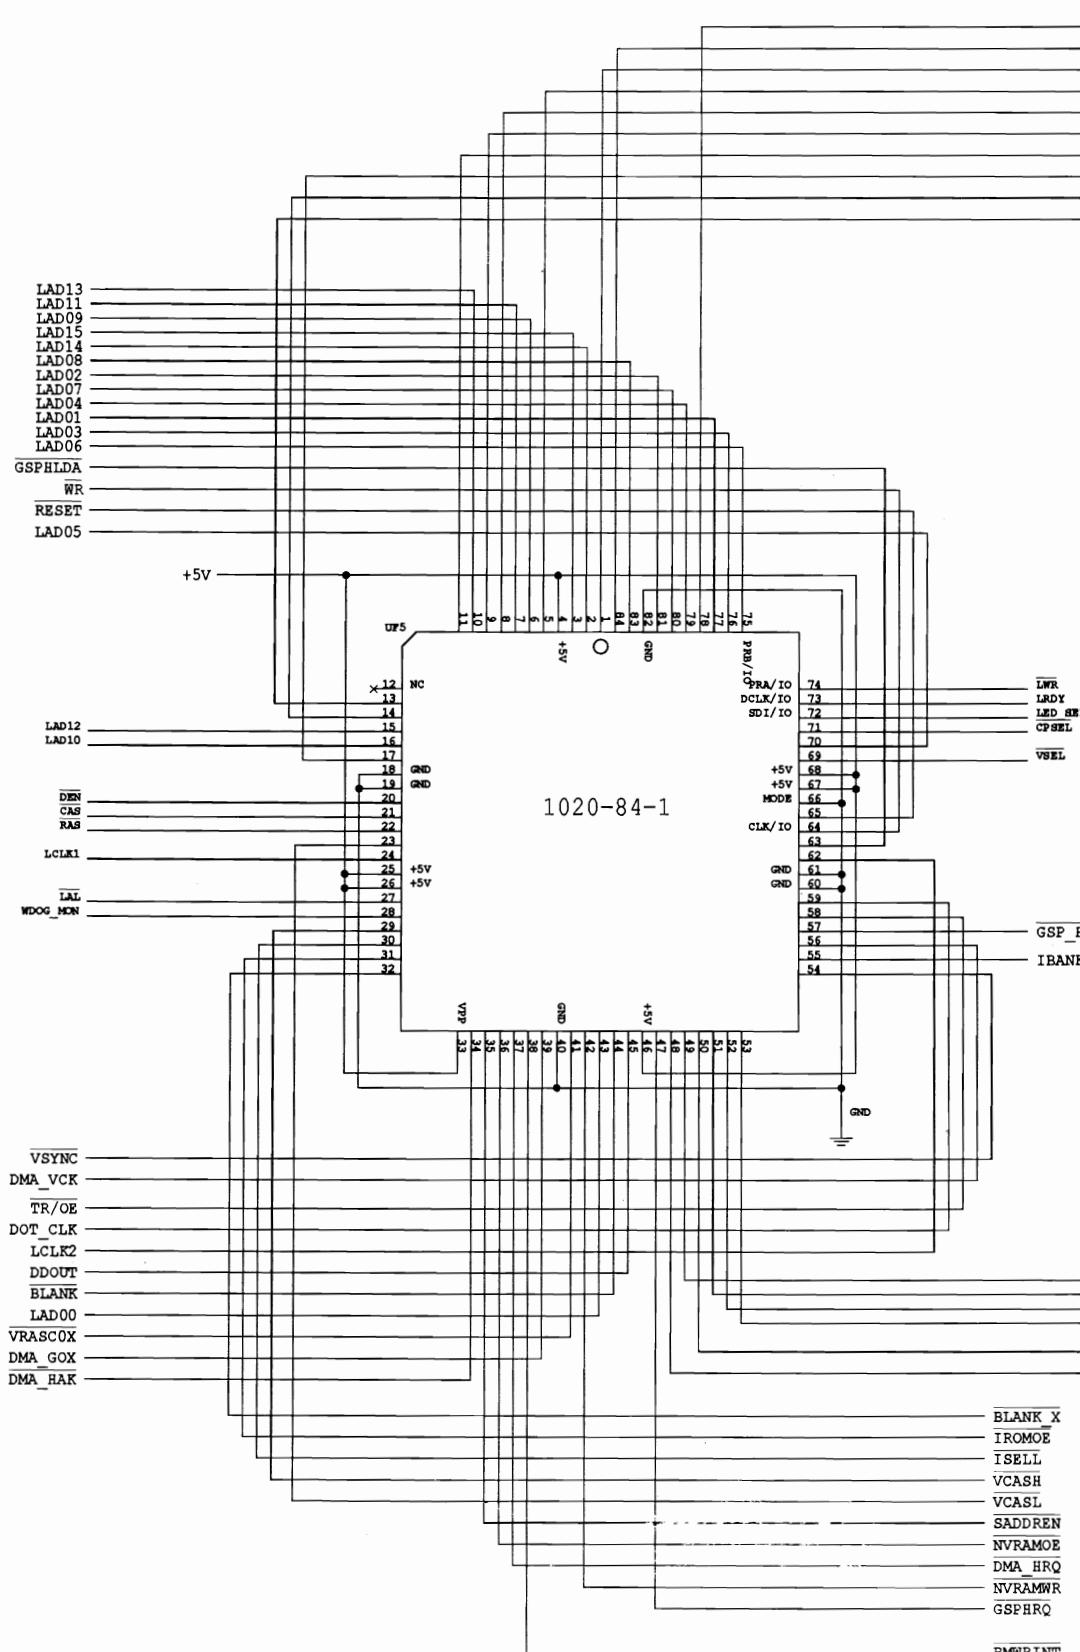

CPU BOARD  
Sheet 7 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.		
PROJECT ENG.	FIRST PROJ. NO.	DATE
REM	40023	09DEC92
DNW BY	DATE	FIRST USAGE DATE
REM	A-14816	09DEC92
CHECKED	DATE	CURRENT PROJECT DATE
REM	40023	19AUG93
APPROVED	DATE	07
	07	OF 22
	16-9470	REV. 5

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

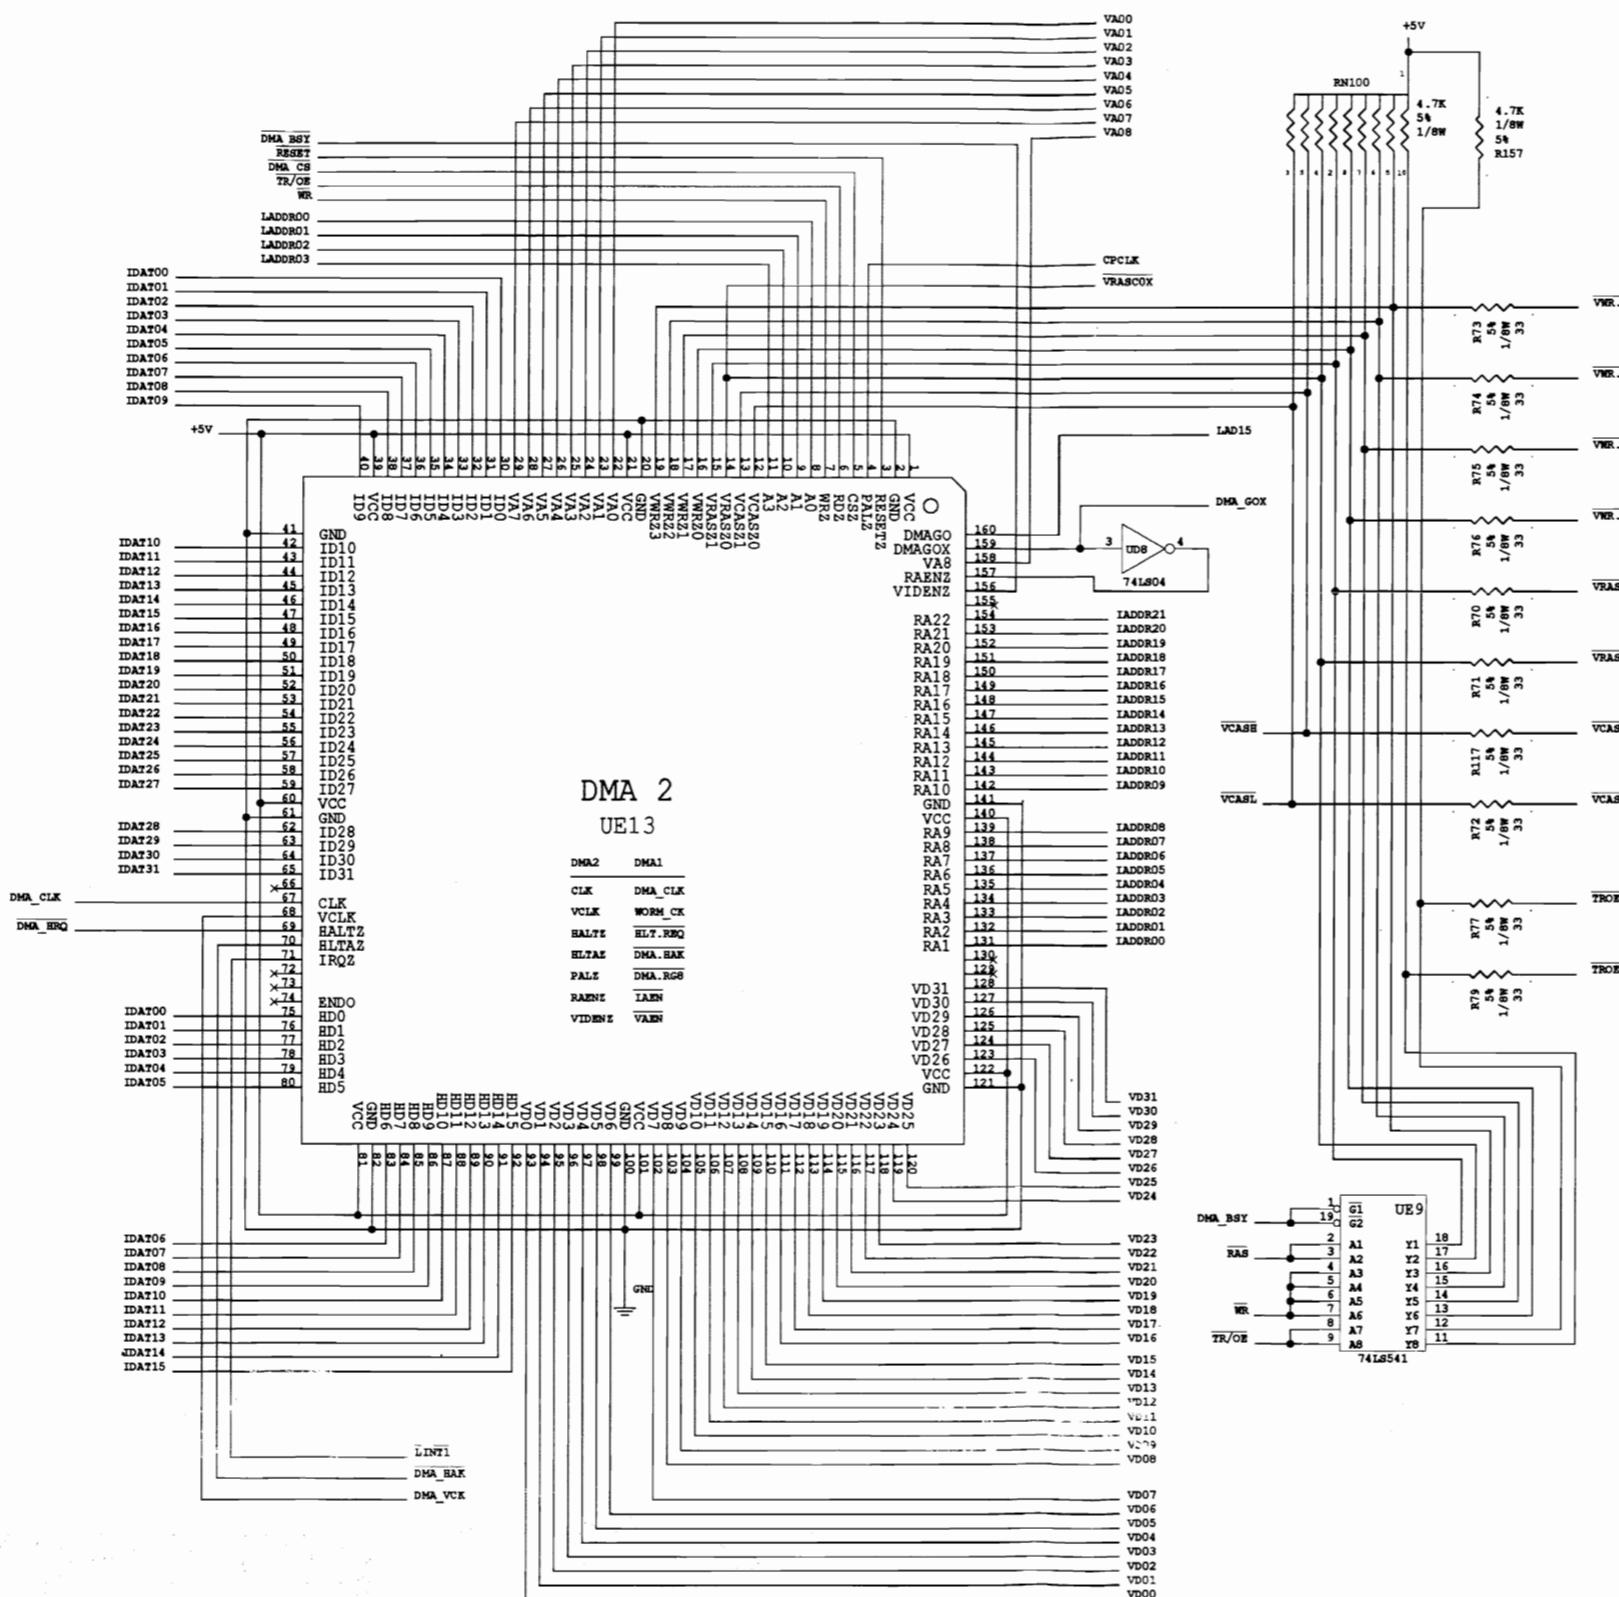

CPU BOARD  
Sheet 8 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DRAWN BY	FIRST USAGE DATE	DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	DMA
REM	40023	19AUG93	
APPROVED	DATE	SHEET	PART NO. 16-9470
		08	REV. 5
		OF	
		22	

1

2

3

4

5

6

7

8

3-12

1

2

3


4

5

6

7

8

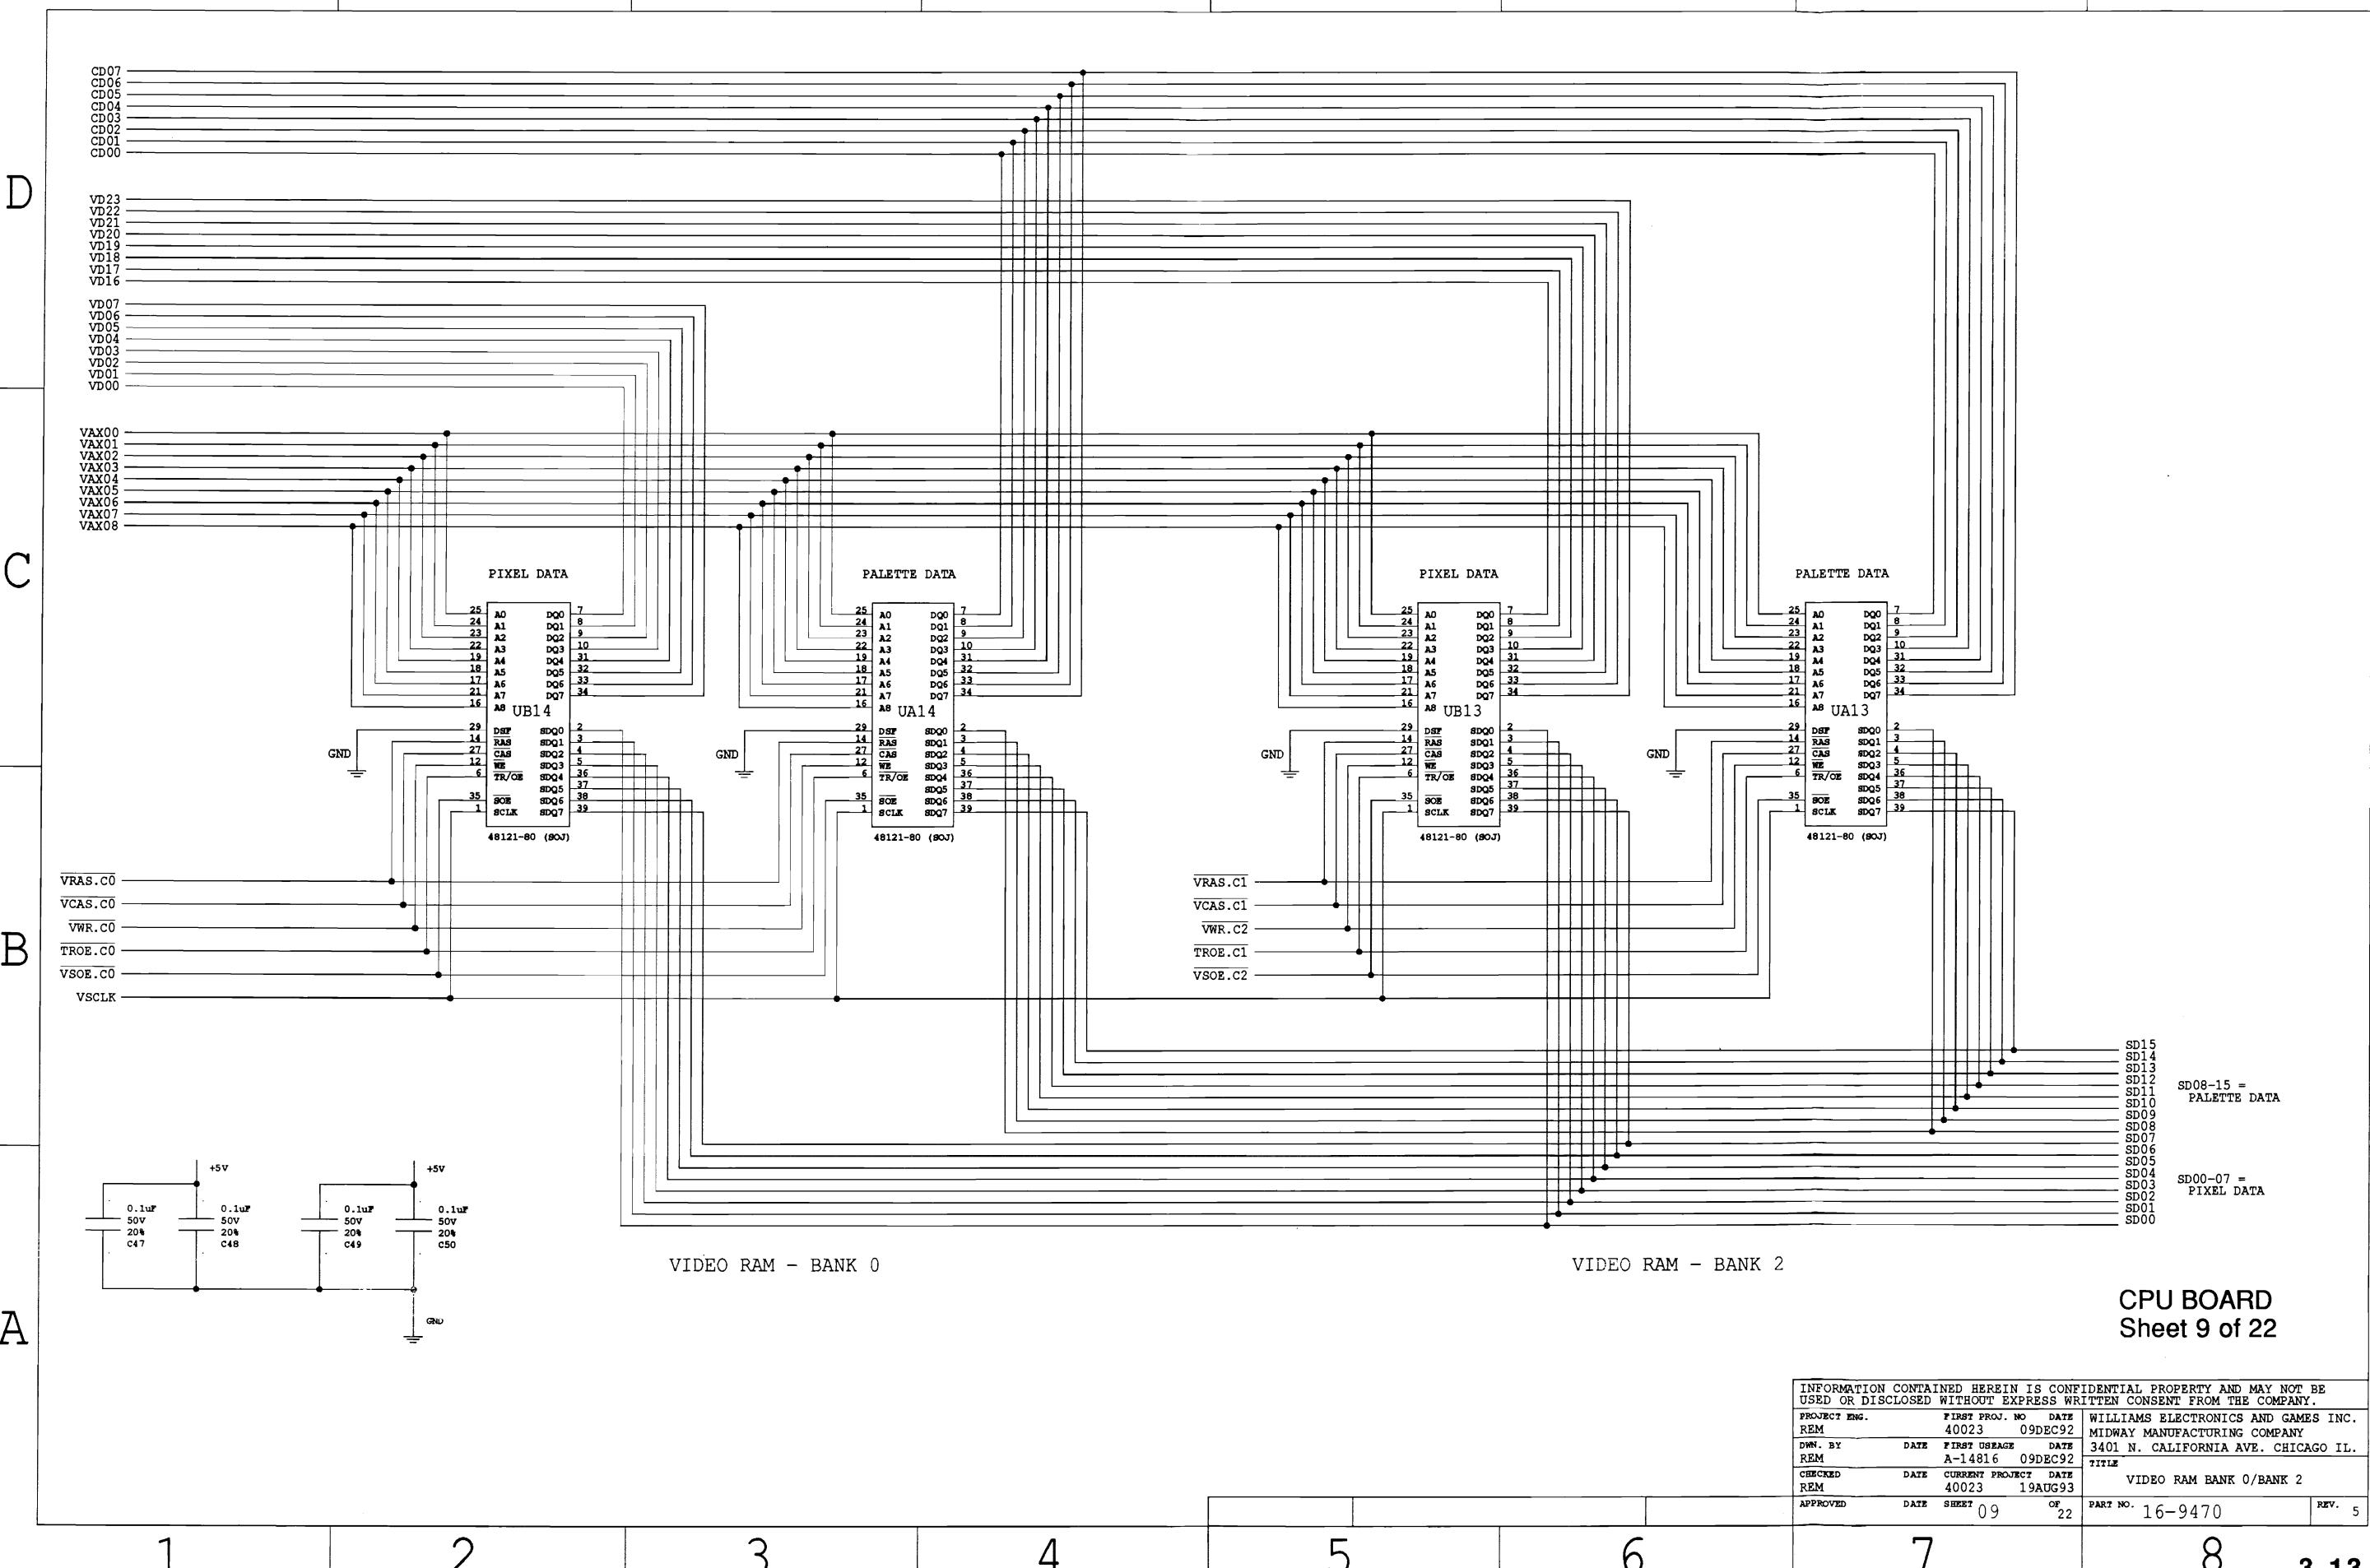

1

2

3

4

5

6

7

8

3-13

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

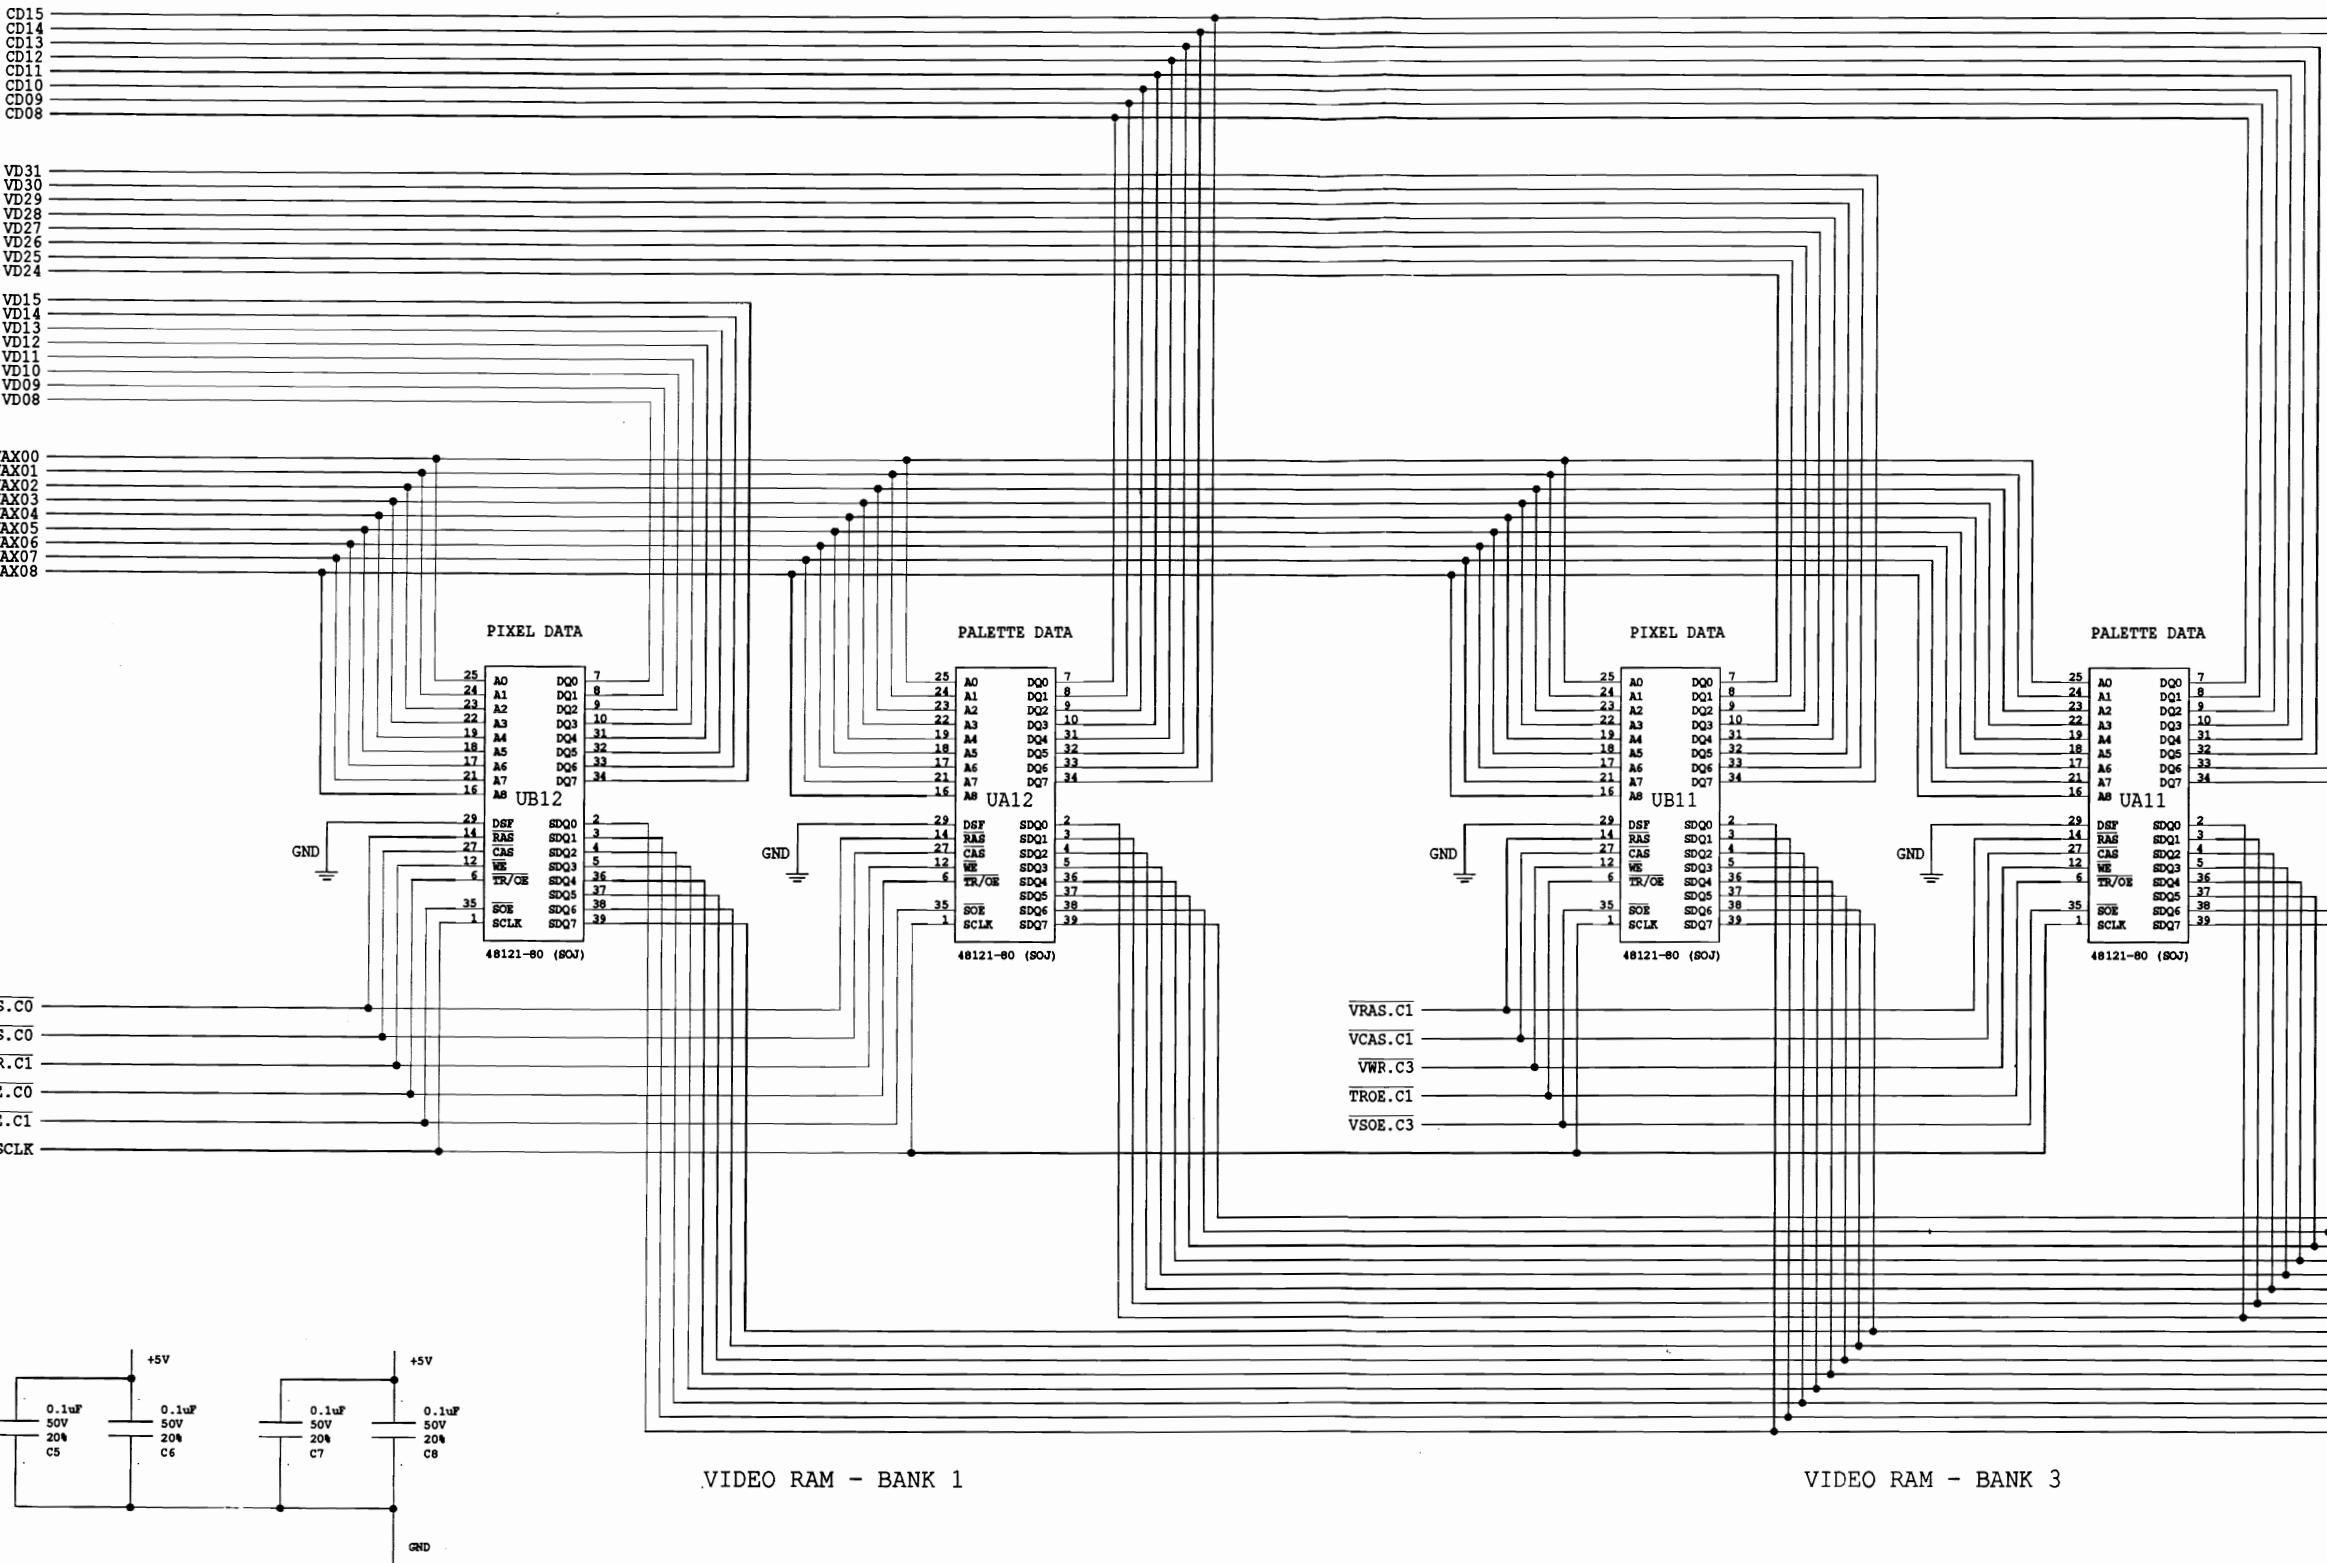CPU BOARD  
Sheet 10 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.					
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.		
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY		
DWN. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.		
REM	A-14816	09DEC92	TITLE		
CHECKED	DATE	CURRENT PROJECT DATE	VIDEO RAM BANK 1/BANK 3		
REM	40023	19AUG93			
APPROVED	DATE	SHEET 10 OF 22	PART NO. 16-9470	REV. 5	

1

2

3

4

5

6

7

8

3-14

1

2

3

4

5

6

7

8

D

D

C

C

B

B

A



A

BANK 0

BANK 1

CPU BOARD  
Sheet 11 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DRN. BY	DATE	FIRST USAGE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	IMAGE ROM BANK 0/BANK 1
REM	40023	19AUG93	
APPROVED	DATE	SHEET 11 OF 22	PART NO. 16-9470 REV. 5

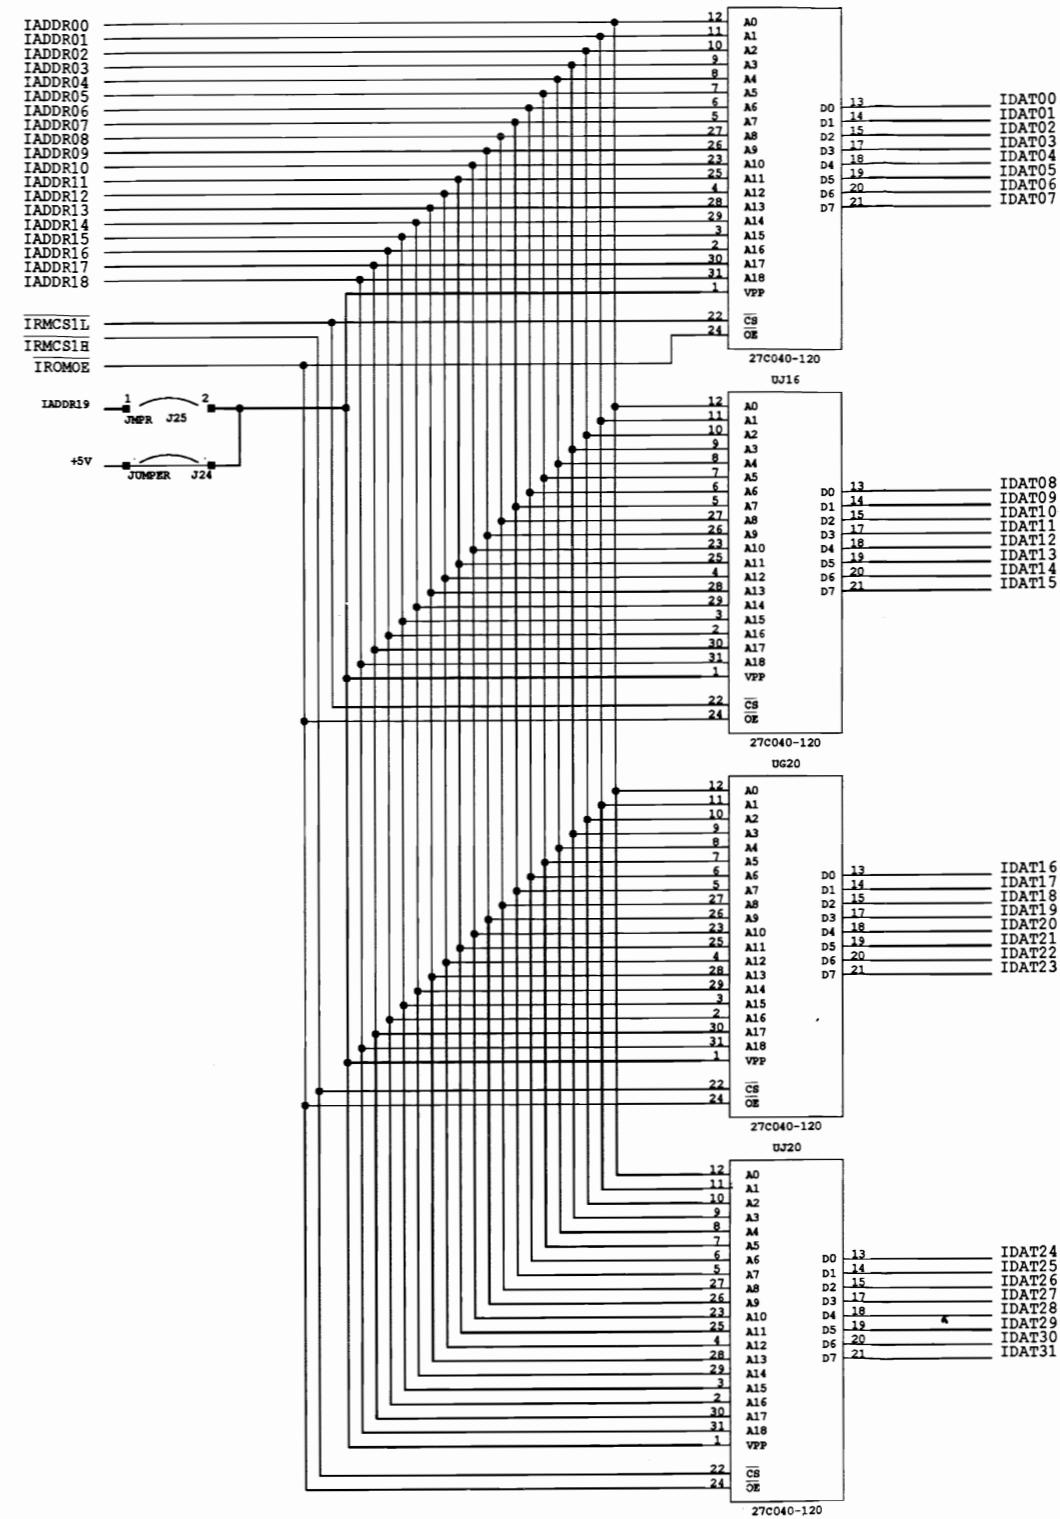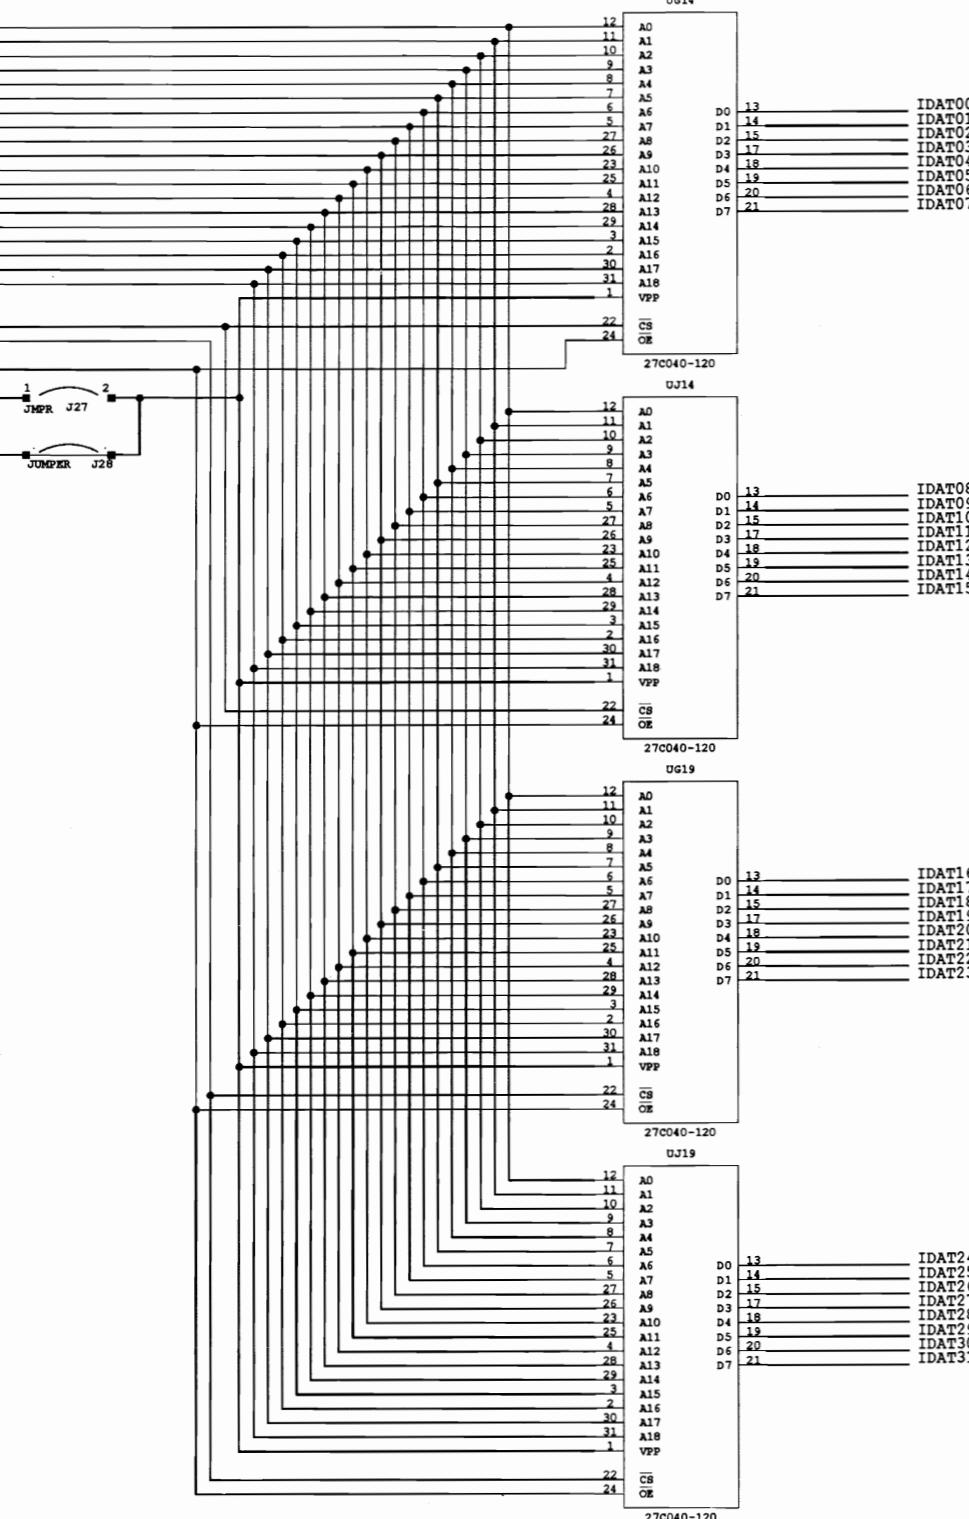

1

2

3

4

5

6

7

8

3-15

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

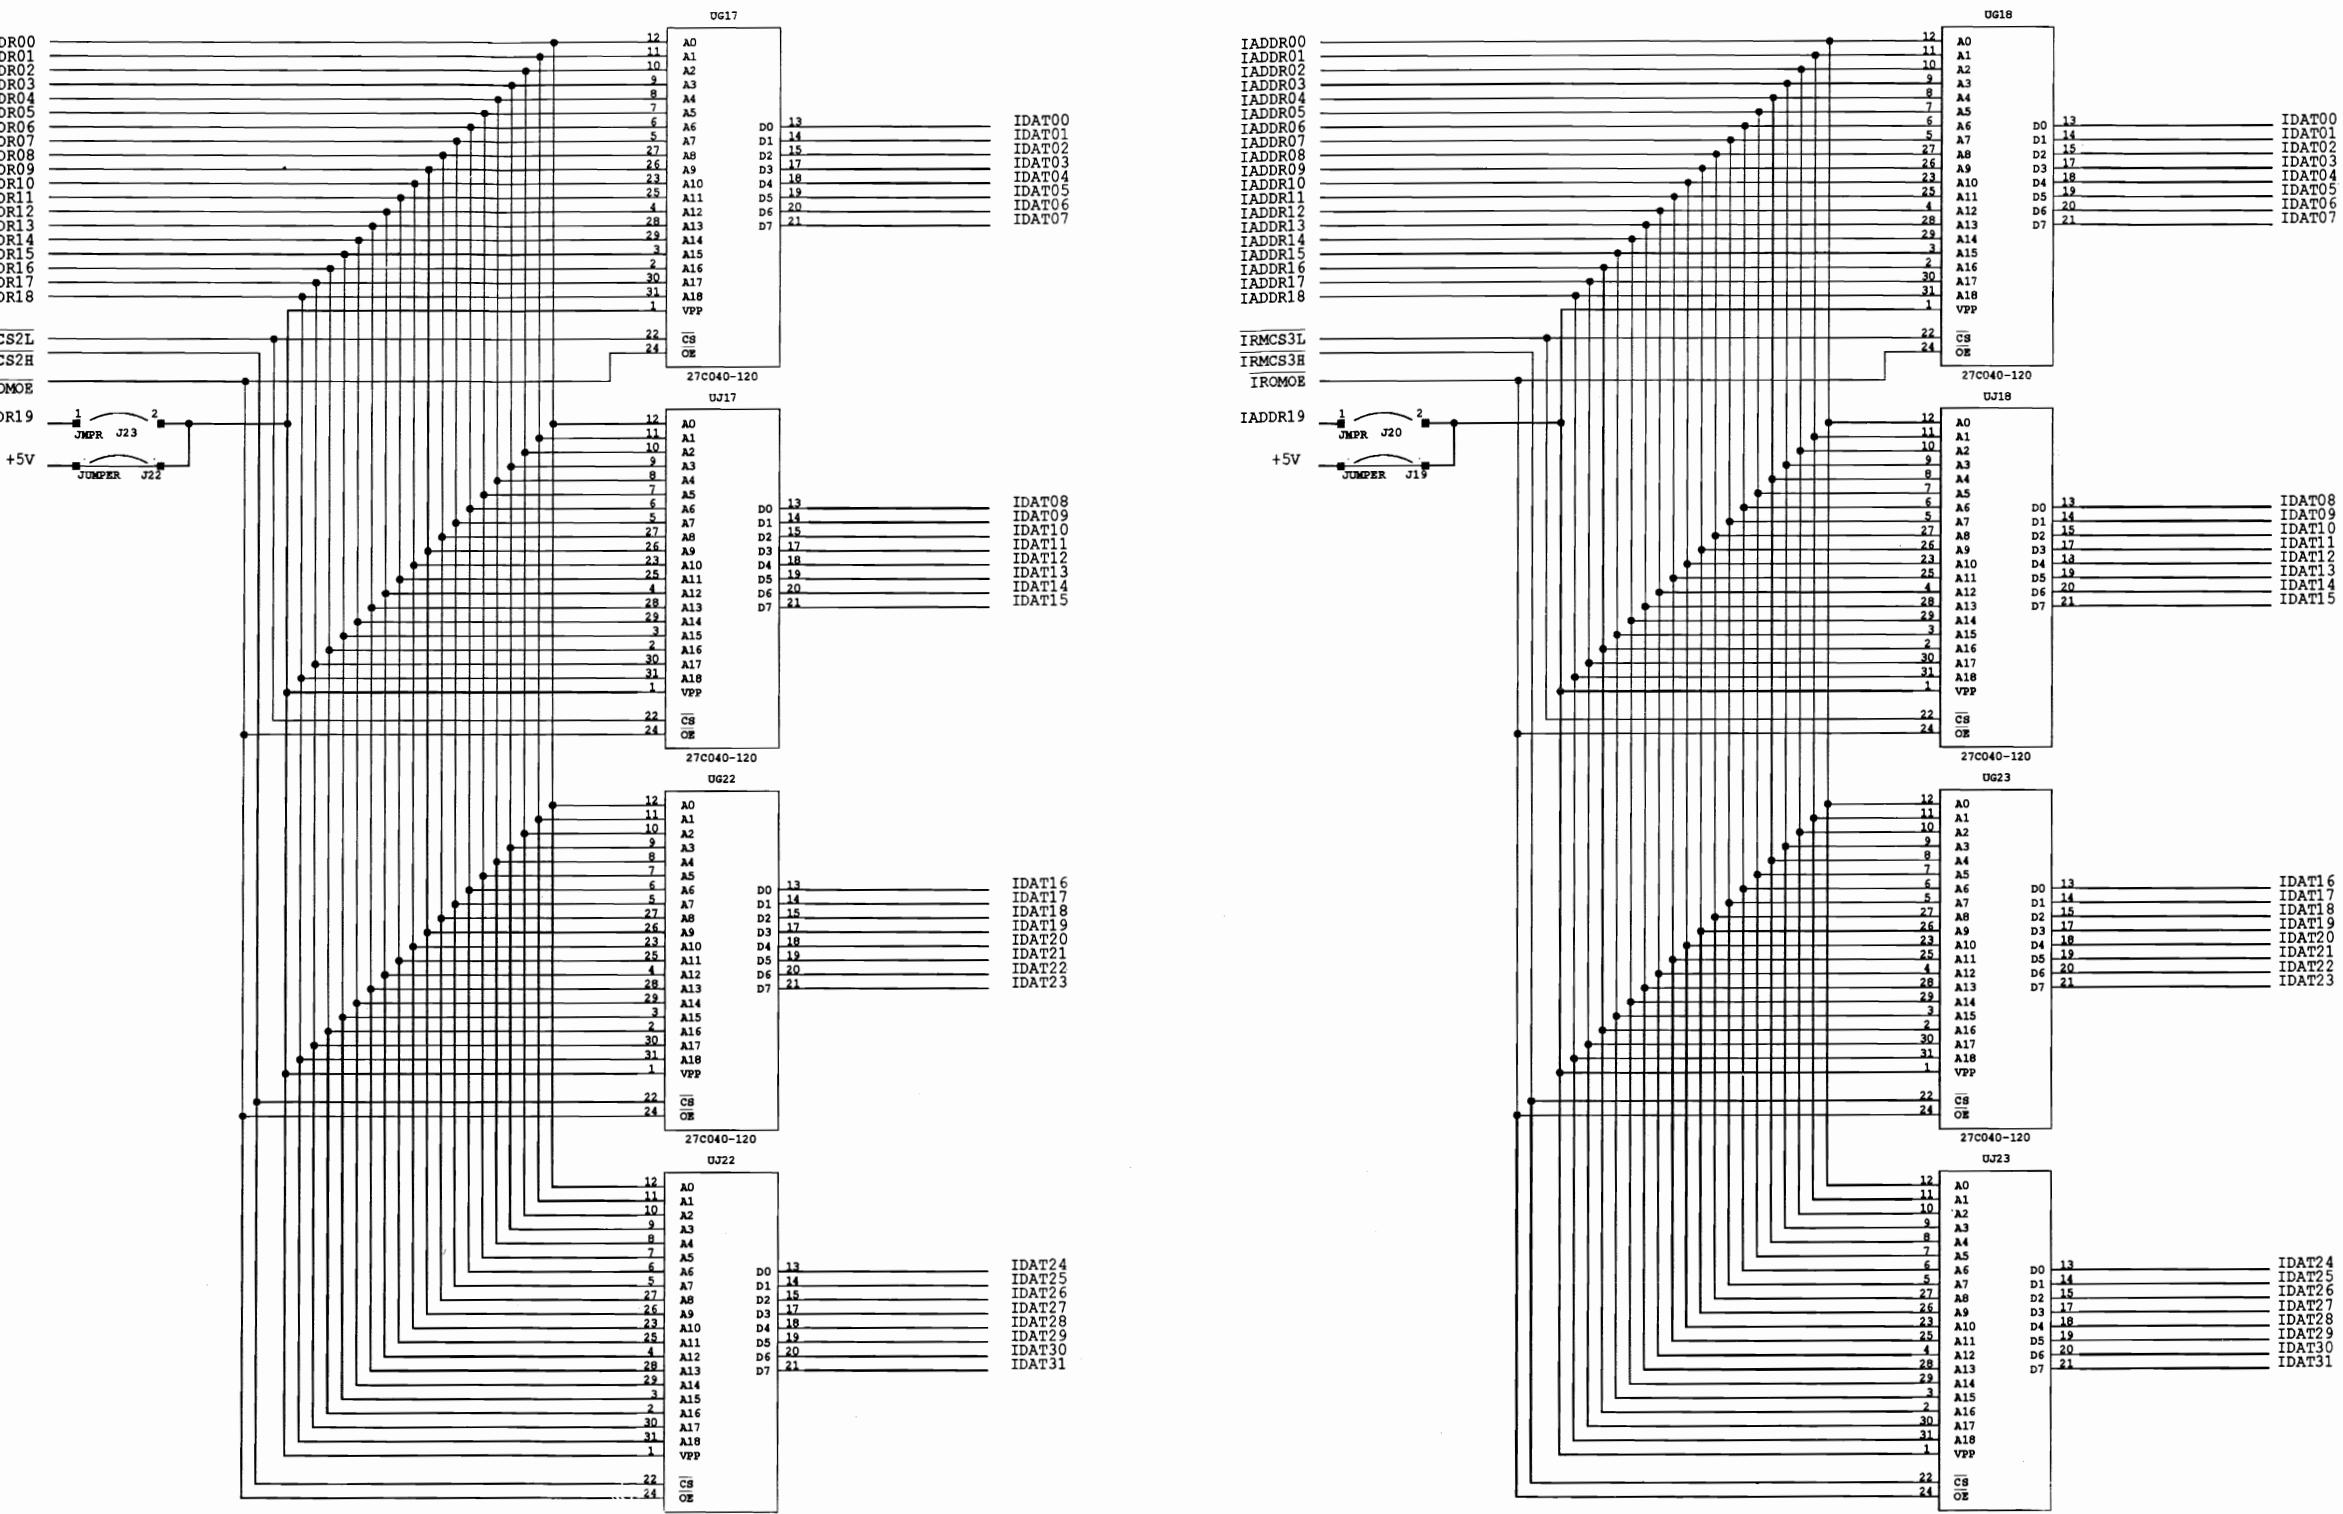

BANK 2

BANK 3

CPU BOARD  
Sheet 12 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DWN. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	IMAGE ROM BANK 2/BANK 3
REM	40023	19AUG93	
APPROVED	DATE	SHEET 12 OF 22	PART NO. 16-9470 REV. 5

1

2

3

4

5

6

7

8

3-16

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

D

D

C


C

B

B

A

A

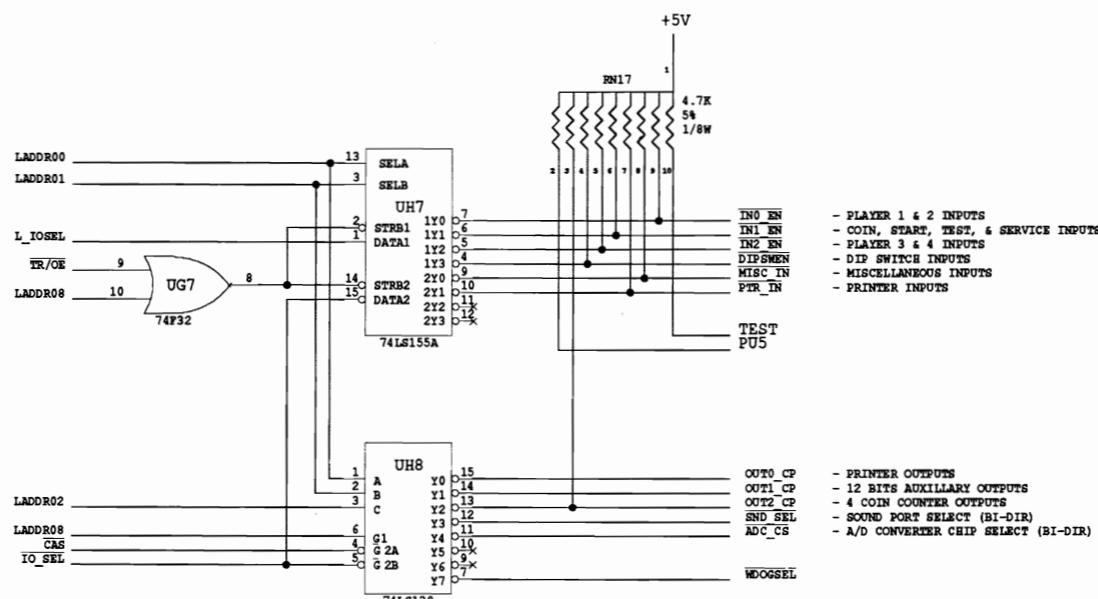

CPU BOARD  
Sheet 13 of 22

19 AUG. 1993 REM - CHANGED UG7 74LS32 TO 74F32.

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DNW. BY	DATE	FIRST USEAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	I/O DECODING
REM	40023	19AUG93	
APPROVED	DATE	SHEET 13 OF 22	PART NO. 16-9470
			REV. 5

1

2

3

4

5

6


7

8


3-17

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8


D

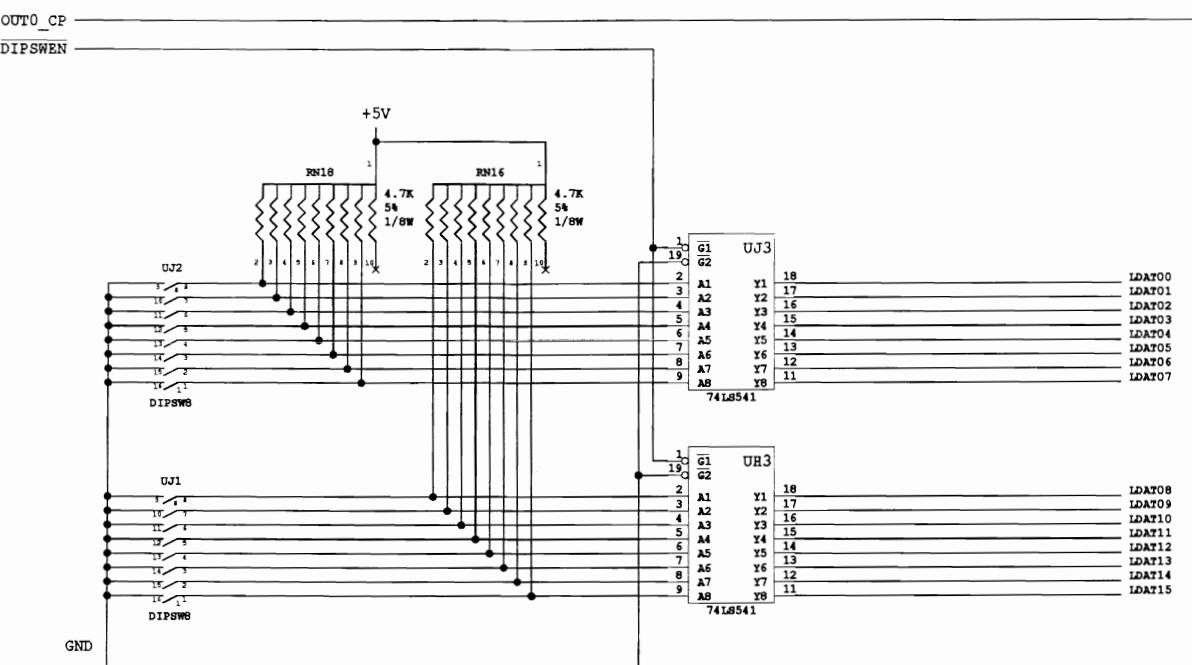


C

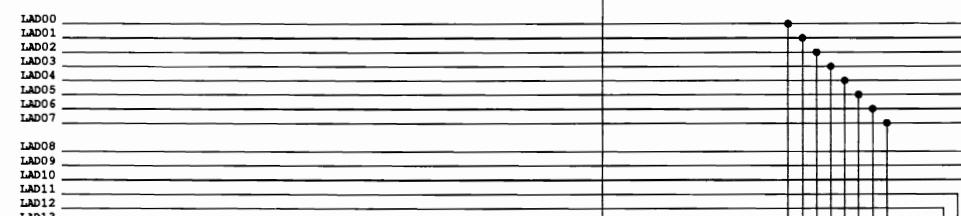

B

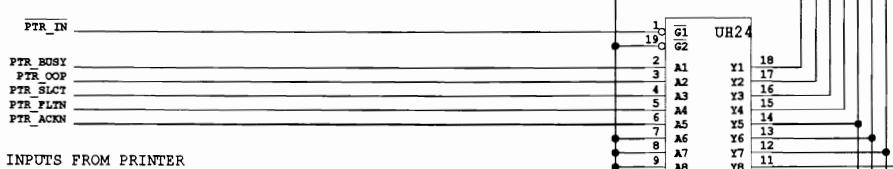

A

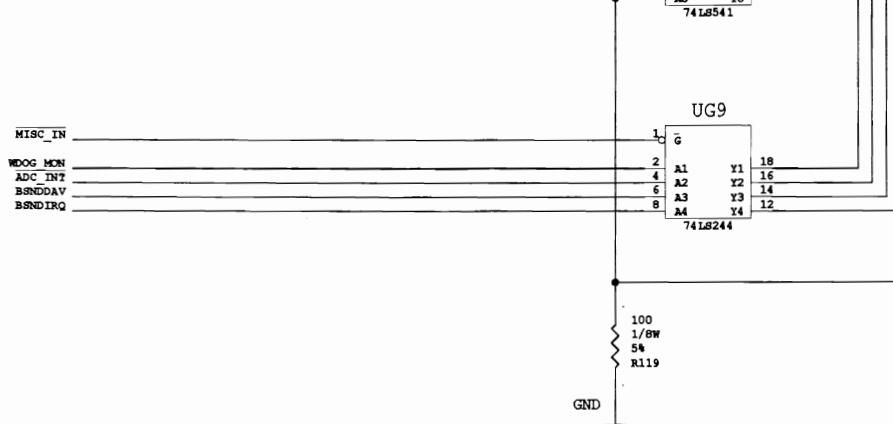

1

2

3

4


5

6

7

8

3-18

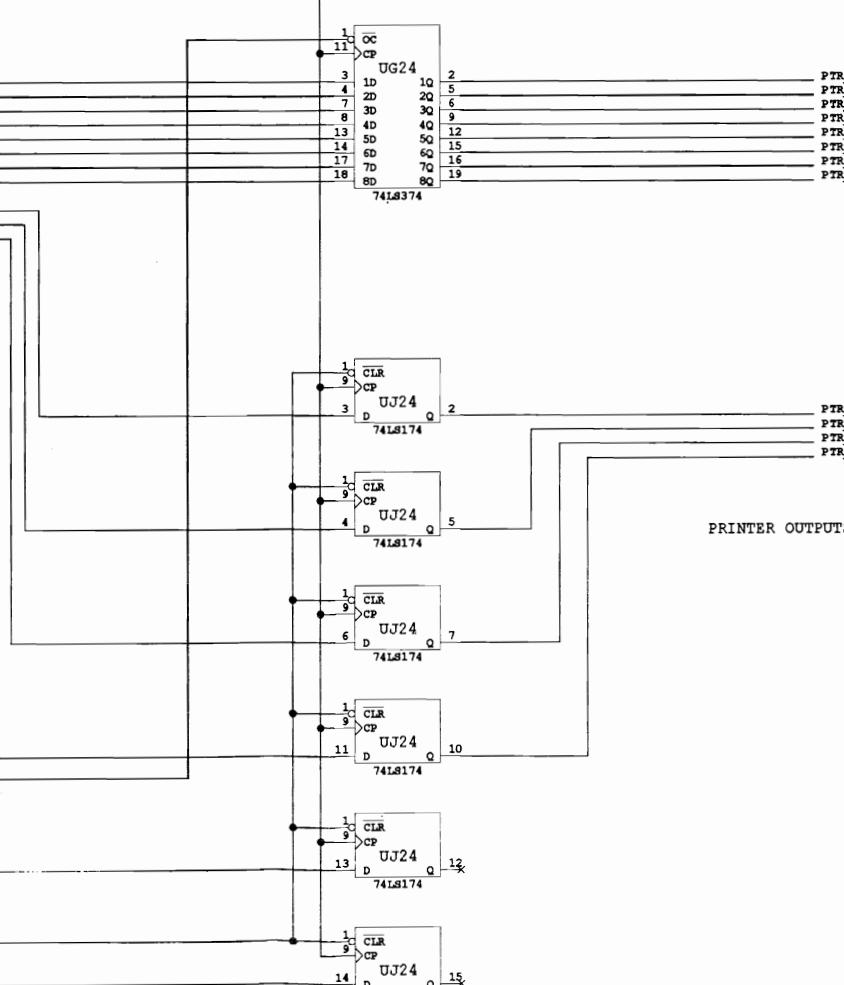

CPU BOARD  
Sheet 14 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DWN. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	MISC. I/O AND DIP SWITCH
REM	40023	19AUG93	PART NO. 16-9470
APPROVED	DATE	SHEET 14 OF 22	REV. 5

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

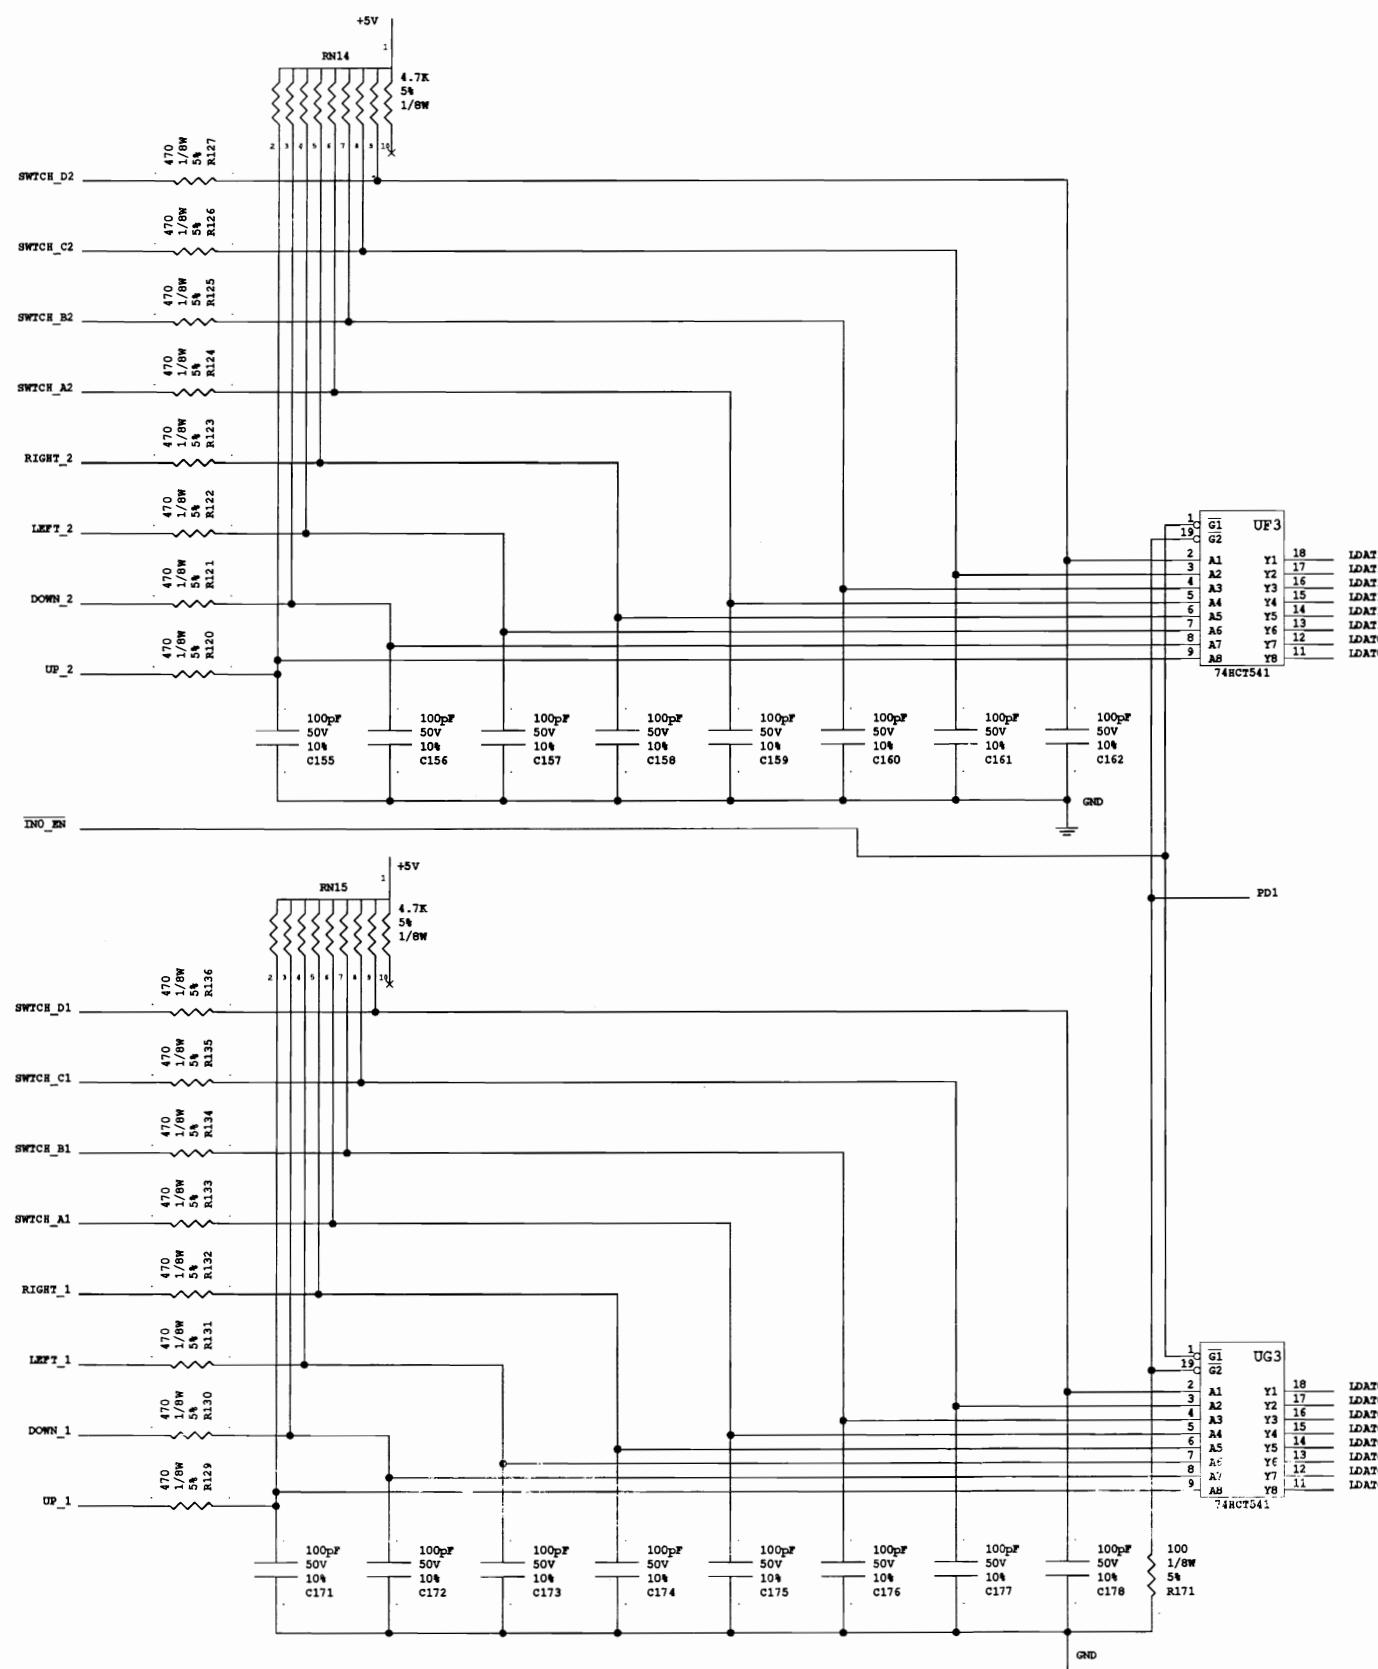

CPU BOARD  
Sheet 15 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DOWN. BY	DATE	FIRST USAGE DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	DATE	CURRENT PROJECT DATE	PLAYER 1/PLAYER 2 INPUTS
REM	40023	19AUG93	
APPROVED	DATE	SHEET 15 OF 22	PART NO. 16-9470 REV. 5

1

2

3

4

5

6

7

8

3-19

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

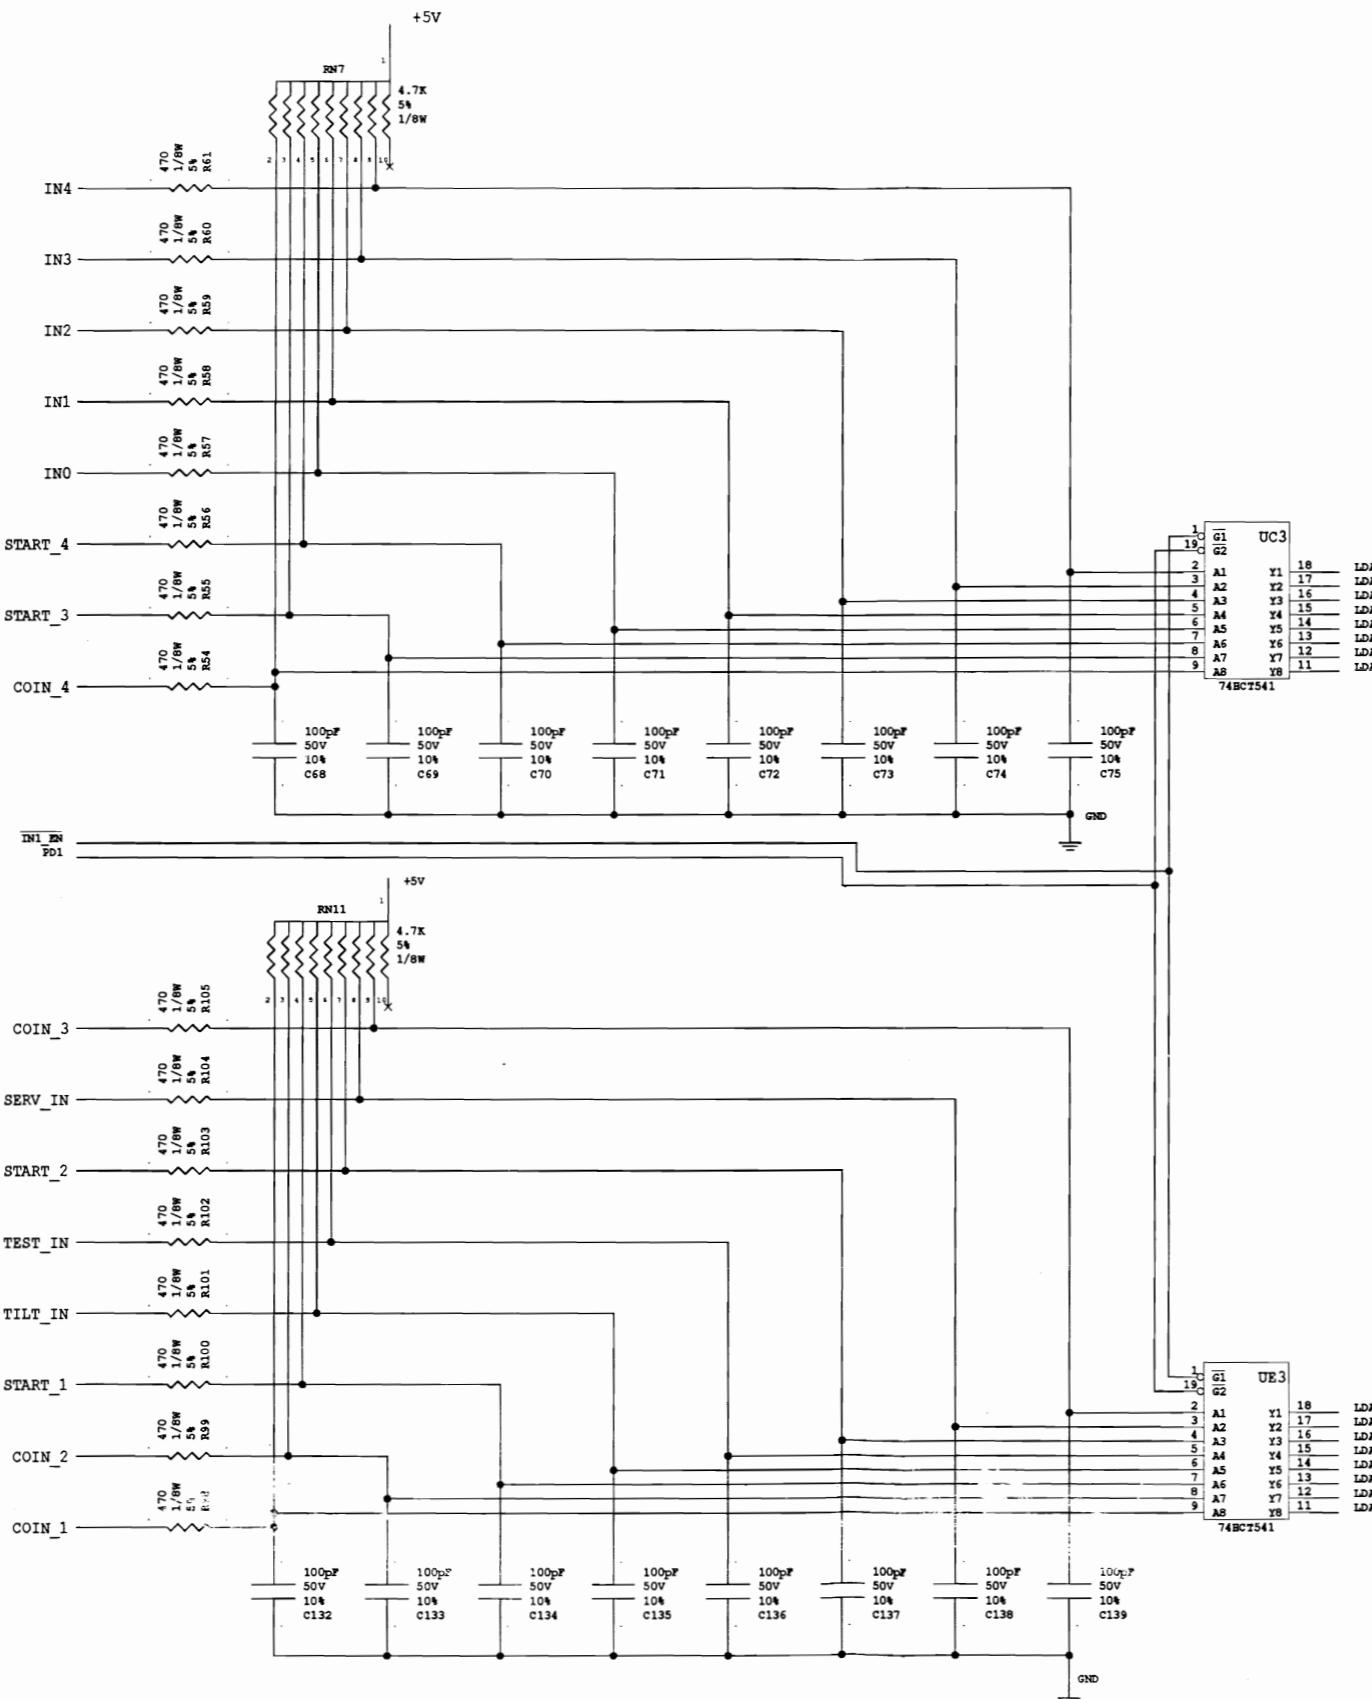

CPU BOARD  
Sheet 16 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.					
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.	REM	40023 09DEC92
DRAWN BY	FIRST USAGE	DATE	MIDWAY MANUFACTURING COMPANY	REM	A-14816 09DEC92
REMOVED	DATE	DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.	TITLE	EXTRA INPUTS/COIN/START
CHECKED	CURRENT PROJECT	DATE		REMOVED	40023 19AUG93
APPROVED	DATE	SHEET	PART NO.	REV.	16-9470 5
		16	16	OF	22

1

2

3

4

5

6

7

8

3-20

1

2

3

4

5

6

7

8

D

D

C

C

B

B

A

A

CPU BOARD  
Sheet 17 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.					
PROJECT ENG. REM	FIRST PROJ. NO 40023	DATE 09DEC92	WILLIAMS ELECTRONICS AND GAMES INC.		
DWN. BY REM	DATE A-14816	FIRST USAGE 09DEC92	MIDWAY MANUFACTURING COMPANY 3401 N. CALIFORNIA AVE. CHICAGO IL.		
CHECKED REM	DATE 40023	CURRENT PROJECT 19AUG93	DATE 19AUG93		
	APPROVED	DATE 17	SHEET OF 22	PART NO.	16-9470
				REV.	5

1

2

3

4


5

6

7

8

3-21

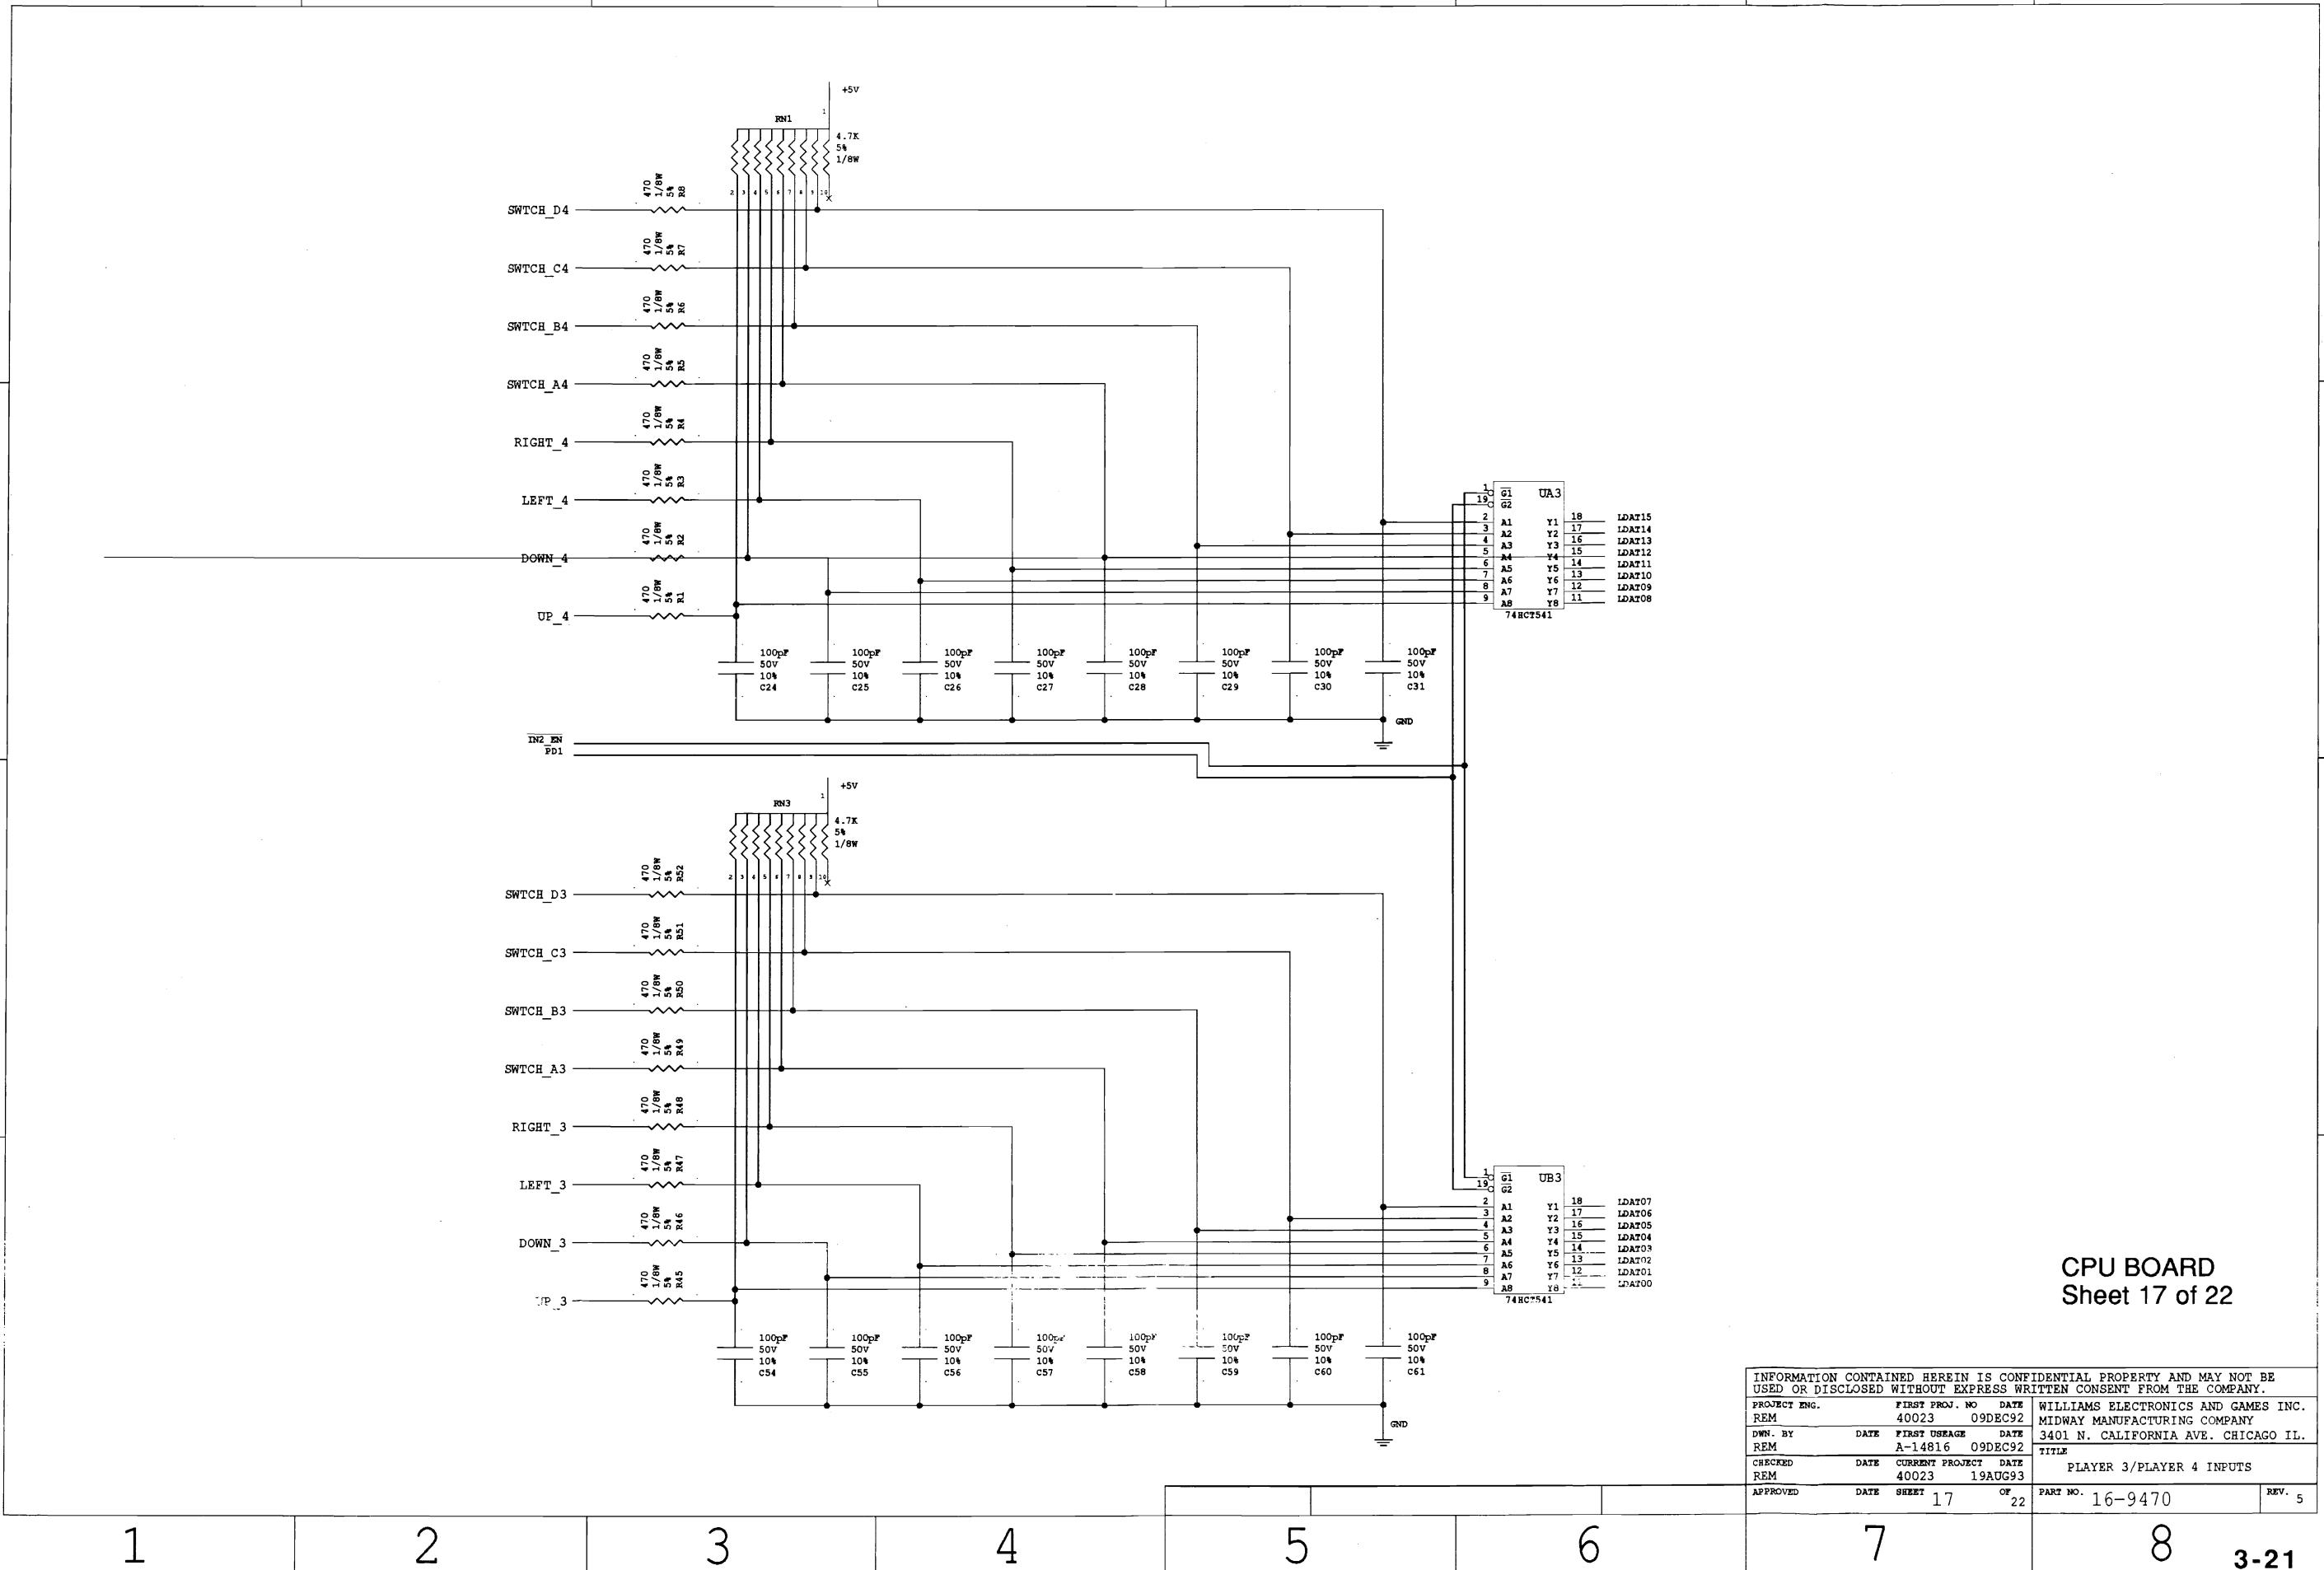

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

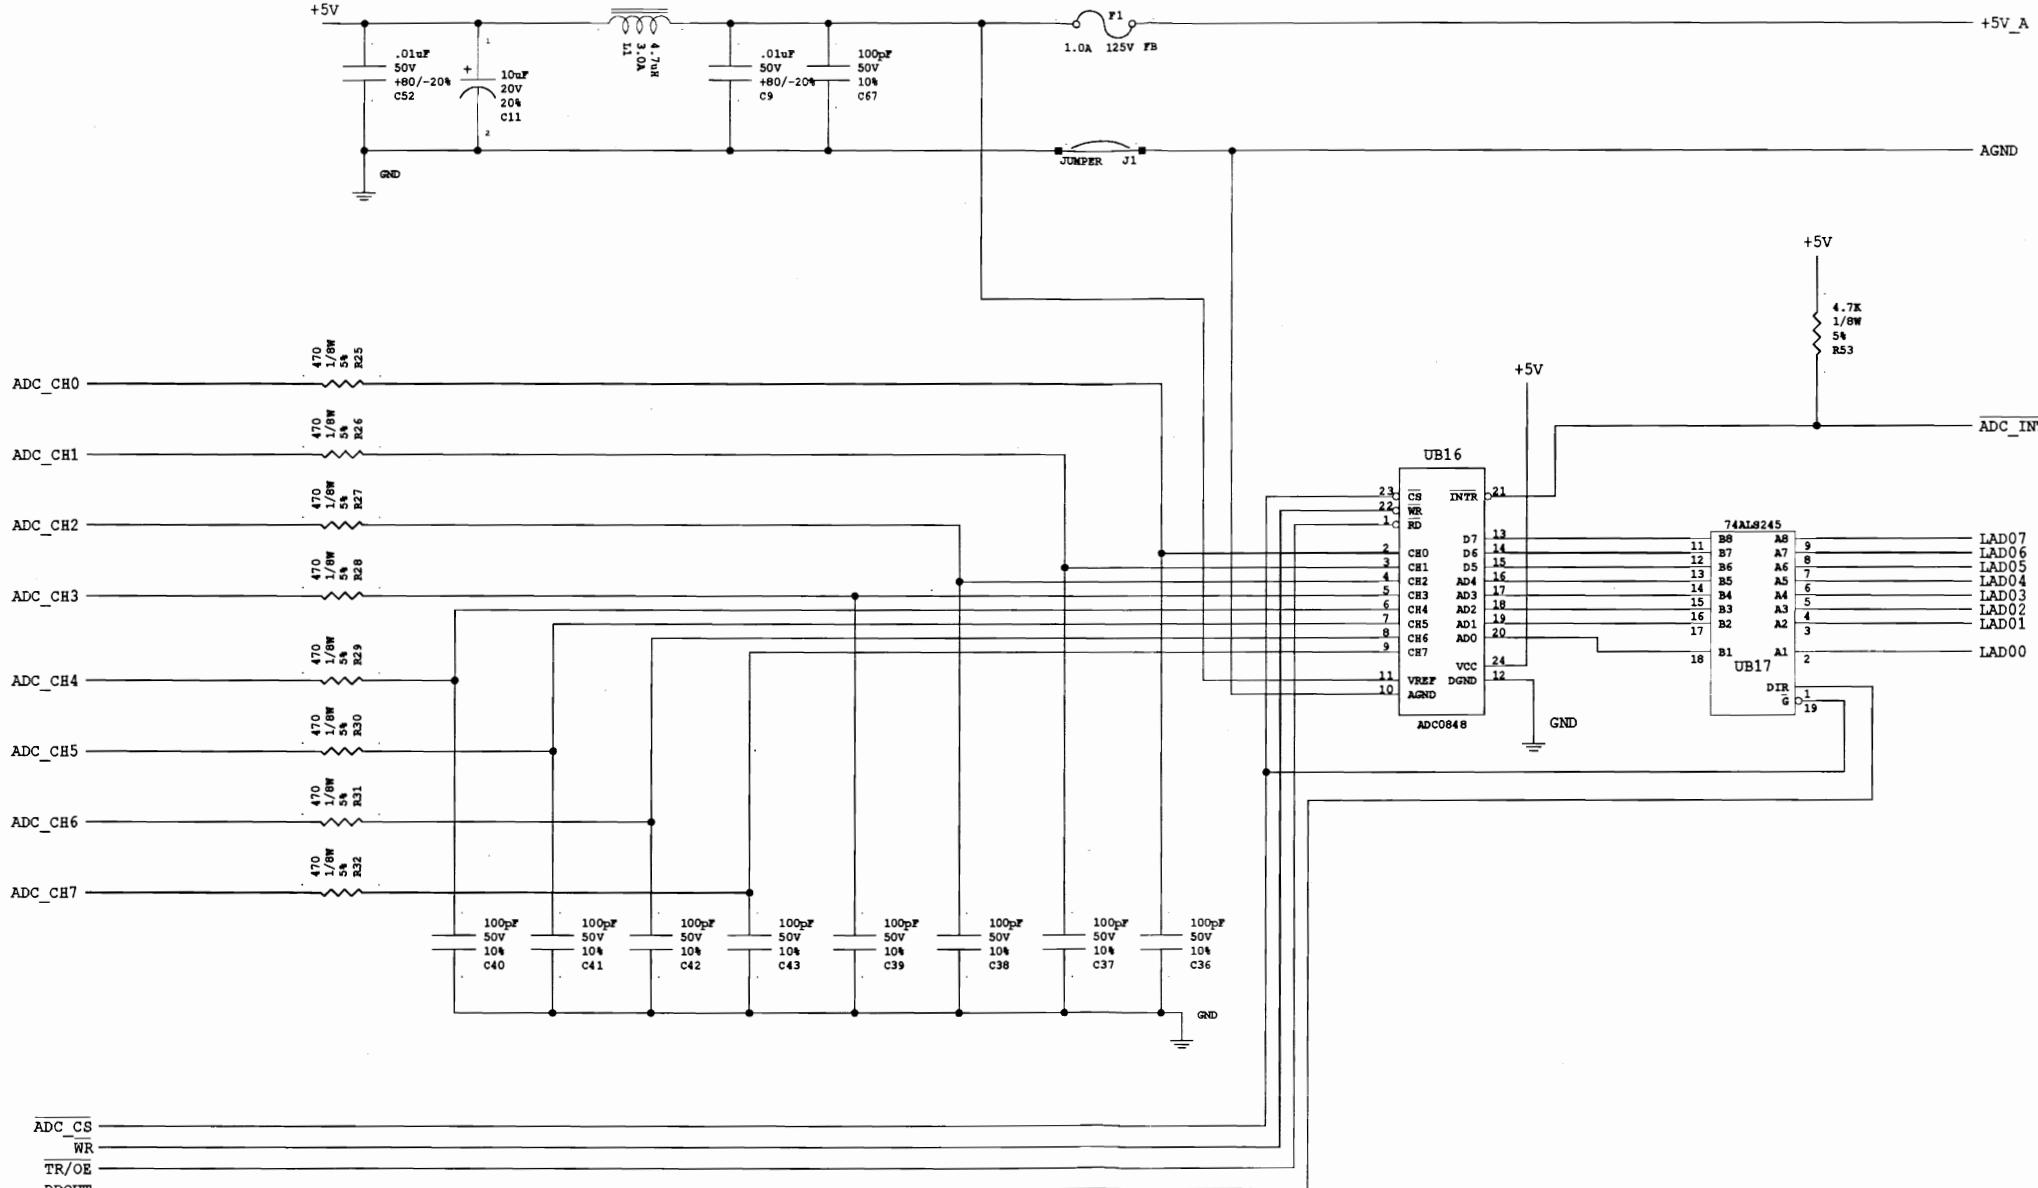

CPU BOARD  
Sheet 18 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.					
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.		
REM	40023	09DEC92	MIWAY MANUFACTURING COMPANY		
DWN. BY	DATE	FIRST USAGE	DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.	
REM	A-14816	09DEC92	TITLE	A/D	
CHECKED	DATE	CURRENT PROJECT	DATE		
REM	40023	19AUG93			
APPROVED	DATE	SHEET	OF	PART NO.	REV.
	18	18	22	16-9470	5

1

2

3

4

5


6

7

8

3-22

D

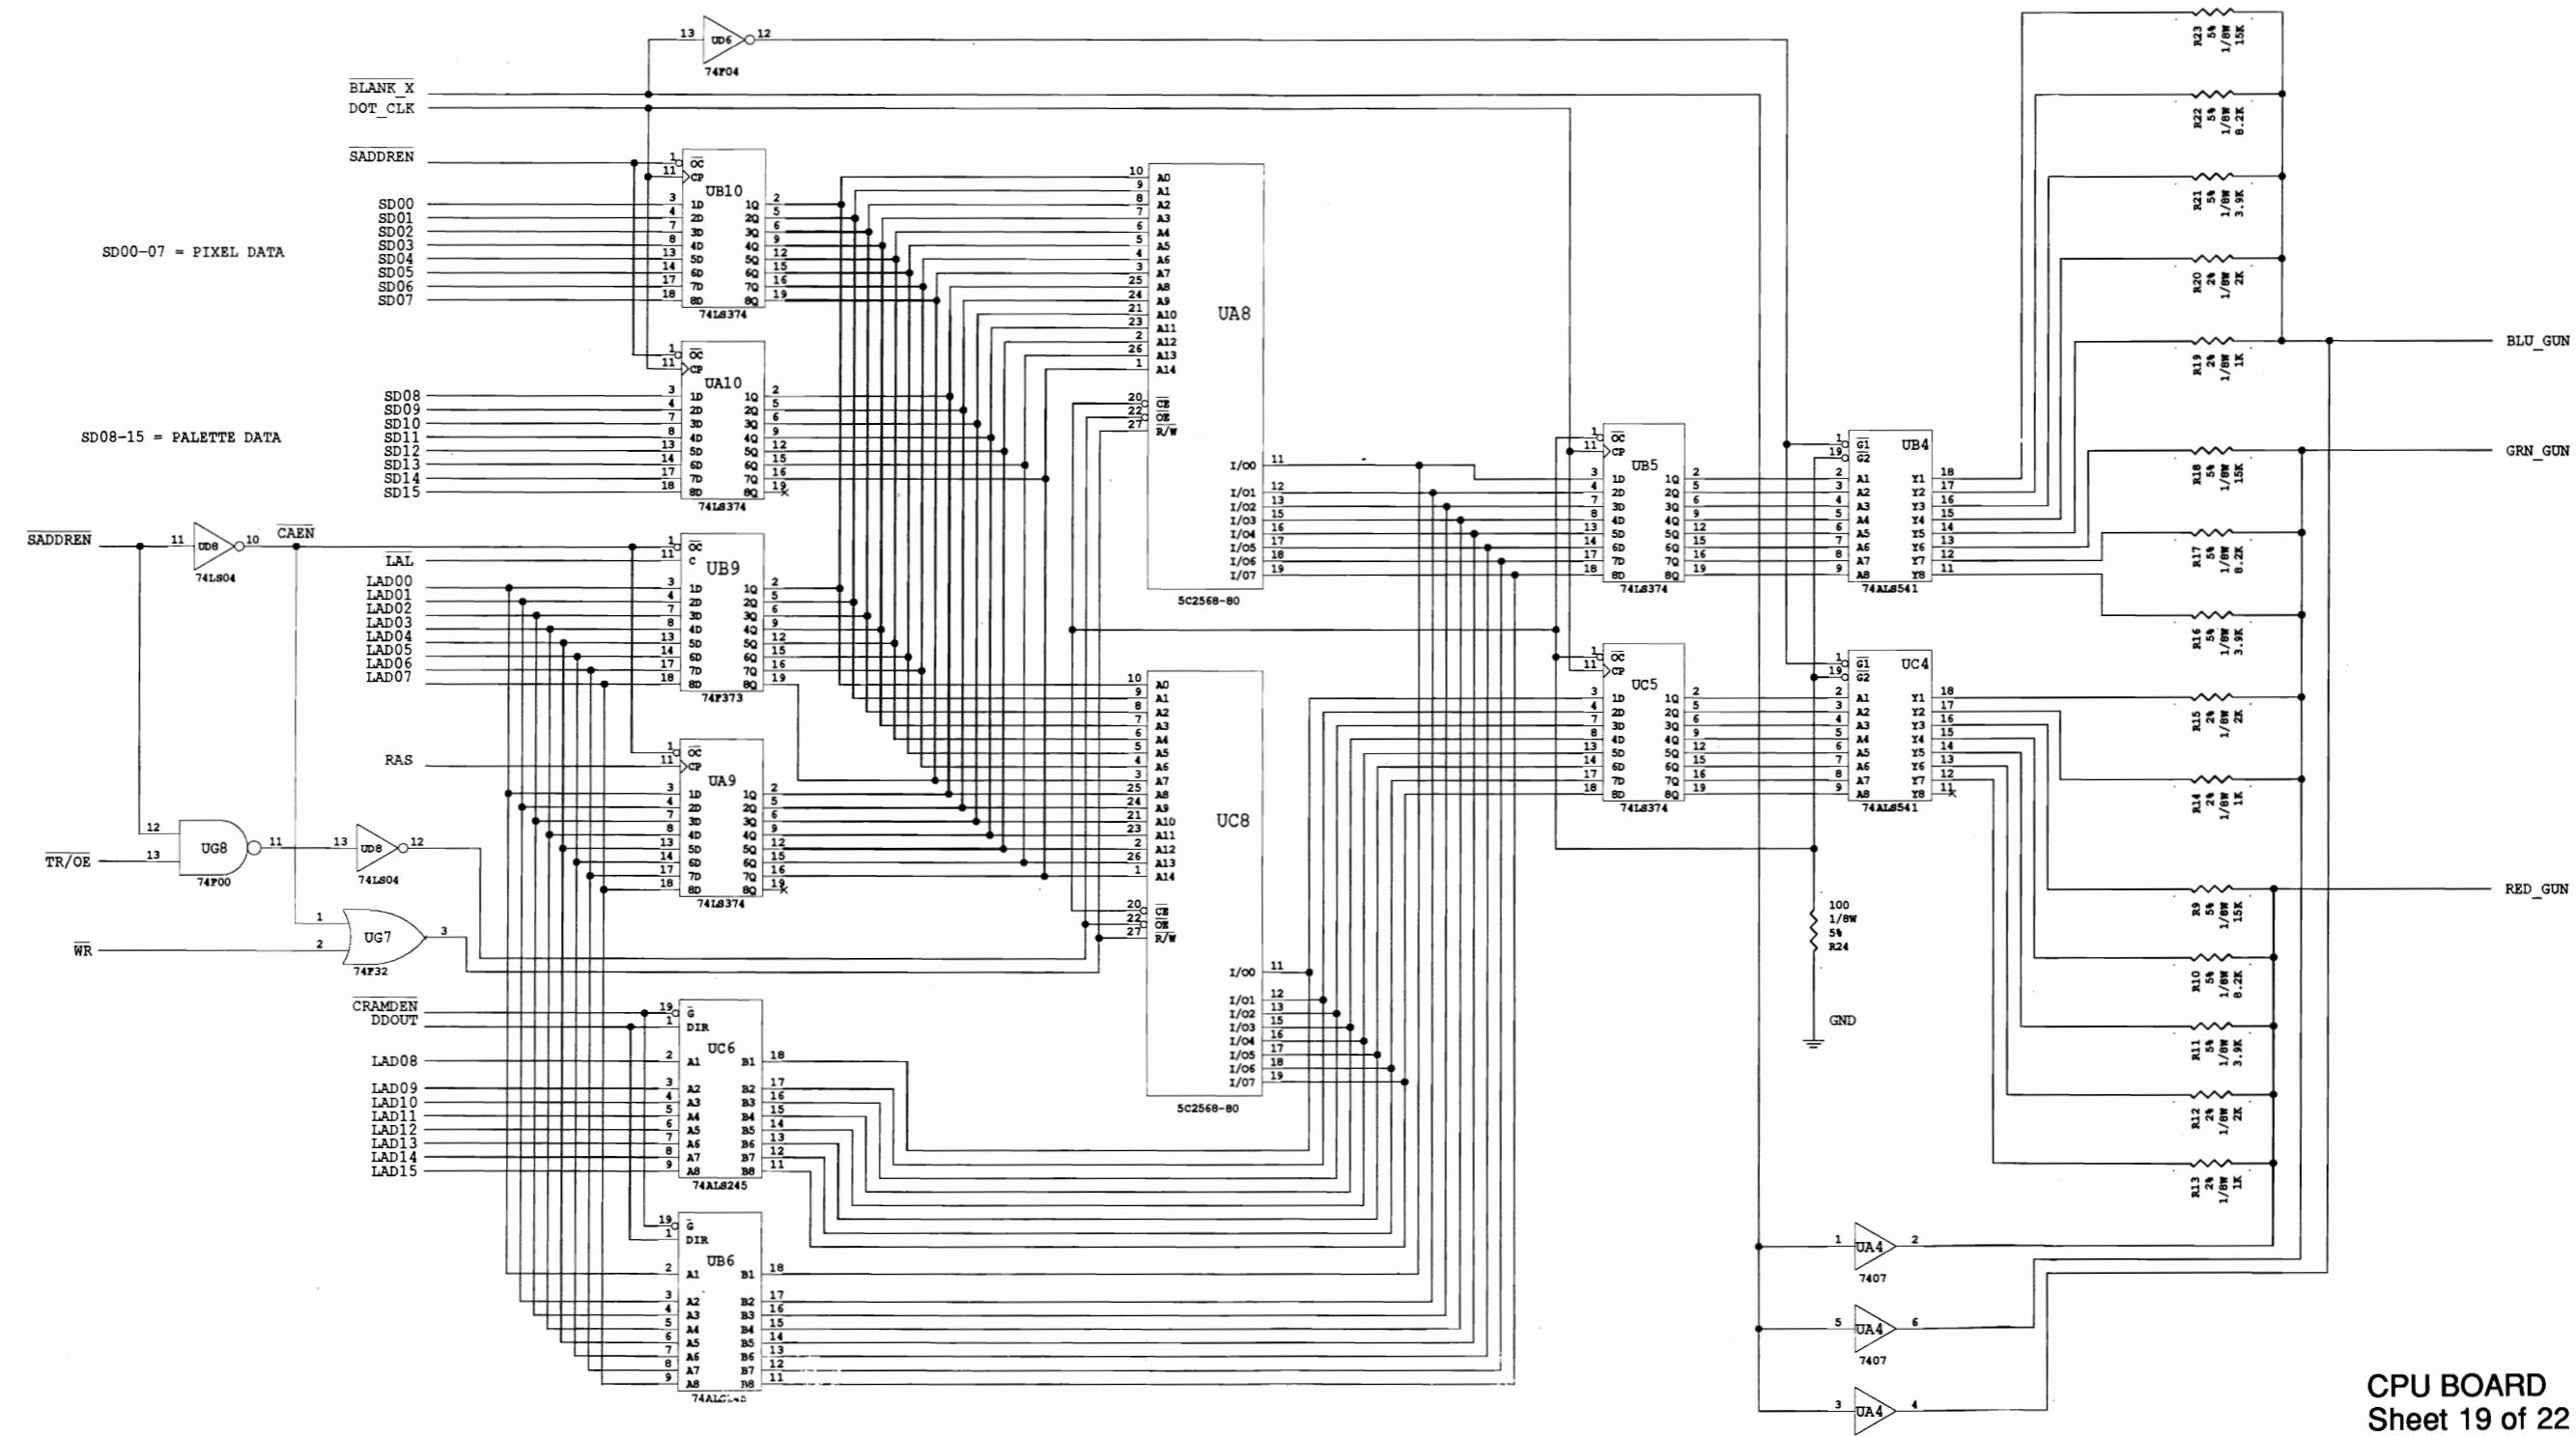

CPU BOARD  
Sheet 19 of 22

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.

PROJECT ENG. REM	FIRST PROJ. NO 40023	DATE 09DEC92	WILLIAMS ELECTRONICS AND GAMES INC.
DWN. BY REM	DATE A-14816	DATE 09DEC92	MIDWAY MANUFACTURING COMPANY
CHECKED REM	DATE 40023	DATE 19AUG93	3401 N. CALIFORNIA AVE. CHICAGO IL.
APPROVED REM	DATE 16-9470	OF REV. 5	TITLE RAMDAC

1

2

3

4

5

6

7

8

D

D

C


C

B

B

A

A

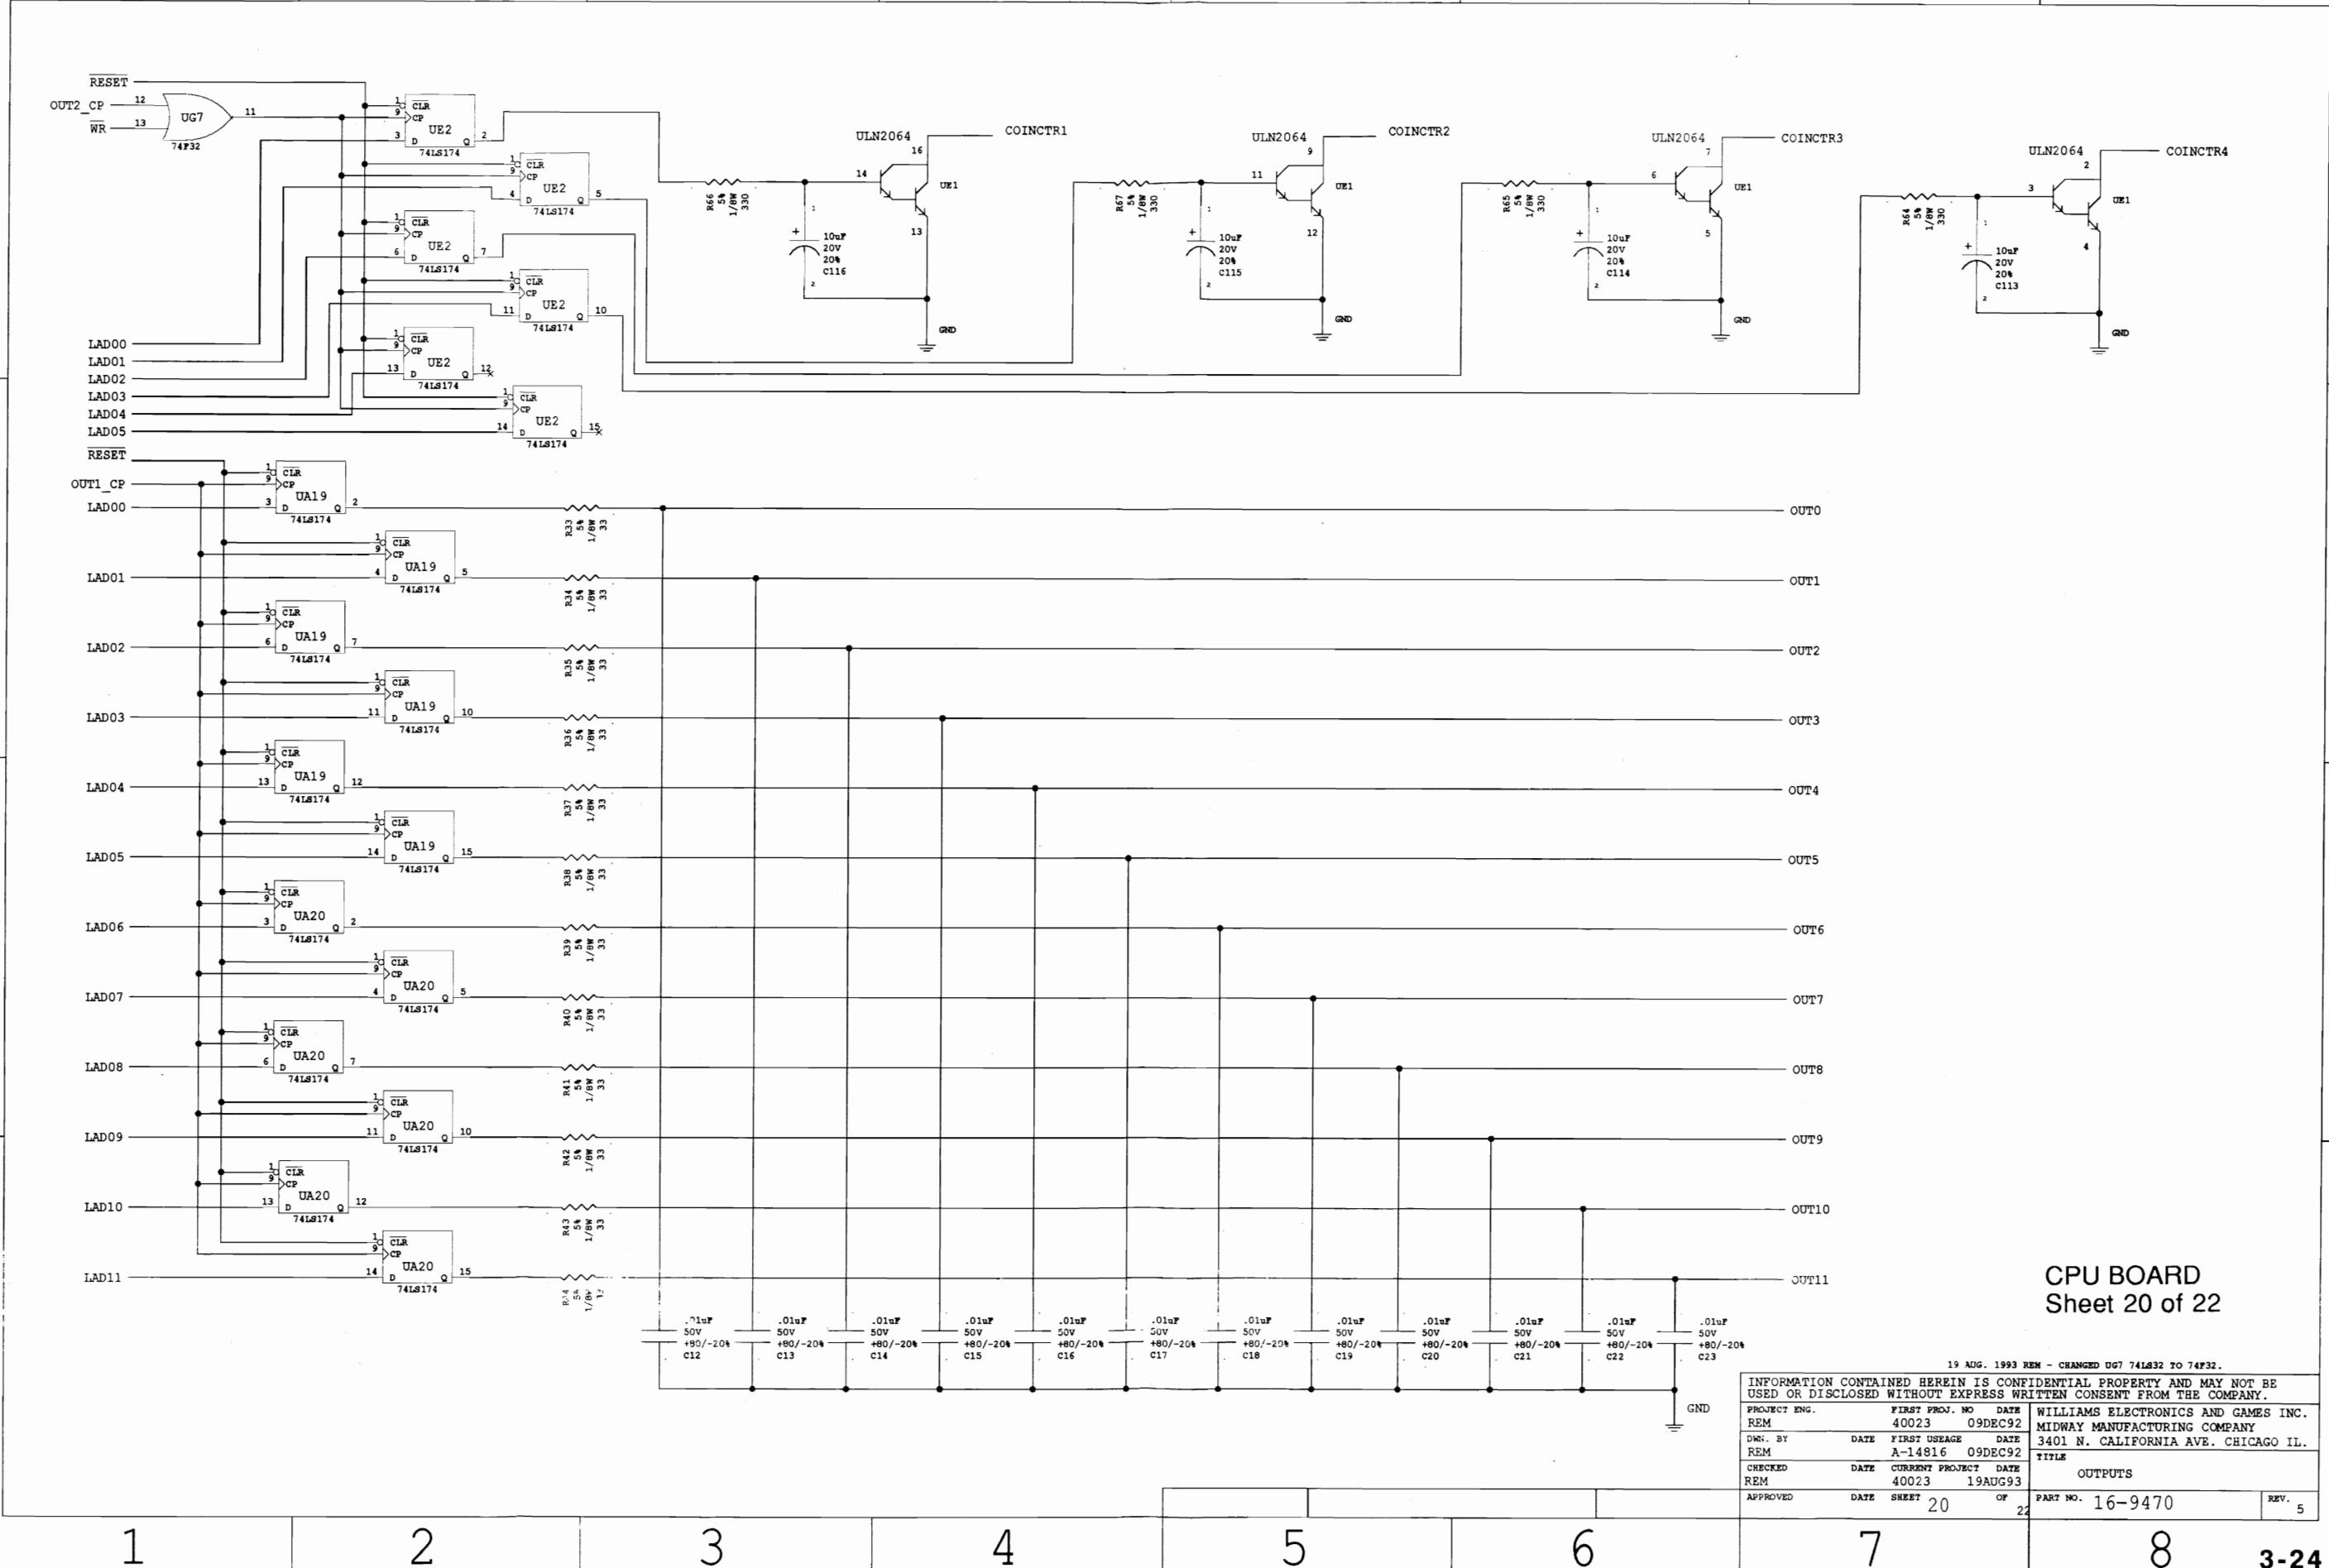

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8

D

C

B

A




D

C

B

A

## SPARE GATES

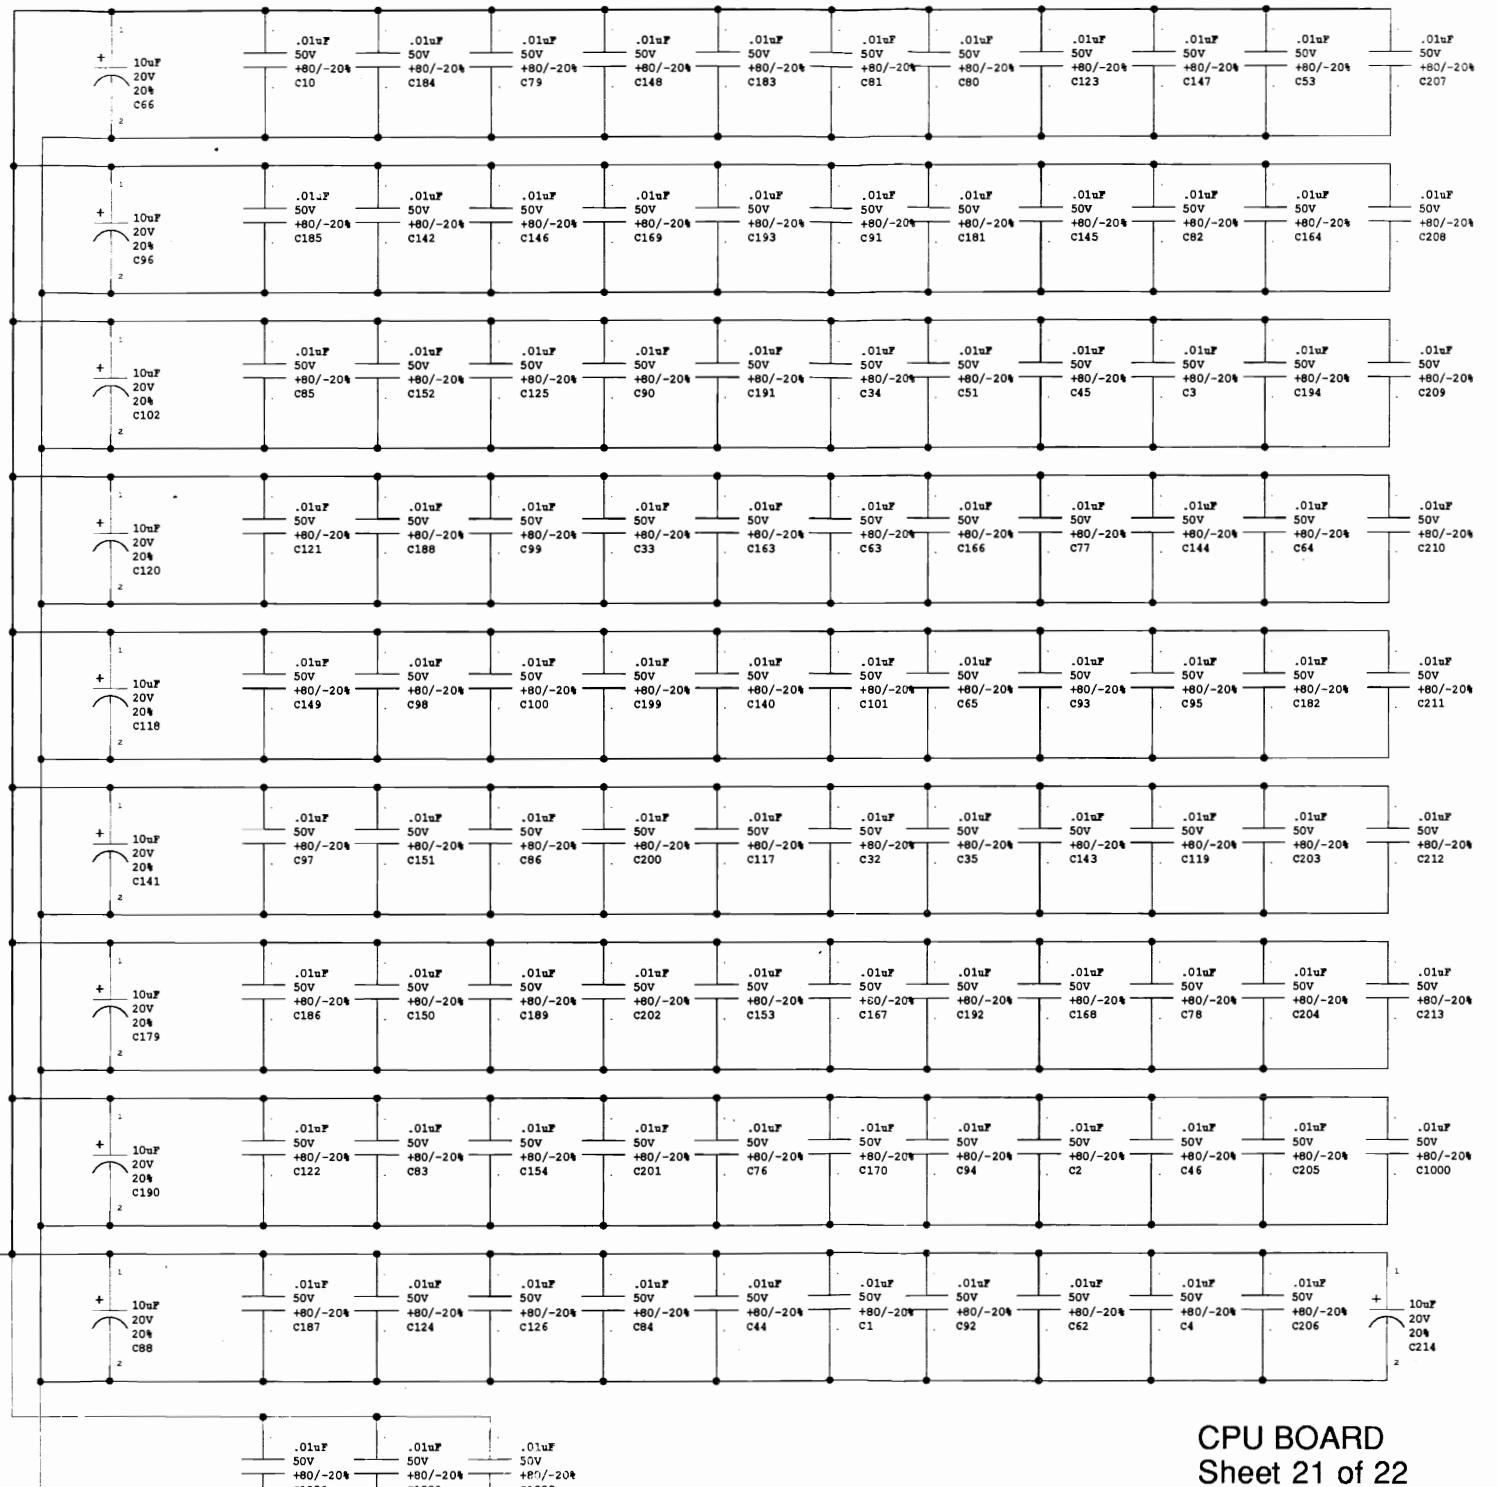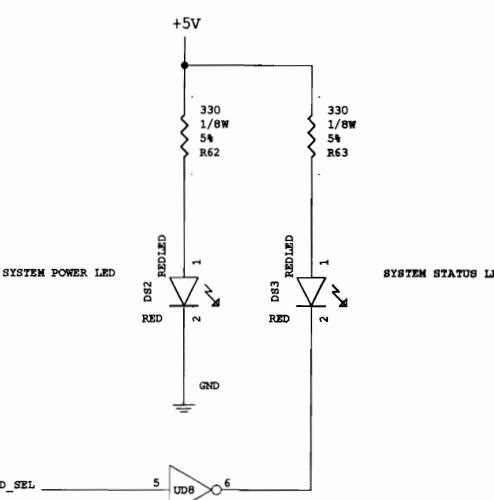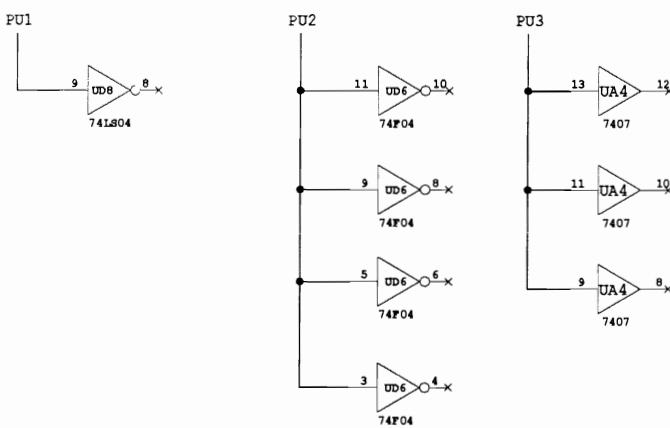

CPU BOARD  
Sheet 21 of 22

25 MAY 1993 REM - ADDED C1001, C1002, C1003

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO.	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DES. BY	DATE	FIRST USAGE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	
CHECKED	DATE	CURRENT PROJECT	TITLE
REM	40023	19AUG93	POWER
APPROVED	DATE	SHEET	PART NO.
	21	OF	16-9470
	22		REV. 5

1

2

3

4

5

6


7

8

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

D


JAMMA INTERFACE  
EDGE CONNECTOR

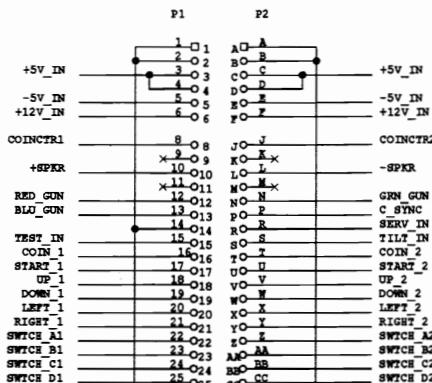


VIDEO  
INTERFACE




PLAYER 3  
INPUT CONNECTOR




AUX.  
POWER OUT




C

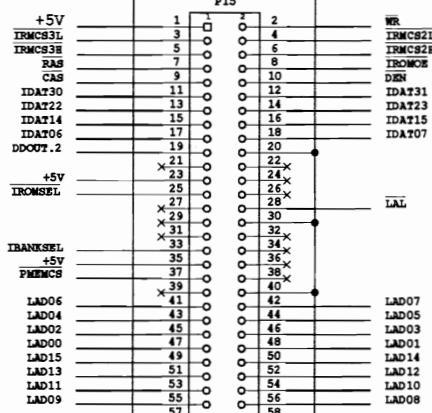


SOUND  
DATA/CONTROL  
INTERFACE

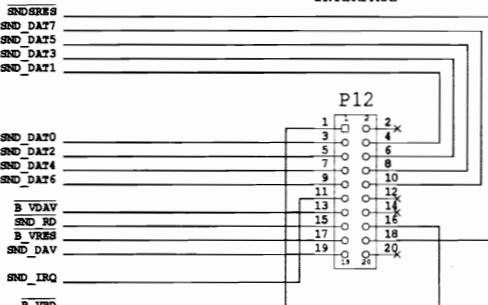


B

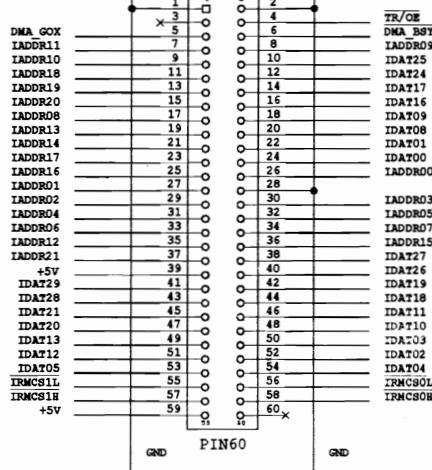


PARALLEL  
PRINTER INTERFACE

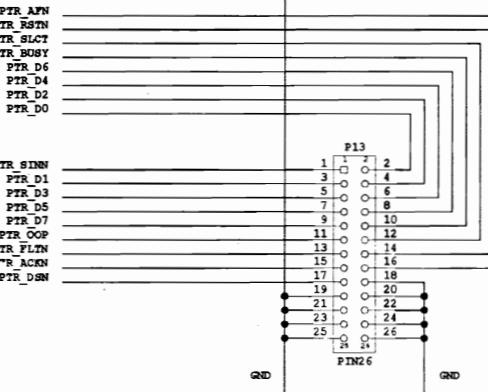


EXTRA INPUTS




0.250" SOLDER TAB FOR  
SOUND BOARD GROUND STRAP.




PLAYER 4  
INPUT CONNECTOR



AUXILIARY  
LATCHED OUTPUTS

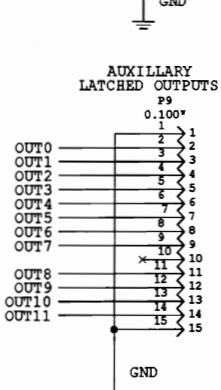

COIN 3 & 4 INPUTS



CPU BOARD  
Sheet 22 of 22


INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	FIRST PROJ. NO	DATE	WILLIAMS ELECTRONICS AND GAMES INC.
REM	40023	09DEC92	MIDWAY MANUFACTURING COMPANY
DMN. BY	FIRST USAGE DATE	DATE	3401 N. CALIFORNIA AVE. CHICAGO IL.
REM	A-14816	09DEC92	TITLE
CHECKED	CURRENT PROJECT DATE	DATE	CONNECTORS
REM	40023	19AUG93	
APPROVED	DATE	SHEET	PART NO. 16-9470
		22	REV. 5

A


1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 3-26

A B C D

### IROM ADDRESS BUFFERS

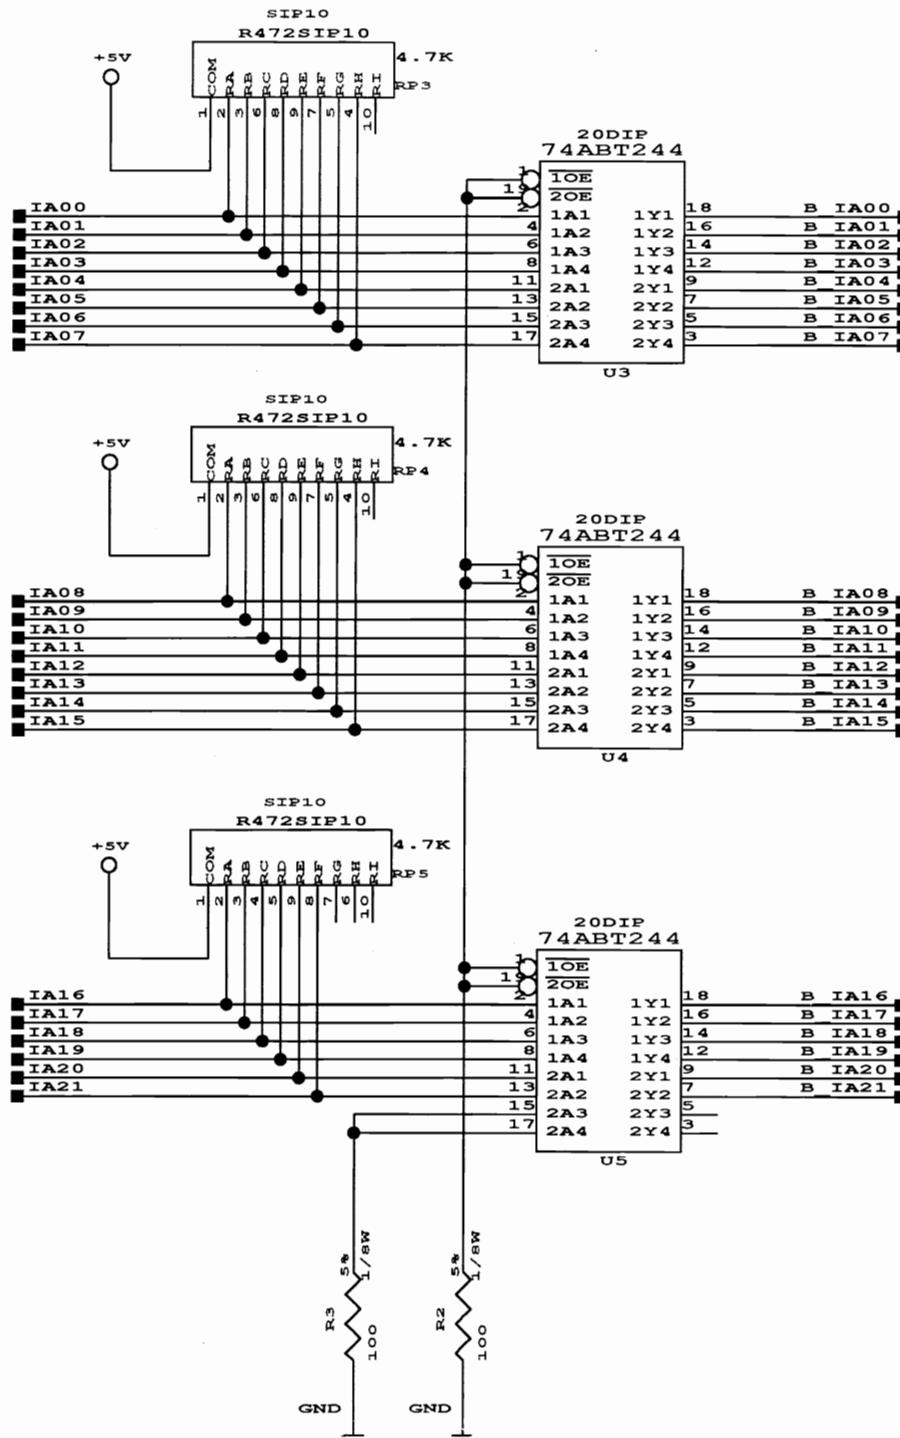



### IROM CS GENERATOR

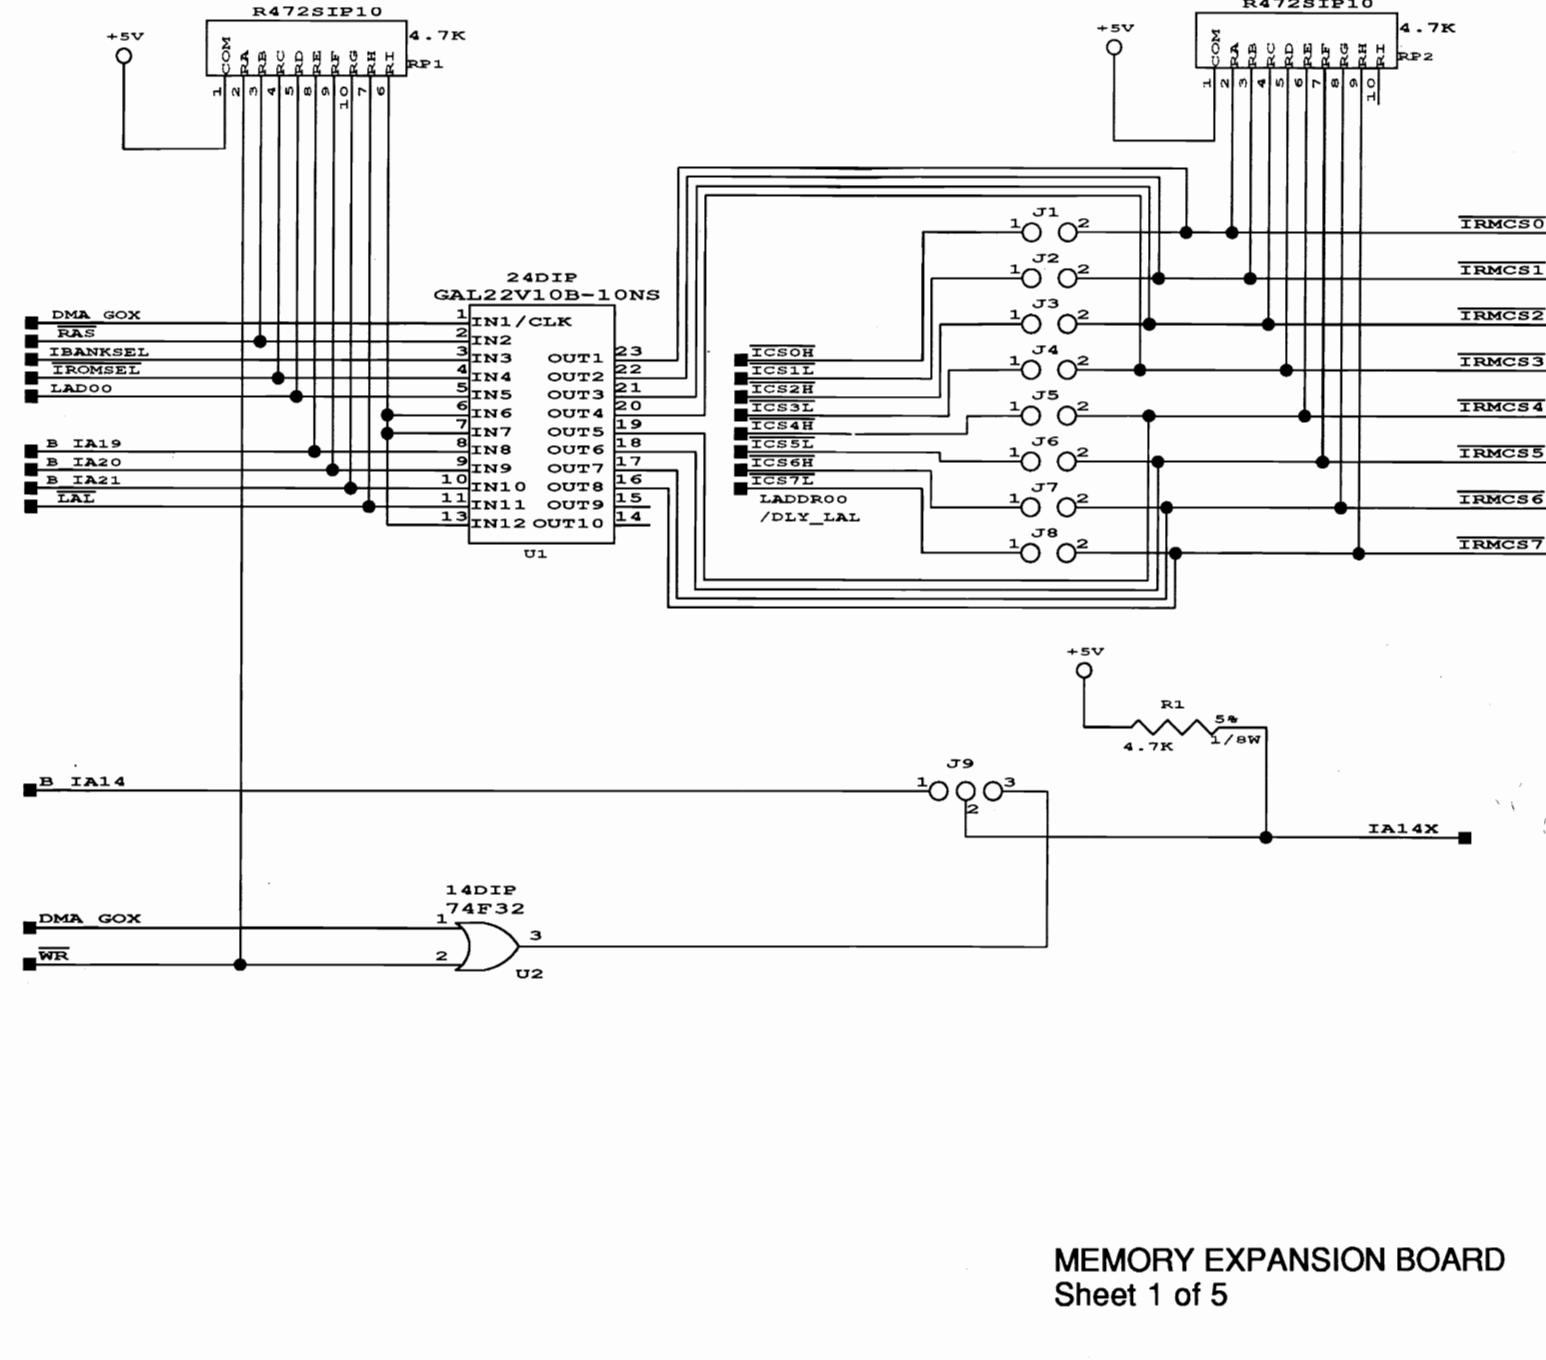

**MEMORY EXPANSION BOARD**  
Sheet 1 of 5

ECN	CHANGE	DATE
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.		
PROJECT ENG.	1ST PROJ. NO.	DATE
DWN. BY	DATE	1ST USAGE DATE
REM 8-20-1993_6:34		
CHECKED	DATE	CURRENT PROJ. DATE
APPROVED	DATE	SHEET OF 5 PART NO. REV. 1

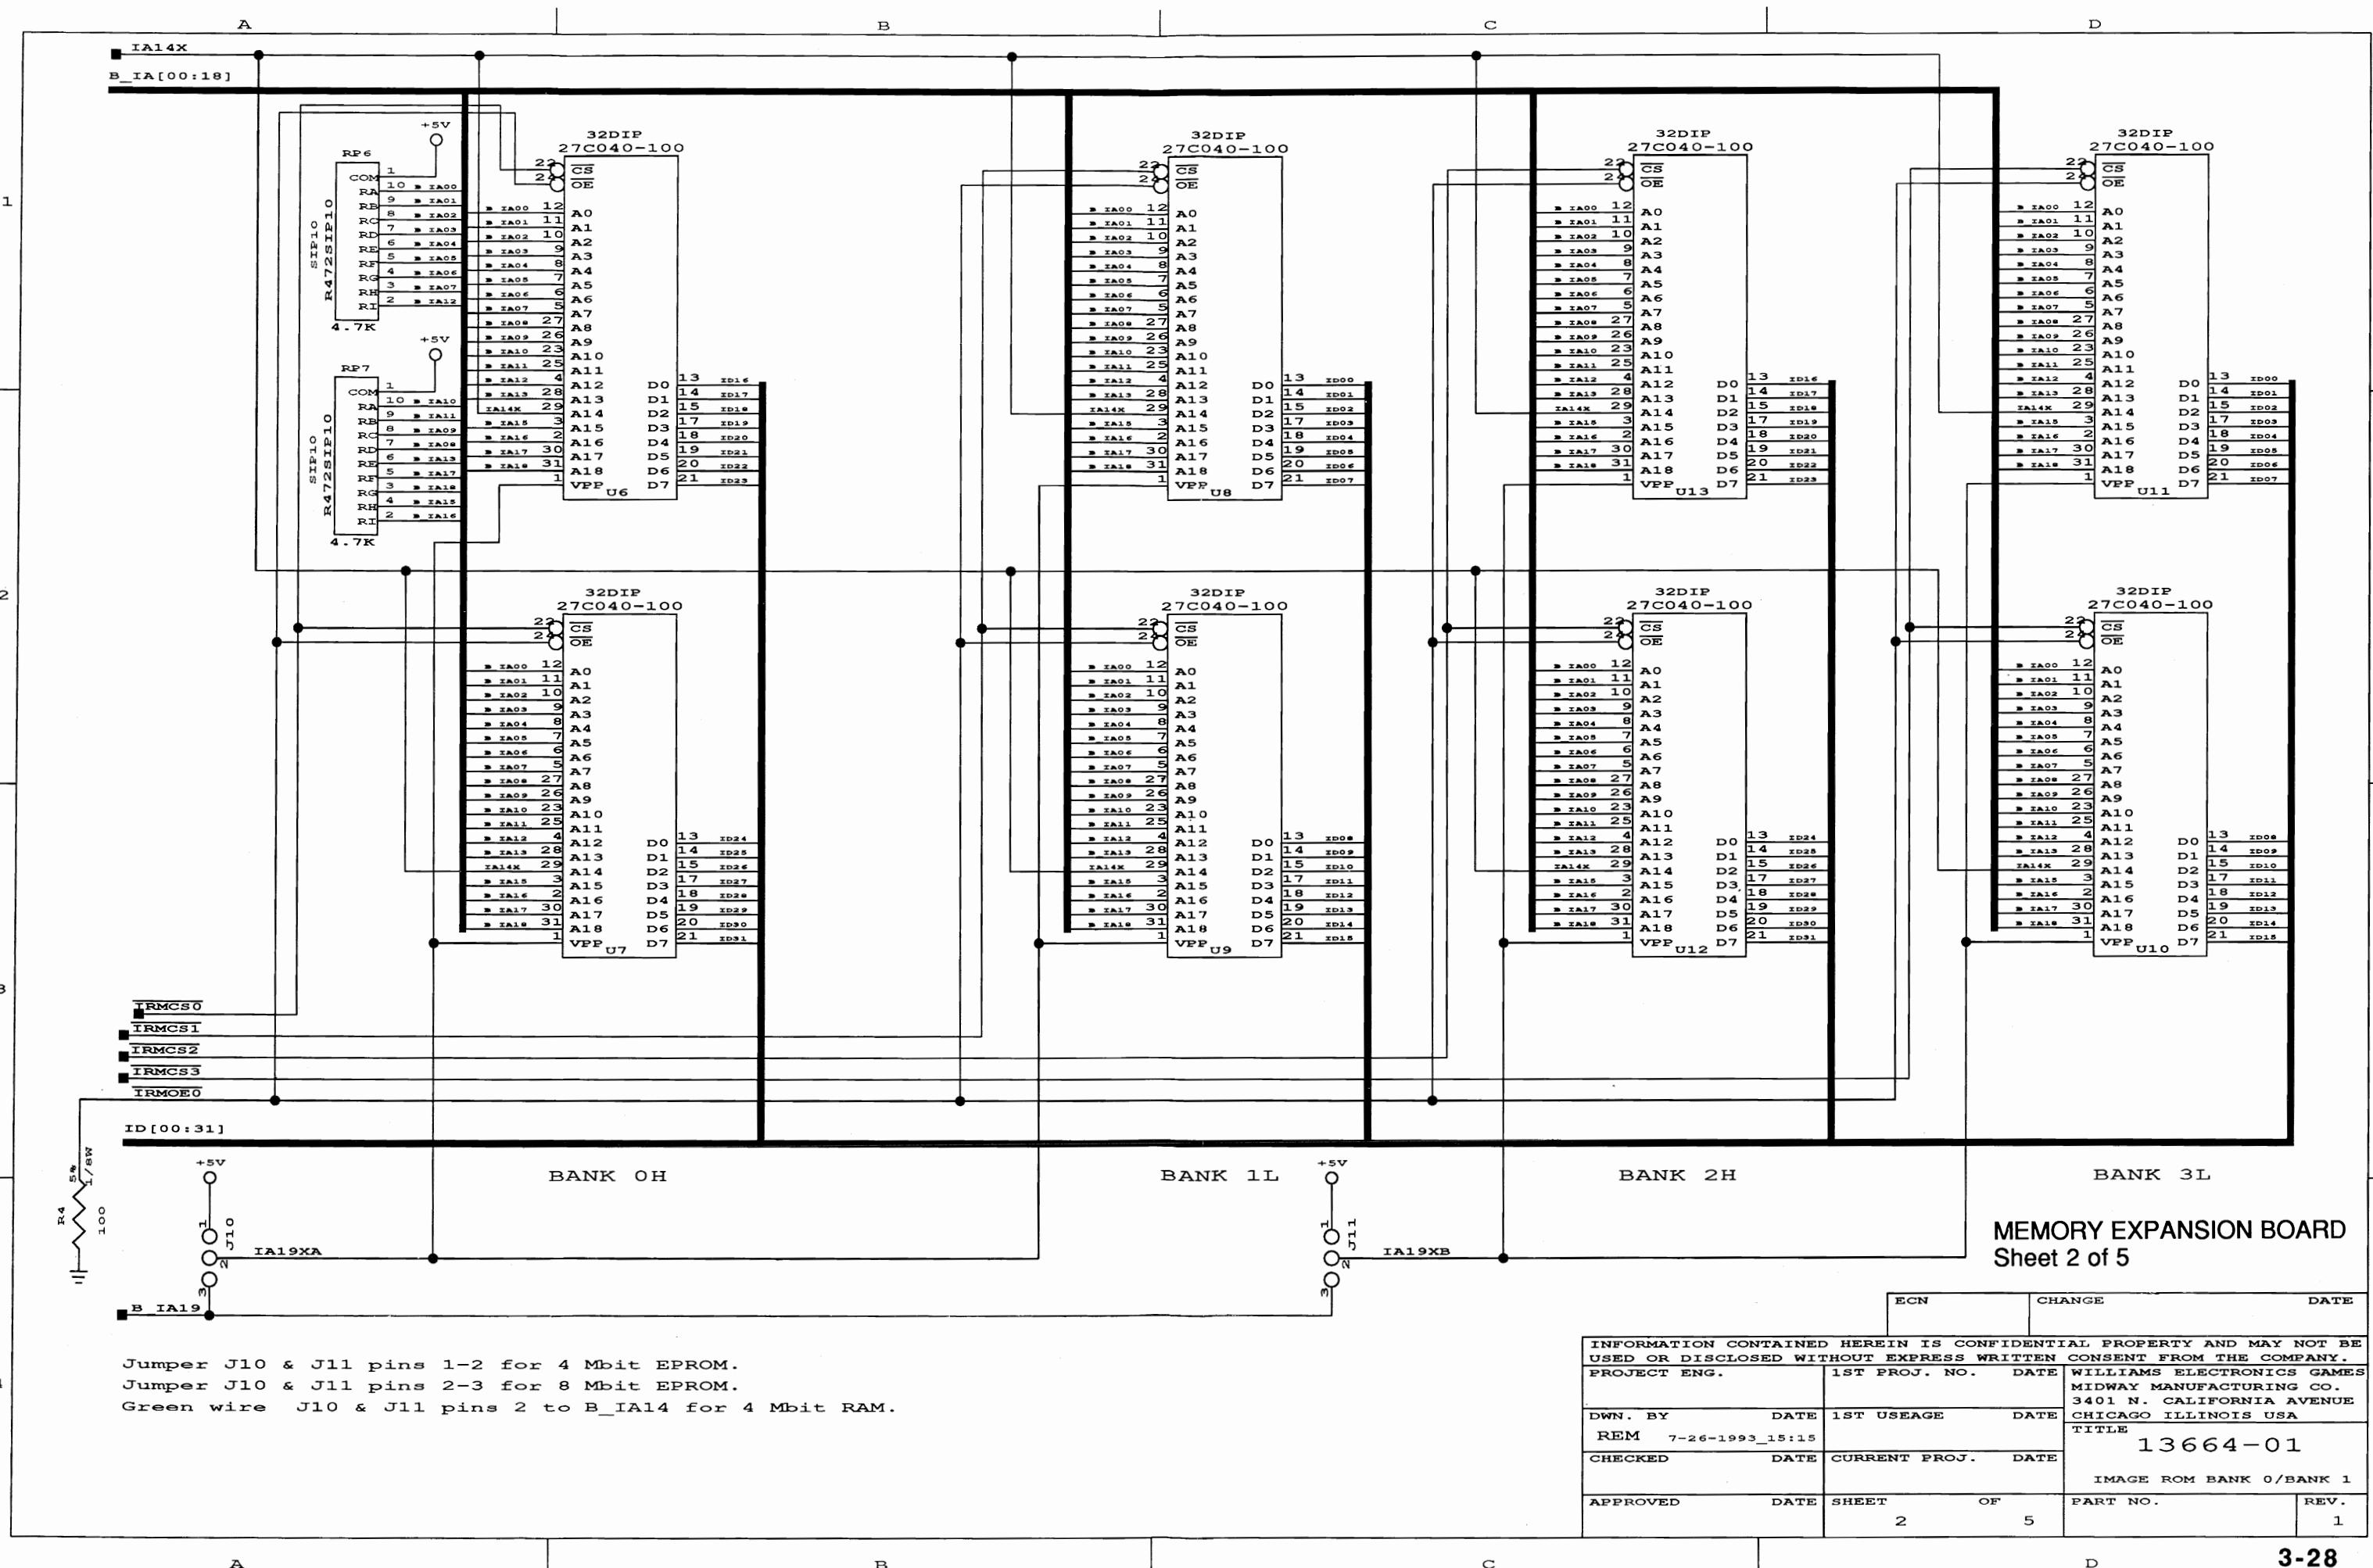


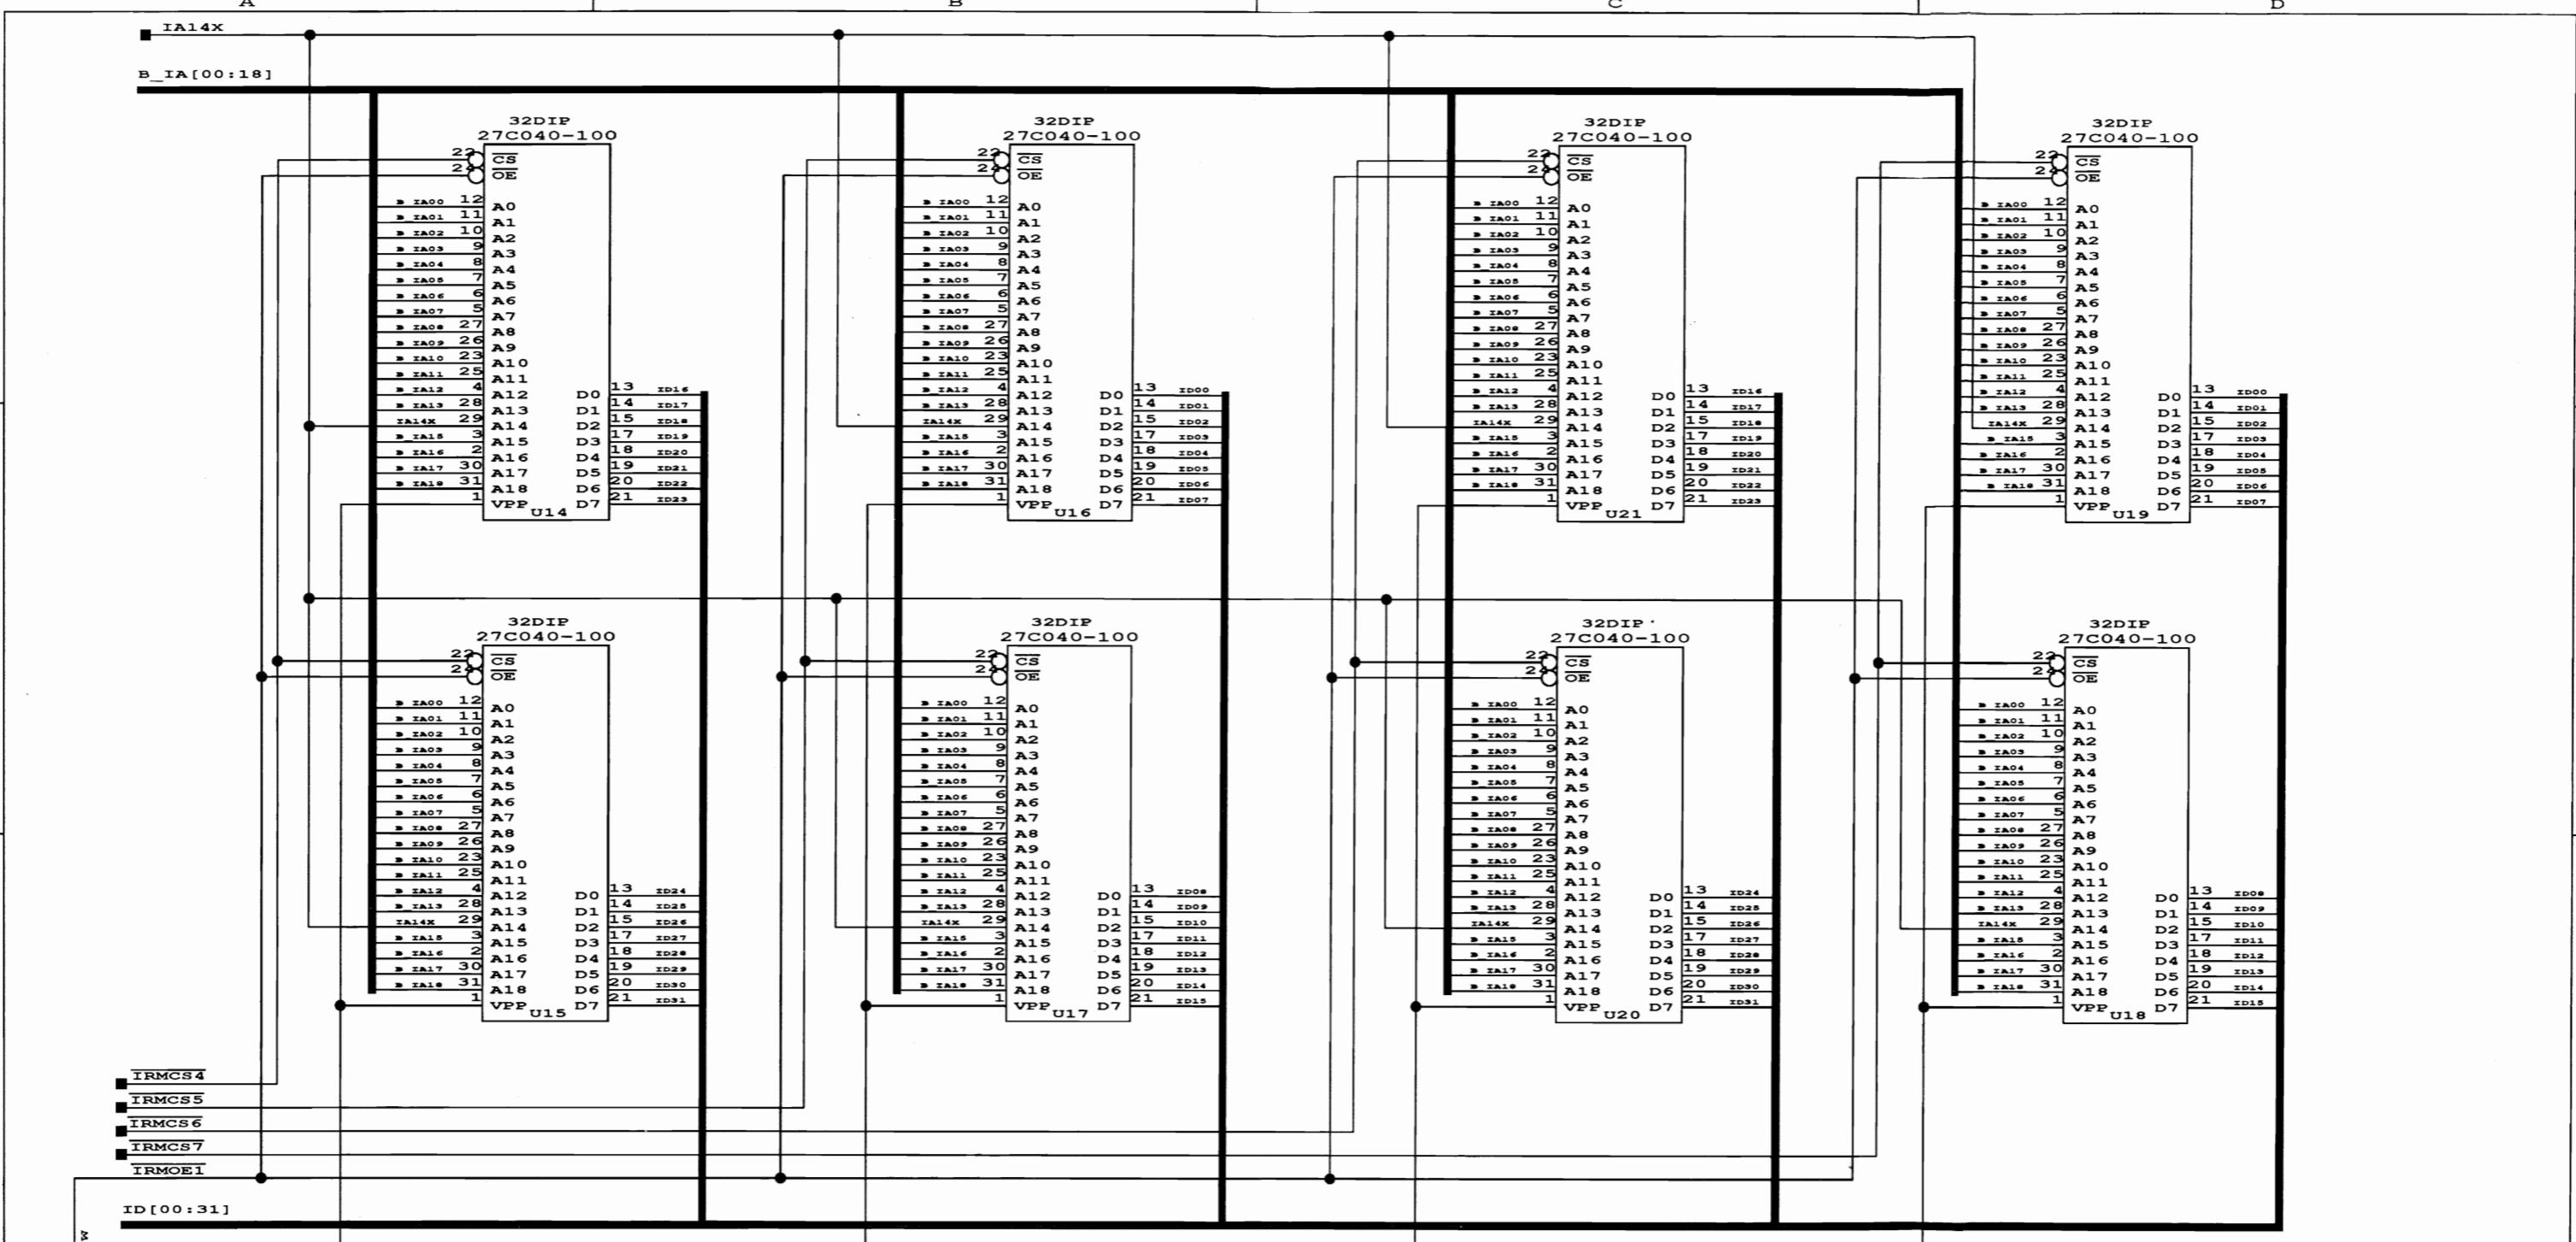


Jumper J12 & J13 pins 1-2 for 4 Mbit EPROM.  
Jumper J12 & J13 pins 2-3 for 8 Mbit EPROM.  
Green wire J12 & J13 pins 2 to B\_IA14 for 4 Mbit RAM.

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	1ST PROJ. NO.	DATE	WILLIAMS ELECTRONICS GAMES
DWN. BY	DATE	1ST USAGE	MIDWAY MANUFACTURING CO.
REM 7-26-1993 15:15			3401 N. CALIFORNIA AVENUE
TITLE			CHICAGO ILLINOIS USA
13664-01			
IMAGE ROM BANK 0/BANK 1			
APPROVED	DATE	SHEET 3 OF 5	PART NO. REV. 1


## A SPARE GATES

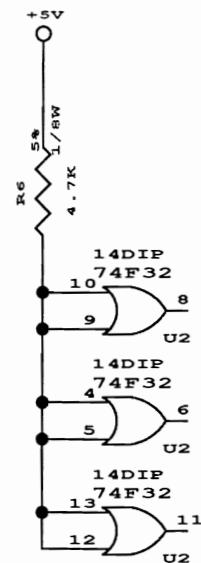

## B BYPASS CAPS

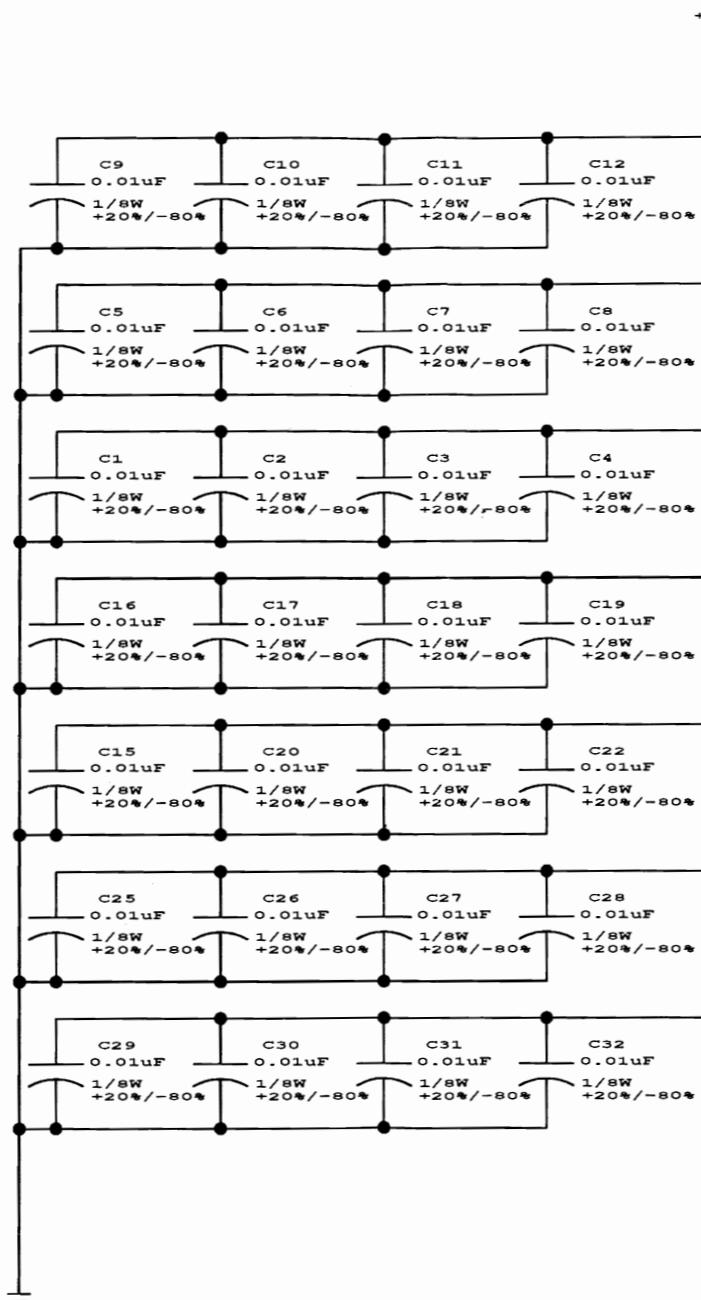


## C FILTER CAPS

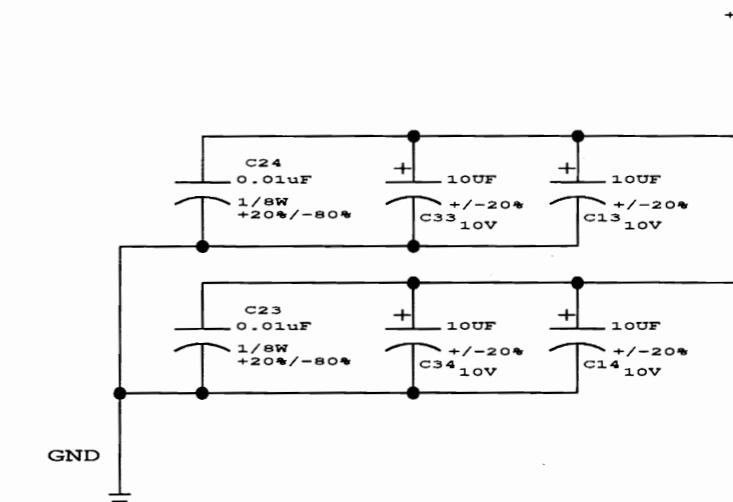MEMORY EXPANSION BOARD  
Sheet 4 of 5

	ECN	CHANGE	DATE
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	1ST PROJ. NO.	DATE	WILLIAMS ELECTRONICS GAMES
DWN. BY	DATE	1ST USAGE	MIDWAY MANUFACTURING CO.
REM 7-26-1993_15:15		DATE	3401 N. CALIFORNIA AVENUE
CHECKED	DATE	CURRENT PROJ.	CHICAGO ILLINOIS USA
TITLE 13664-01			
CAPS/SPARE GATES			
APPROVED	DATE	SHEET OF	PART NO. REV.
		4 5	

A | B | C | D

T-UNIT EXPANSION CONNECTORS

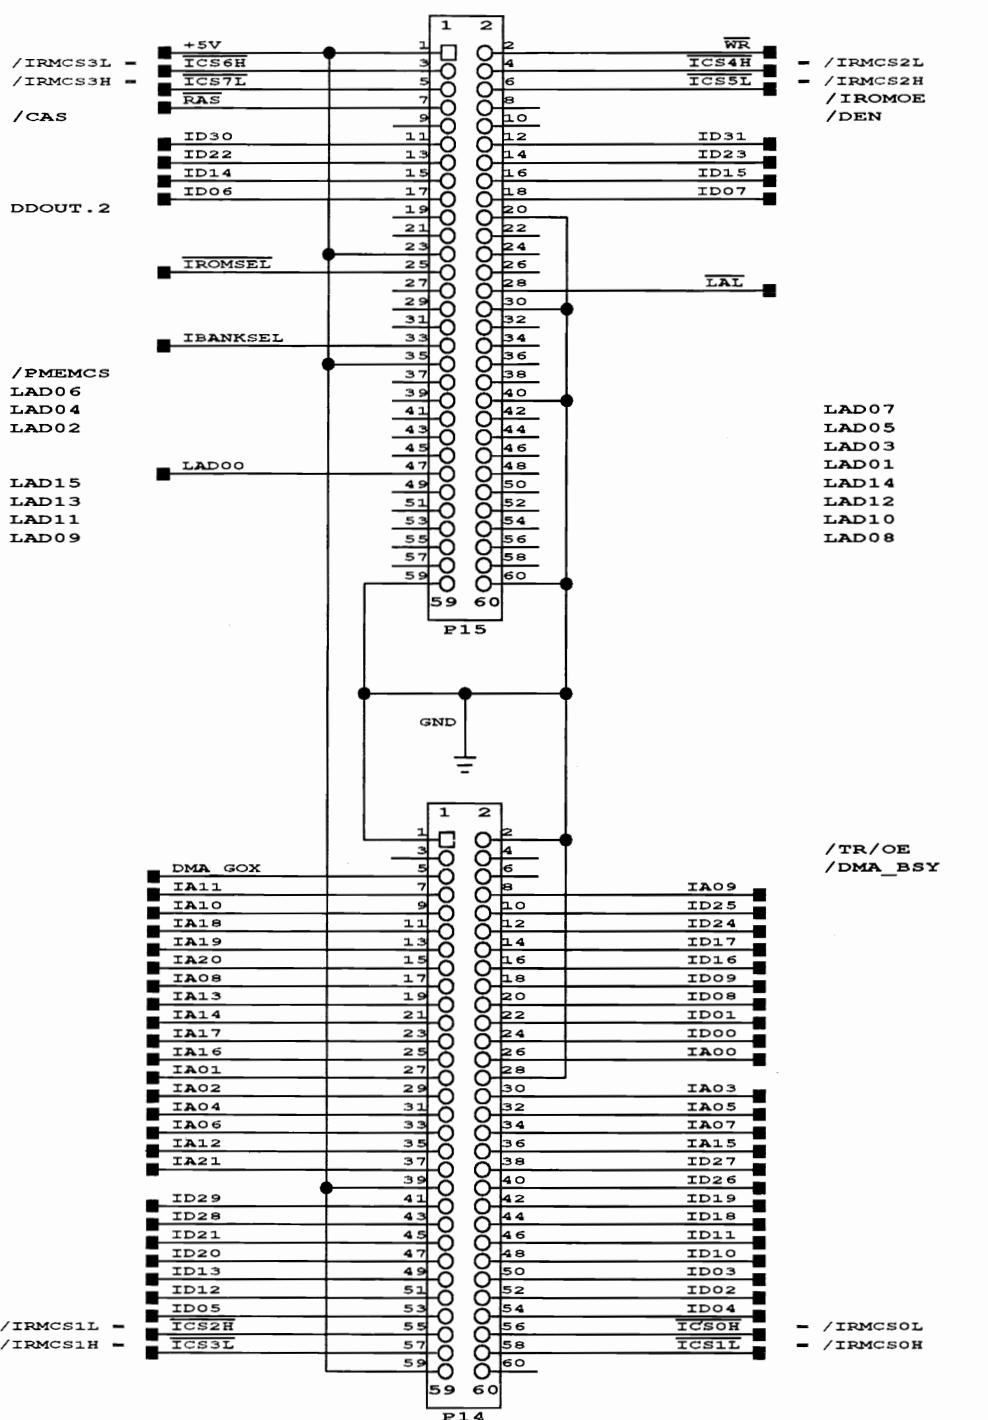


MEMORY EXPANSION BOARD  
Sheet 5 of 5


T-UNIT CPU . EXPANSION  
BOARD - CARD

/IRMCSOL - /ICSOH - /IRMSC0  
/IRMCSOH - /ICSOH - /IRMSC1  
/IRMCS1L - /ICSOH - /IRMSC2  
/IRMCS1H - /ICSOH - /IRMSC3  
/IRMCS2L - /ICSOH - /IRMSC4  
/IRMCS2H - /ICSOH - /IRMSC5  
/IRMCS3L - /ICSOH - /IRMSC6  
/IRMCS3H - /ICSOH - /IRMSC7

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.		
PROJECT ENG.	1ST PROJ. NO.	DATE
		WILLIAMS ELECTRONICS GAMES MIDWAY MANUFACTURING CO. 3401 N. CALIFORNIA AVENUE CHICAGO ILLINOIS USA
REM 7-26-1993_15:15		TITLE 13664-01
CHECKED	DATE	CURRENT PROJ. DATE
APPROVED	DATE	SHEET OF 5 5
		PART NO. REV. 1




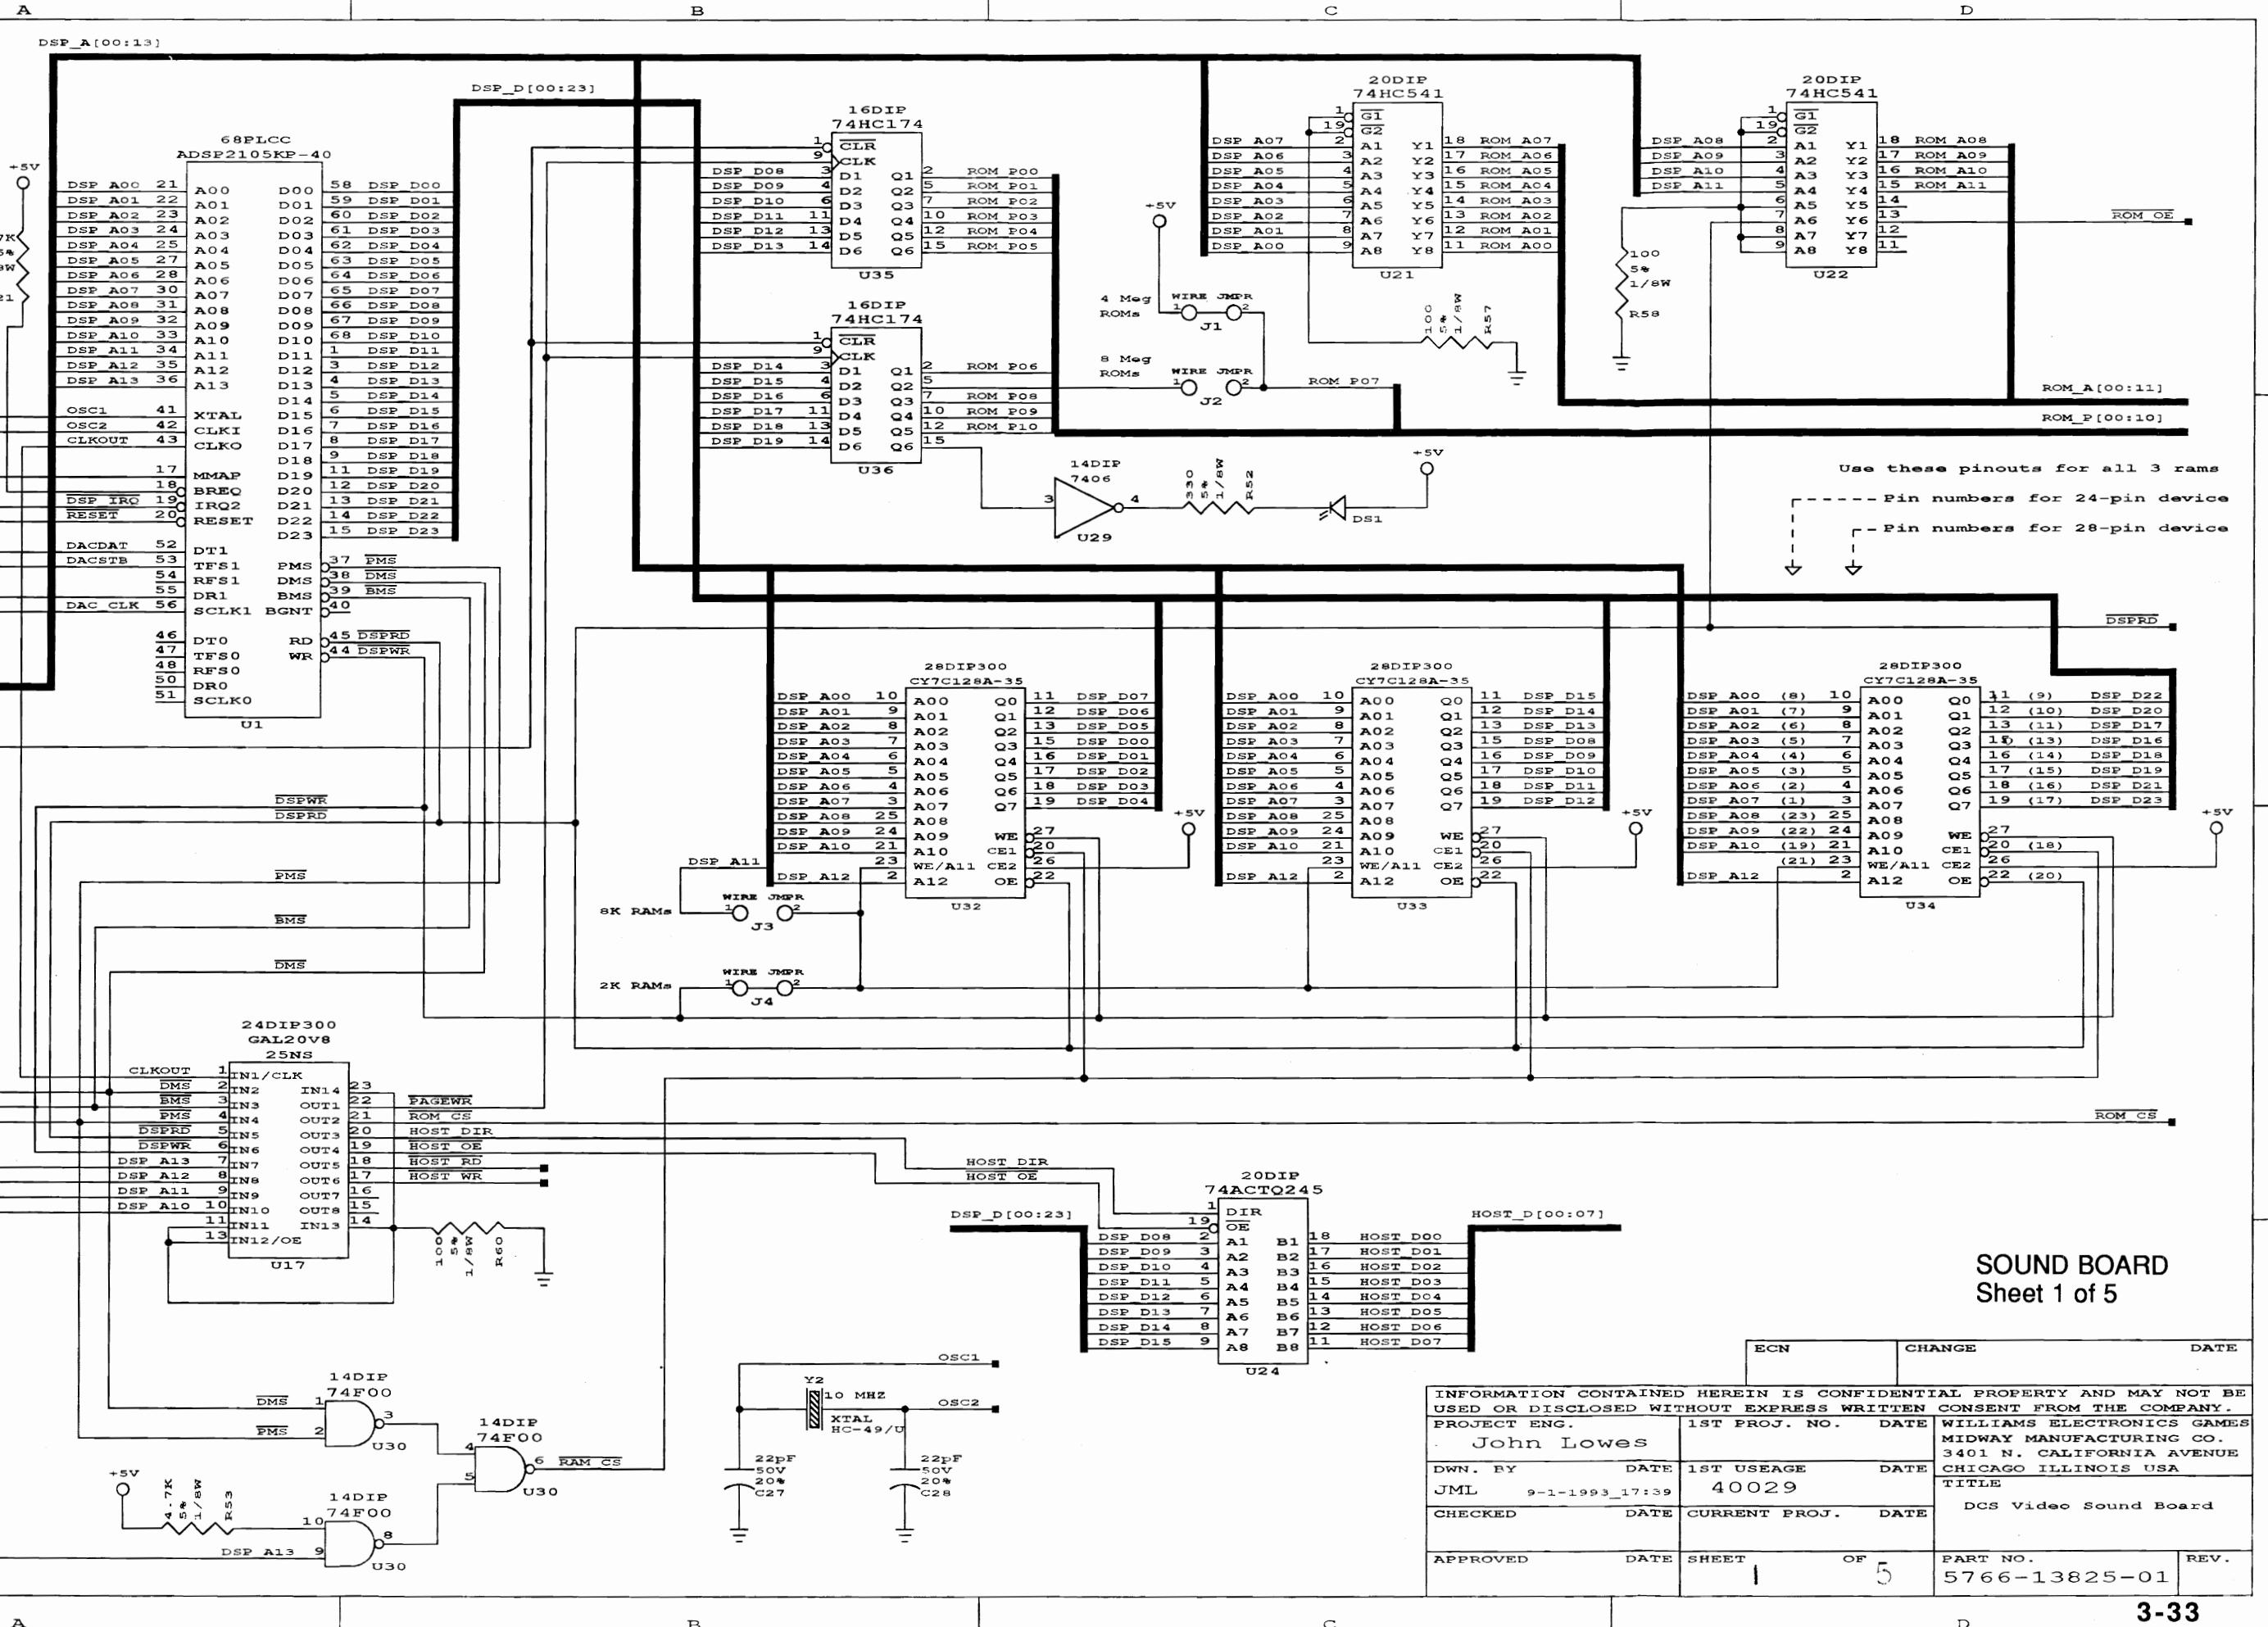

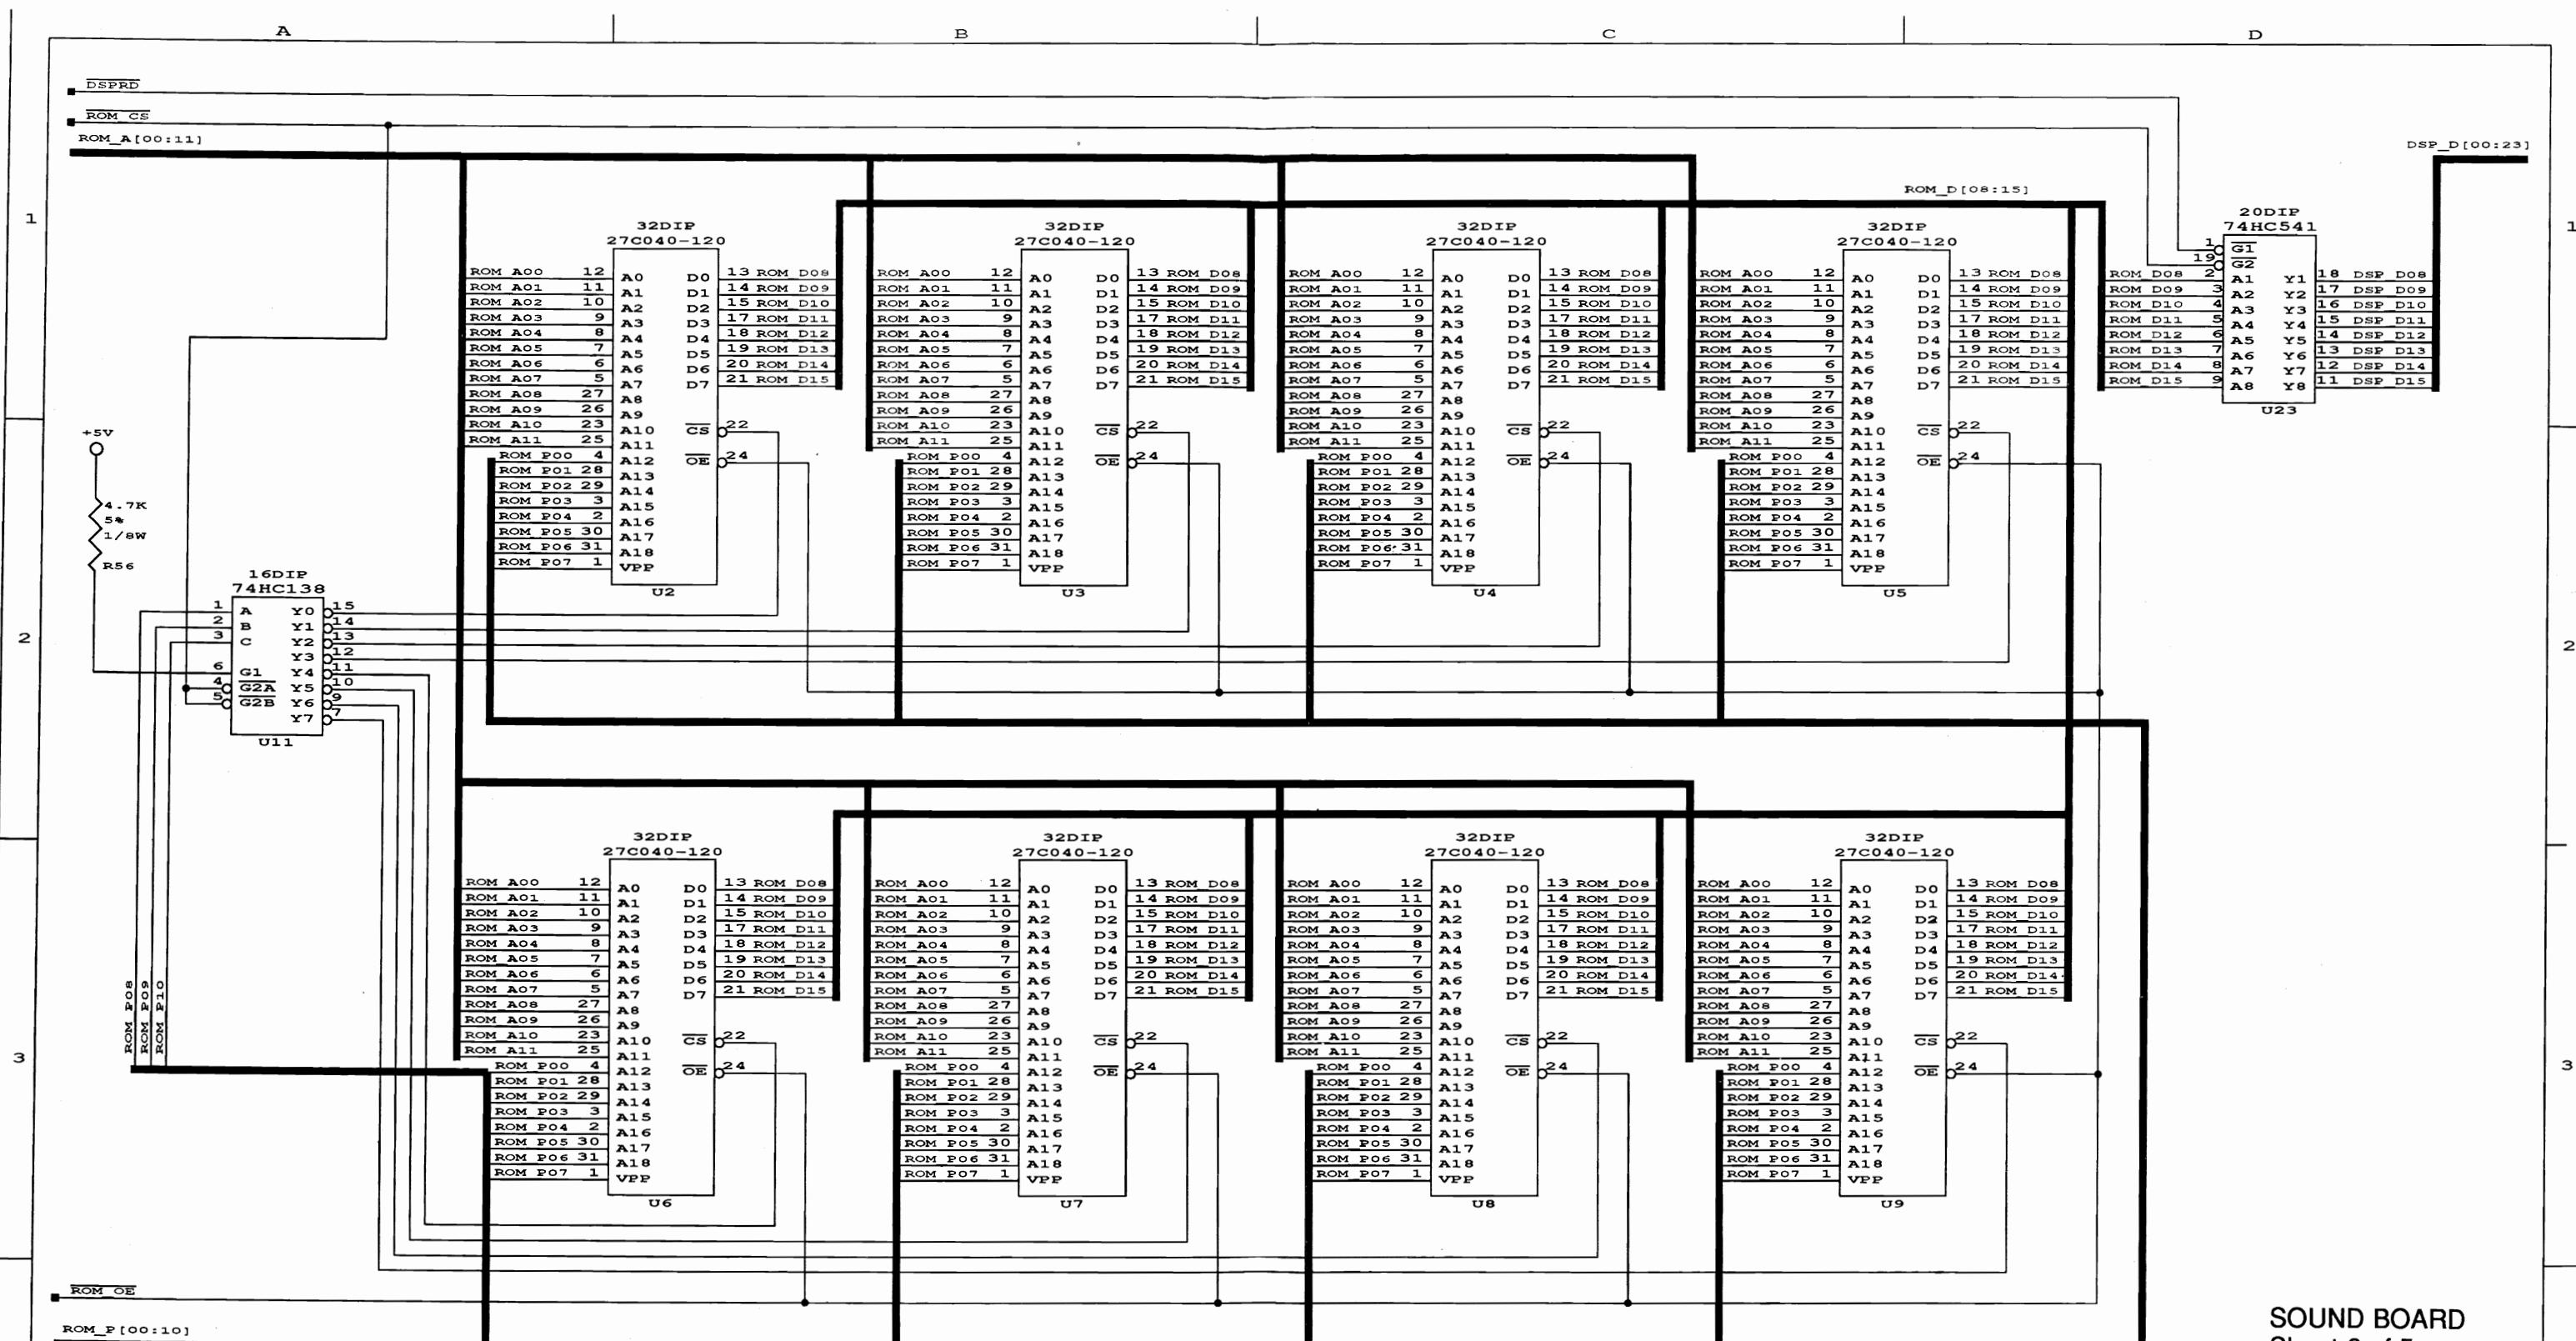


ECN	CHANGE	DATE
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.		
PROJECT ENG. John Lowes	1ST PROJ. NO.	DATE
DWN. BY JML	DATE 9-1-1993_17:39	1ST USAGE 40029
CHECKED	DATE	CURRENT PROJ. DATE
APPROVED	DATE	SHEET 2 OF 5
PART NO. 5766-13825-01		REV.

A B C D

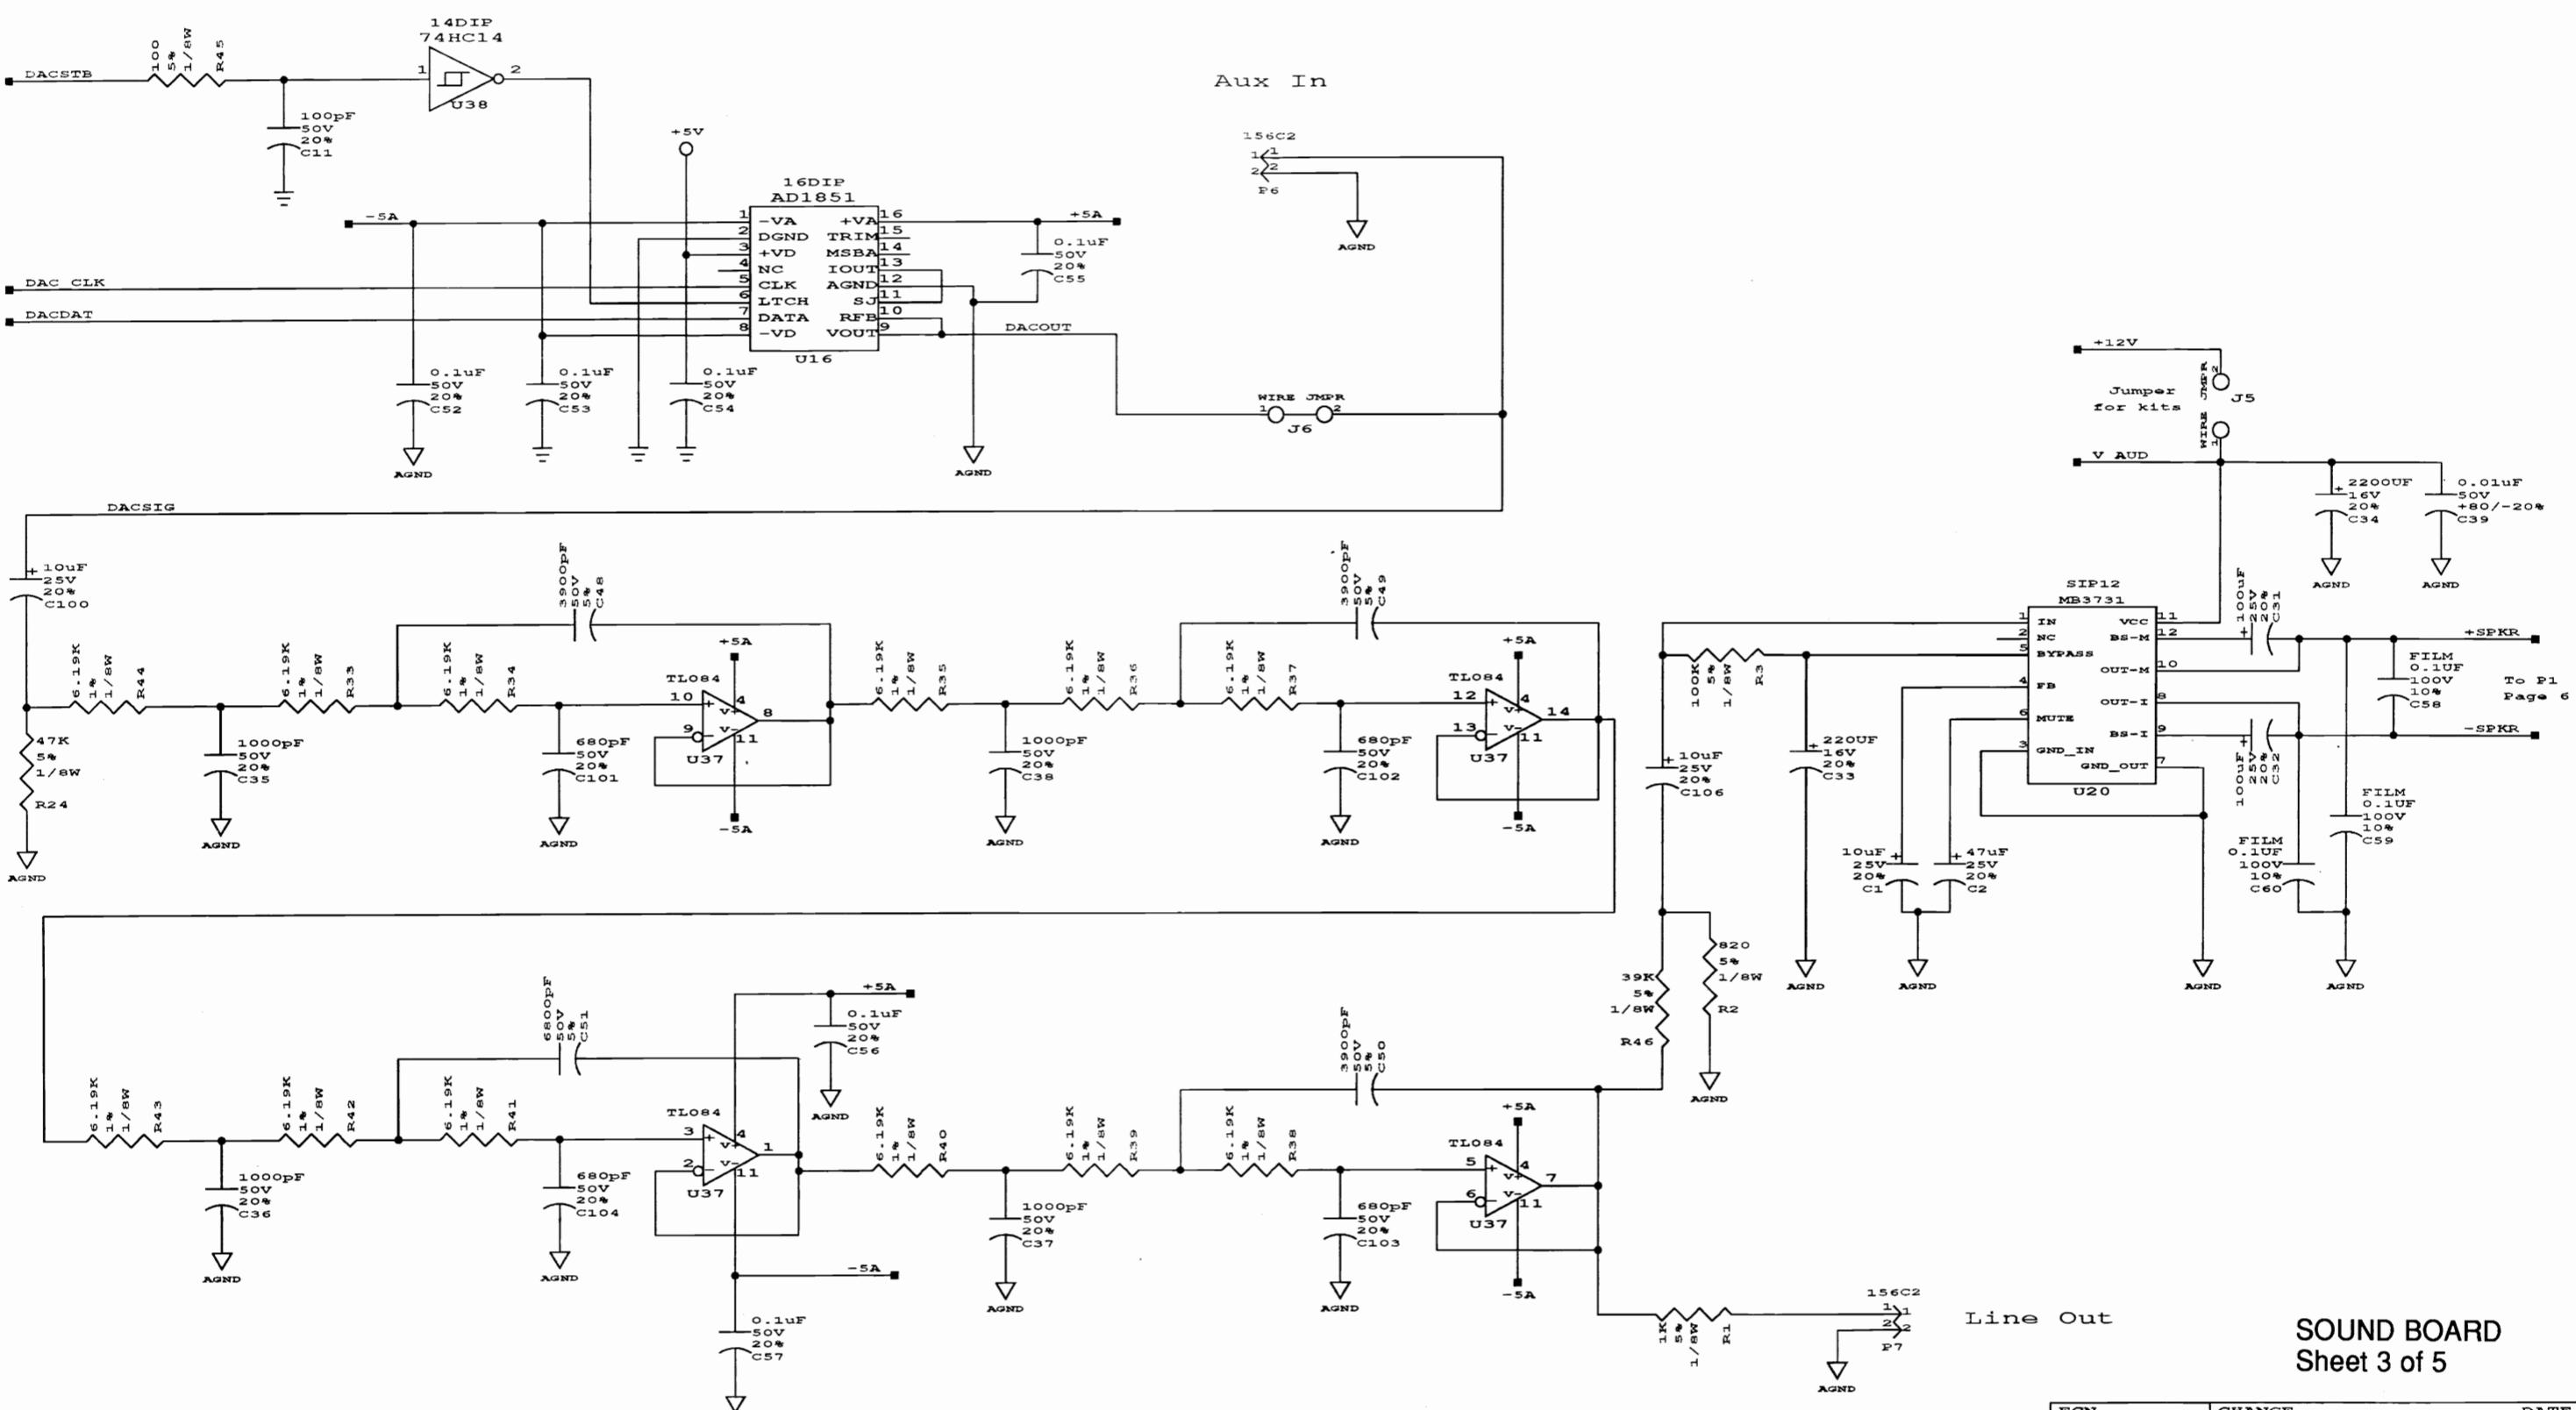


### SOUND BOARD Sheet 3 of 5


INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.			
PROJECT ENG.	1ST PROJ. NO.	DATE	WILLIAMS ELECTRONICS GAMES
John Lowes			MIDWAY MANUFACTURING CO.
DWN. BY	DATE	1ST USAGE	3401 N. CALIFORNIA AVENUE
JML	9-1-1993_17:39	40029	CHICAGO ILLINOIS USA
CHECKED	DATE	CURRENT PROJ.	TITLE
			DCS Video Sound Board
APPROVED	DATE	SHEET	Anti-Aliasing Filter
		OF	PART NO.
			5766-13825-01
			REV.

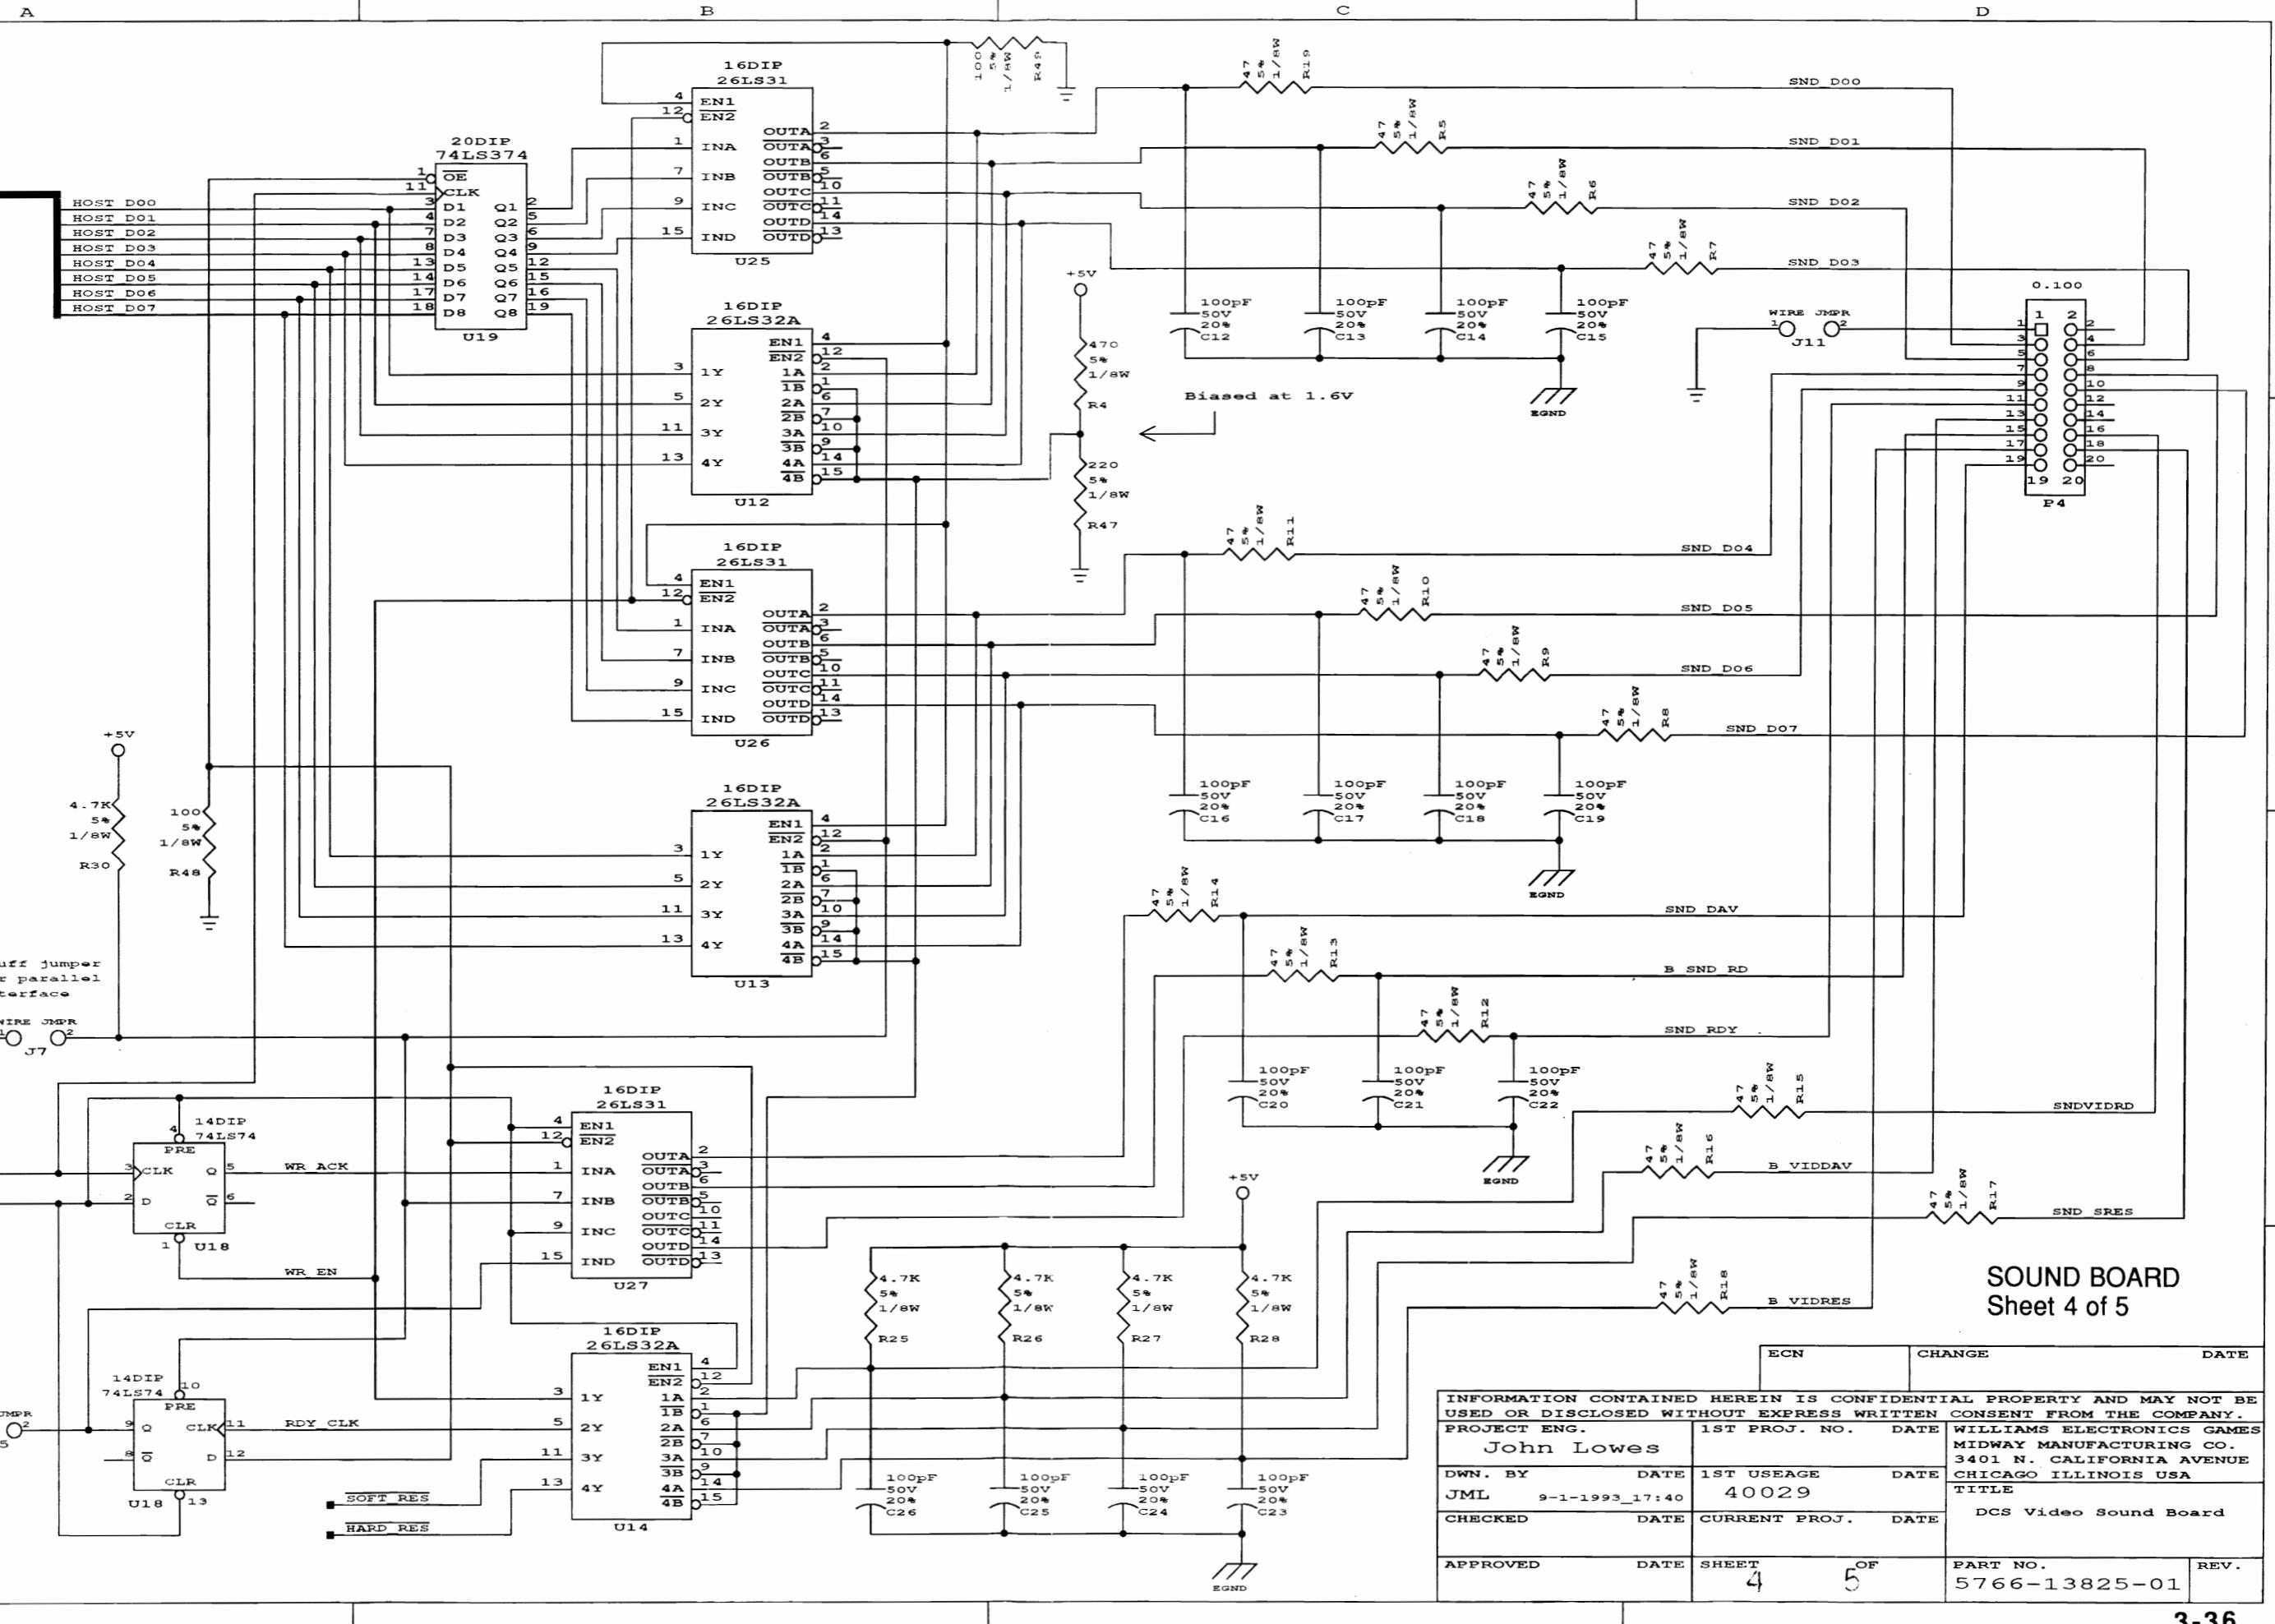


## Reset Circuit

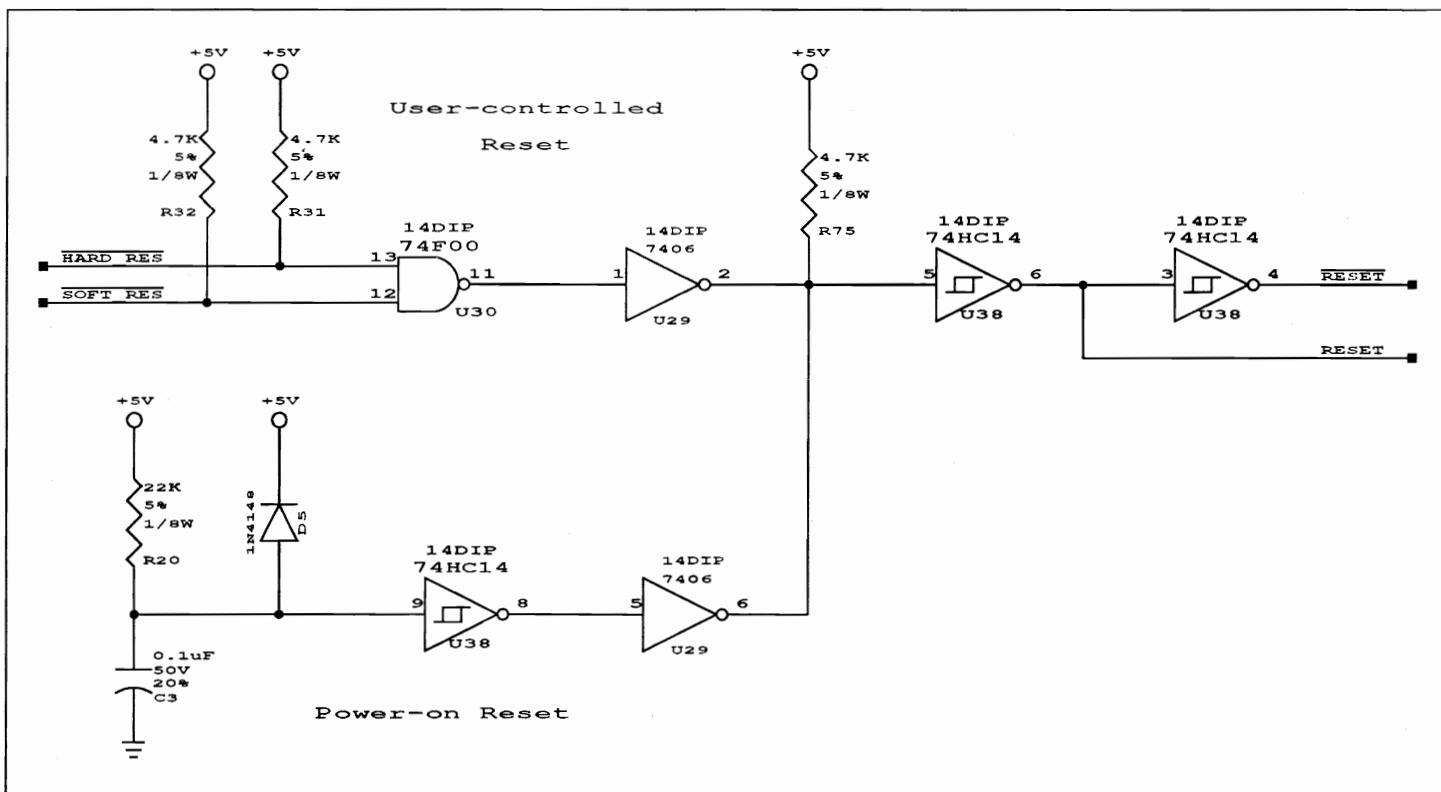




## GROUND ISOLATION

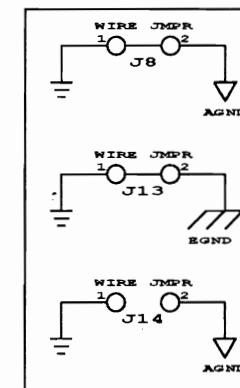

## Analog/Digital Power

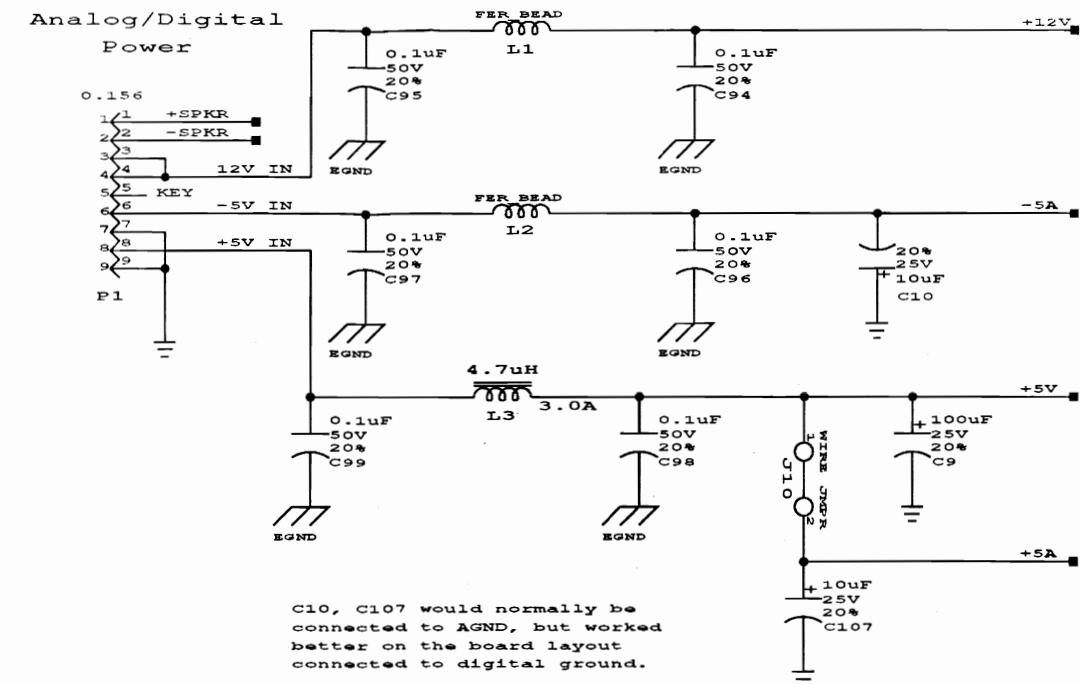


## Spare Gates

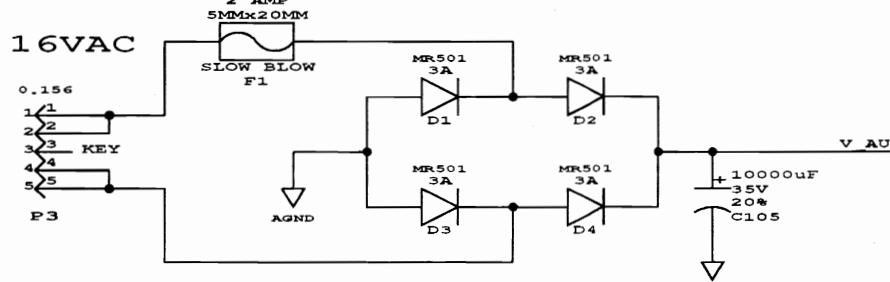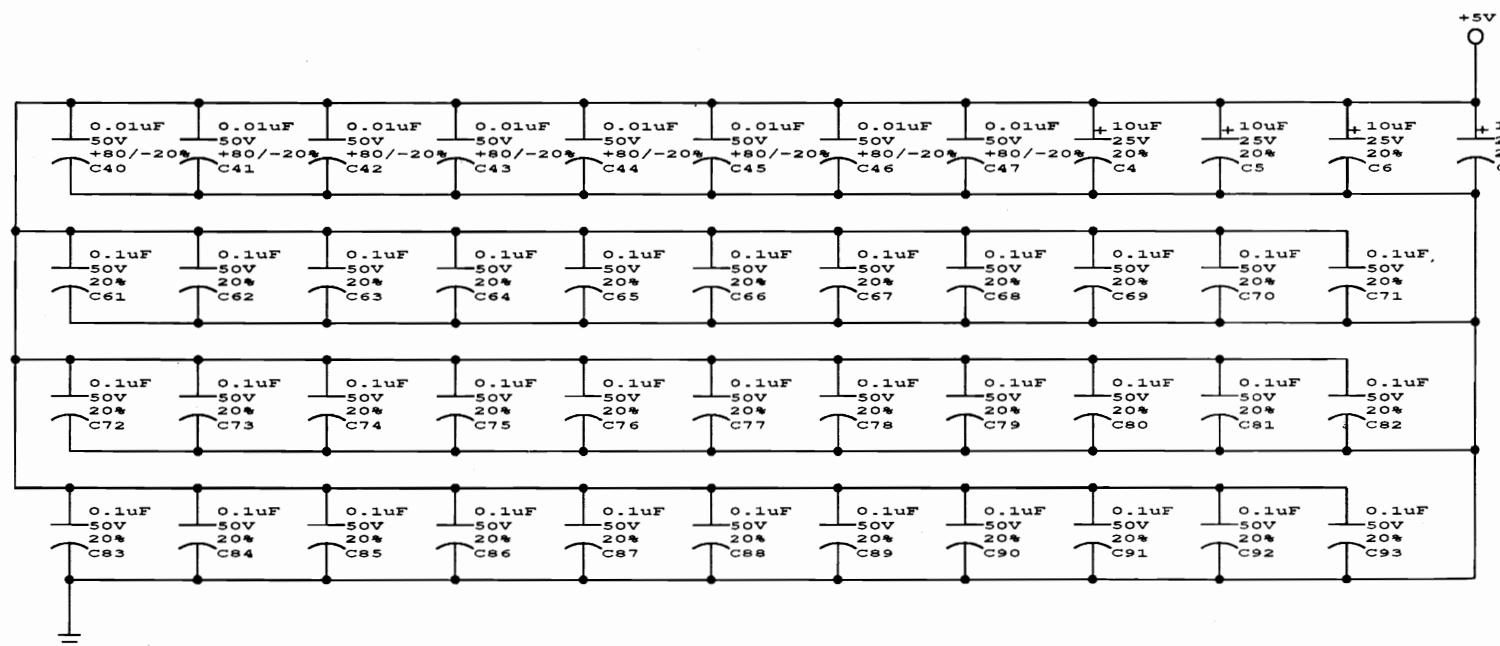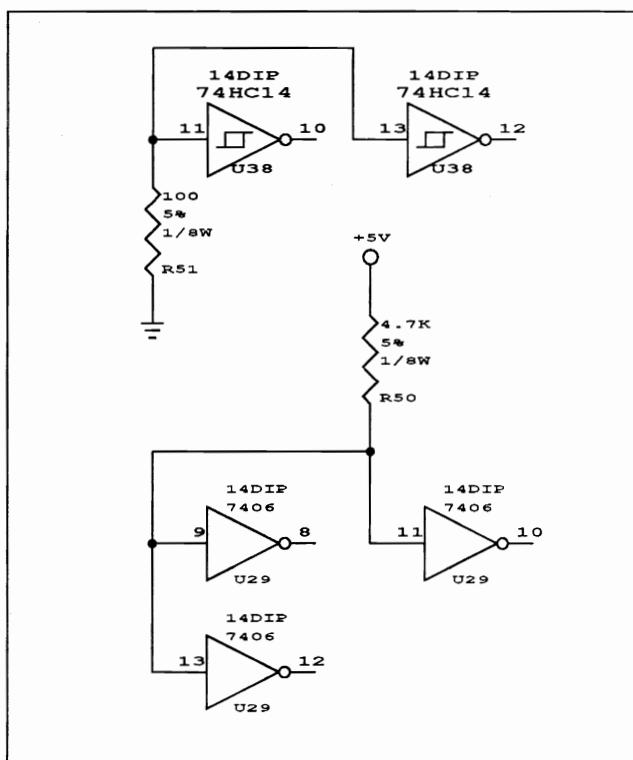

**SOUND BOARD  
Sheet 5 of 5**

ECN	CHANGE	DATE
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL PROPERTY AND MAY NOT BE USED OR DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT FROM THE COMPANY.		
PROJECT ENG. John Lowes	1ST PROJ. NO.	DATE
DWN. BY JML 9-1-1993 17:41	1ST USAGE 40029	DATE
CHECKED	CURRENT PROJ.	DATE
APPROVED	DATE	SHEET OF
	5	5
PART NO. 5766-13825-01	REV.	

THIS SIDE UP

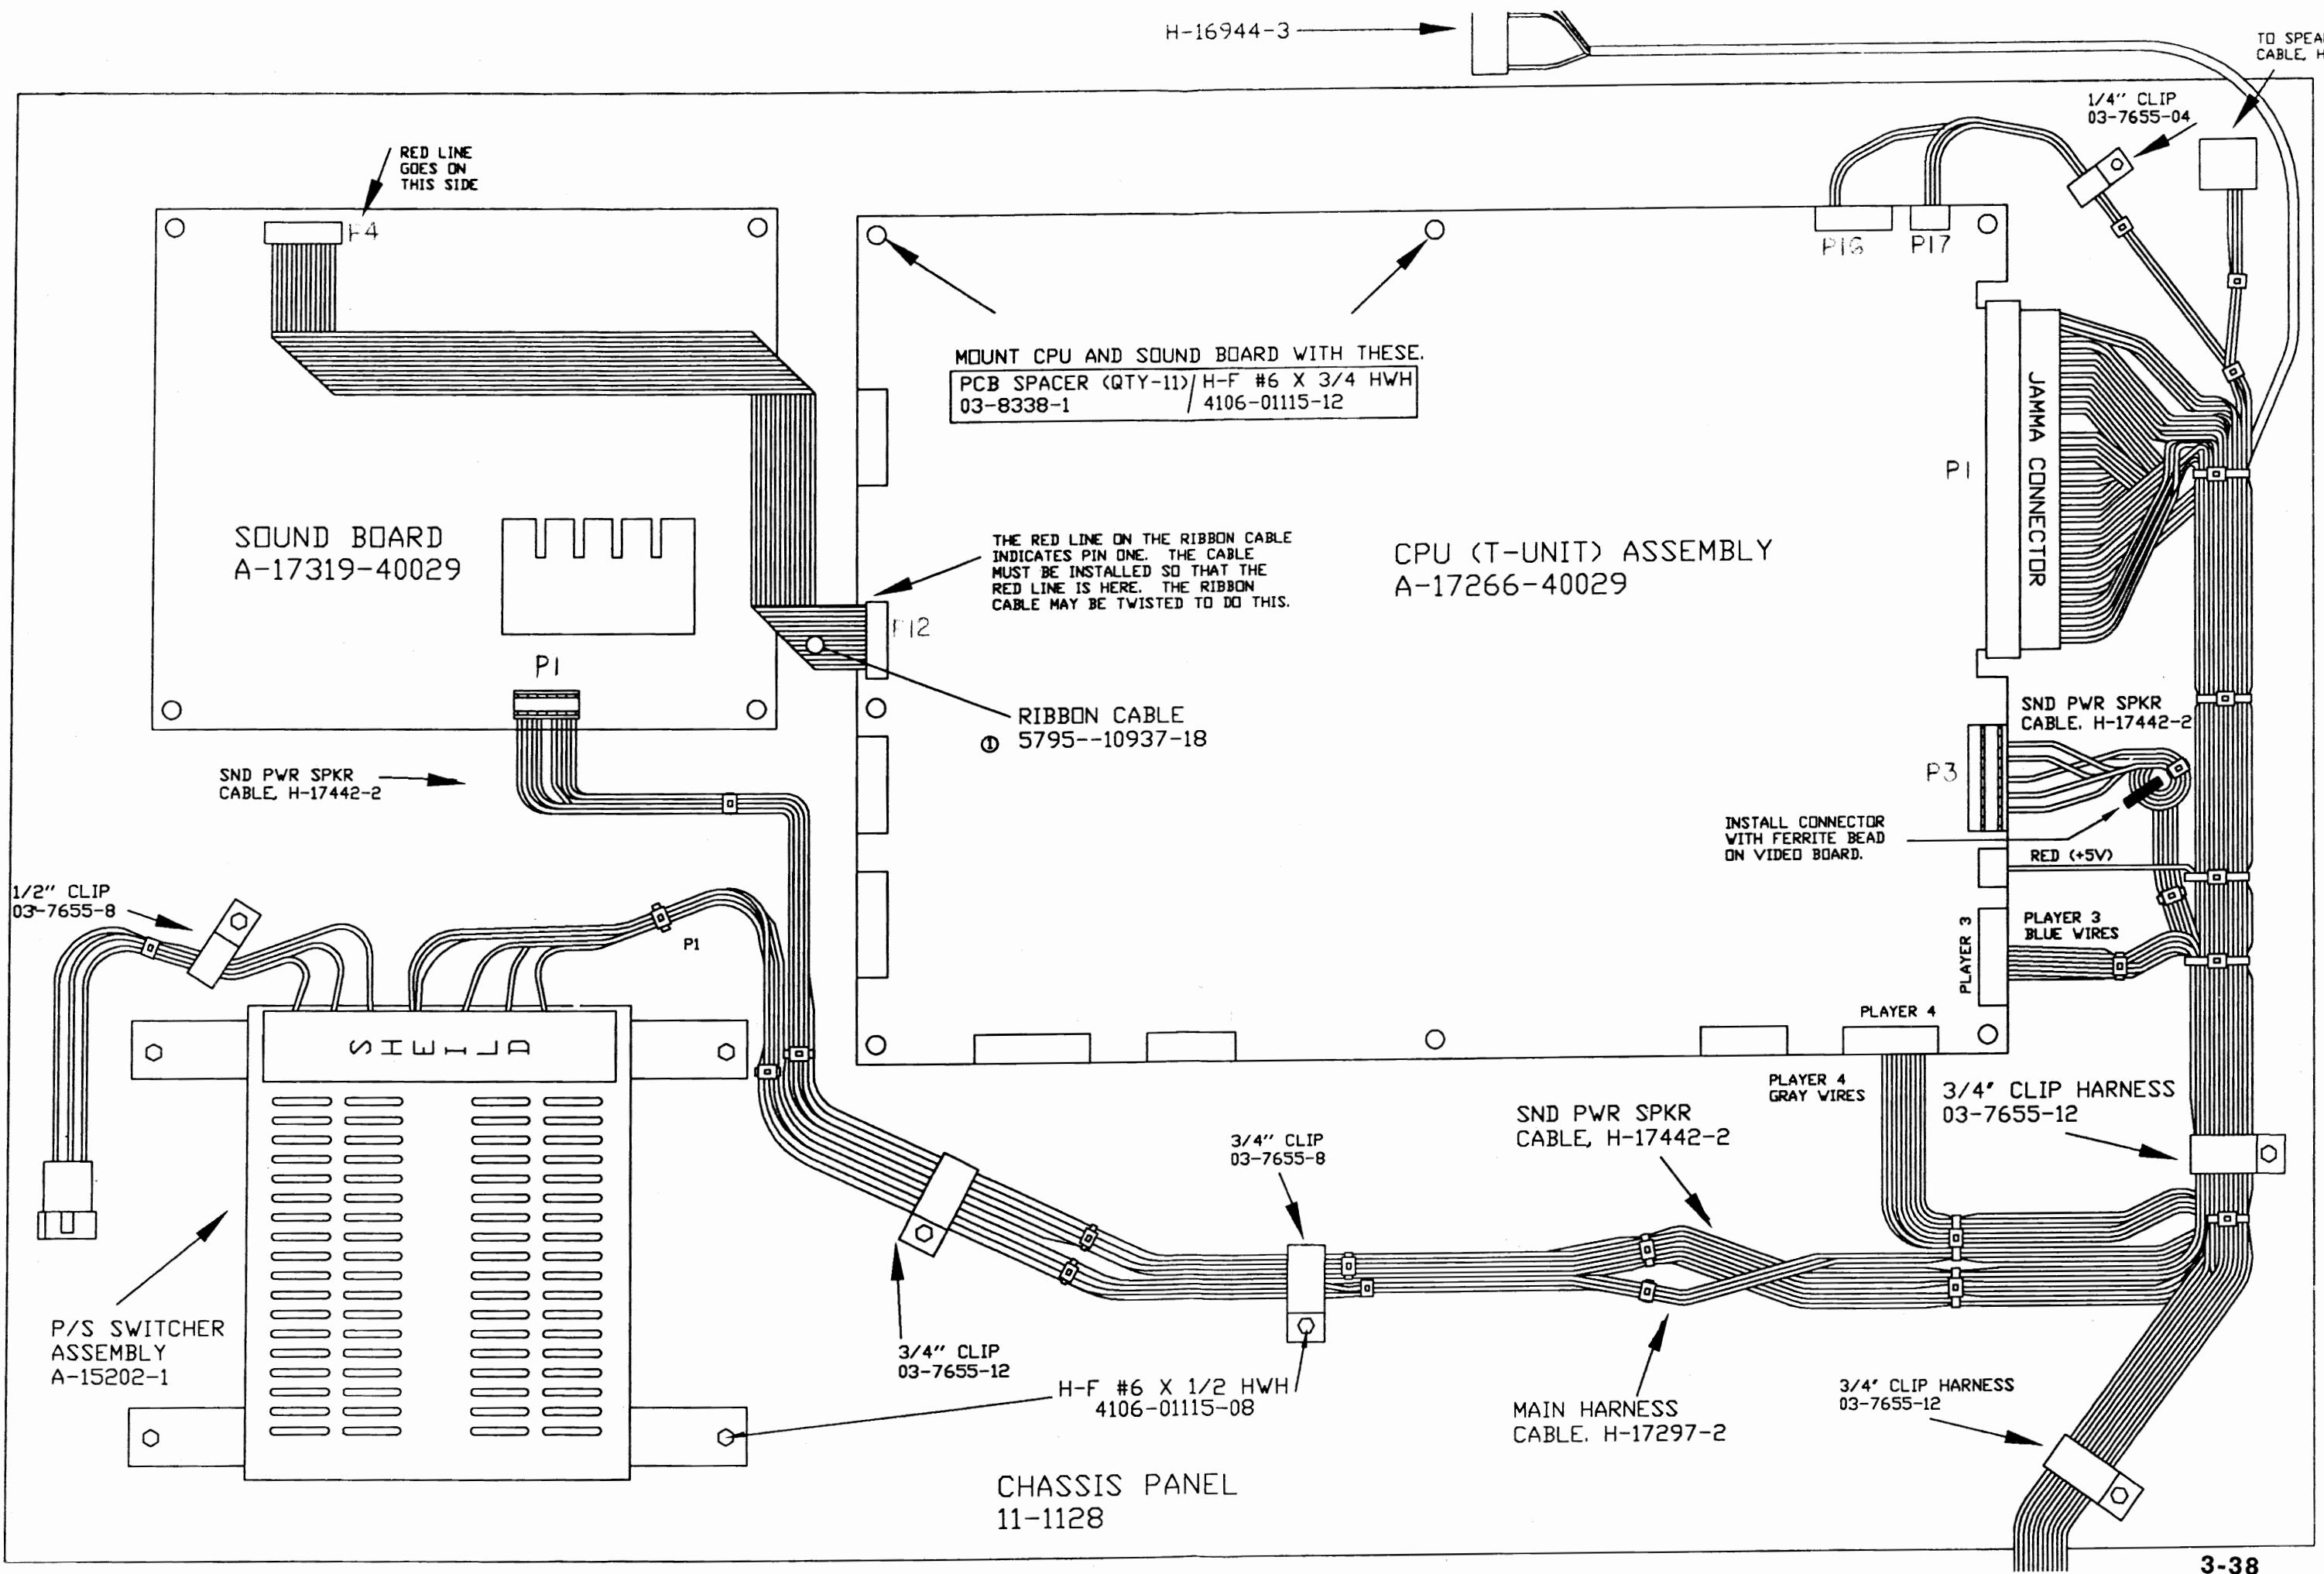

## Control Panel Wire Colors

### Player One

Start	White
Up (Jump)	White-Black
Down (Duck)	White-Brown
Left (Move)	White-Red
Right (Move)	White-Orange
High Punch	White-Yellow
Block	White-Green
High Kick	White-Blue
Low Punch	Blue-Black
Low Kick	Blue-Brown
Ground	Black

### Player Two

Start	Violet-White
Up (Jump)	Violet-Black
Down (Duck)	Violet-Brown
Left (Move)	Violet-Red
Right (Move)	Violet-Orange
High Punch	Violet-Yellow
Block	Violet-Green
High Kick	Violet-Blue
Low Punch	Blue-Yellow
Low Kick	Blue-Green
Ground	Black

## PC Board Jumpers

### CPU Board

J18, J19, J22, J24,      0Ω Resistor, 1/4W  
J28, R154

### Sound Board

J5, J8, J10, J13      Wire Insulated Jumper  
J1, J4, J6, J7, J15      0Ω Resistor, 1/4W

## **WARNINGS & NOTICES**

### **Warning**

USE OF NON-MIDWAY PARTS OR CIRCUIT MODIFICATIONS MAY CAUSE SERIOUS INJURY OR EQUIPMENT DAMAGE! USE ONLY MIDWAY AUTHORIZED PARTS.

- \* For safety and reliability, substitute parts and modifications are not recommended.
- \* Substitute parts or modifications may void FCC type acceptance.
- \* This game is protected by federal copyright, trademark and patent laws. Unauthorized modifications may be illegal under Federal law. This also applies to MIDWAY logos, designs, publications and assemblies. Moreover, facsimiles of MIDWAY equipment (or any feature thereof) may be illegal under federal law, regardless of whether or not such facsimiles are manufactured with MIDWAY components.

### **Warning**

**Note:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generated, uses and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### **Warning**

Prevent shock hazard and assure proper game operation. Only plug this game into a properly grounded outlet. Do not use a cheater plug to defeat the power cord's grounding pin. Do not cut off the ground pin.

### **Notice**

When MIDWAY ships a game, it is in compliance with FCC regulations. Your sticker is proof. If the sticker is missing or damaged, legal repercussions to the owner or distributor of the game may result. If your game does not contain an FCC sticker, call MIDWAY immediately.

### **Notice**

No part of this publication may be reproduced by any mechanical, photographic, or electronic process, or in the form of a phonographic recording, nor may be transmitted, or otherwise copied for public or private use, without permission from the publisher.

Entire contents of this manual copyright © 1993 MIDWAY Manufacturing Company, INC. All Rights Reserved.

**FOR SERVICE:  
CALL YOUR AUTHORIZED MIDWAY DISTRIBUTOR.**

**MIDWAY Manufacturing Company  
3401 N. CALIFORNIA AVE.  
CHICAGO, IL 60618**